



MASTER GLASS LED candles and lustres



MAS LEDCandleDT3.4-40W E14 927 B35CL G

Featuring a classic heritage design, Classic filament LED Lamps combine the familiar shapes of incandescent candles and lustres with the benefits of the long-lasting LED technology. It is an idea product to provide customers with cosy atmosphere. The MASTER LED candles and lustres can be dimmed for different lumen level and also for the different colour temperature. MASTER Glass Led Bulbs deliver significant energy savings, offering even 30% more compared to normal LED. They provide excellent quality of light. By offering a lifetime of 25,000 hours, the lamps reduce maintenance costs.

Product data

| General information | |
|-------------------------------------|-----------------------------------|
| Cap base | E14 [E14] |
| CE mark | Yes |
| EU RoHS compliant | Yes |
| Nominal lifetime (nom.) | 25000 h |
| Switching cycle | 20,000X |
| | Sphere |
| Tier | MASTER |
| Light technical | |
| Colour Code | 922-927 [CCT of 2,200 K-2,700 K] |
| Luminous flux (nom.) | 470 lm |
| Colour designation | Warm Glow (WG) |
| Correlated Colour Temperature (Nom) | 2200 2700 K |
| Luminous efficacy (rated) (nom.) | 138 lm/W |
| Colour consistency | <6 |
| Colour rendering index (nom.) | 90 |


| LLMF at end of nominal lifetime (nom.) | 70 % |
|--|-------------|
| Operating and electrical | |
| Input frequency | 50 to 60 Hz |
| Power (Rated) (Nom) | 3.4 W |
| Lamp current (nom.) | 24 mA |
| Wattage equivalent | 40 W |
| Starting time (nom.) | 0.5 s |
| Warm-up time to 60% light (nom.) | 0.5 s |
| Power factor (nom.) | 0.6 |
| Voltage (Nom) | 220-240 V |
| Temperature | |
| T-ambient (max.) | 45 °C |
| T-ambient (min.) | -20 °C |
| T-Case maximum (nom.) | 70 °C |

MASTER GLASS LED candles and lustres

| | |
|------------------------------------|----------------------------|
| Controls and dimming | |
| Dimmable | Only with specific dimmers |
| Mechanical and housing | |
| Lamp Finish | Clear |
| Bulb material | Glass |
| Bulb shape | B35 [B 35mm] |
| Approval and application | |
| Energy Efficiency Class | D |
| Energy consumption kWh/1,000 hours | 4 kWh |
| | 1109139 |

| | |
|-----------------------------------|--|
| Product data | |
| Full product code | 871951444941100 |
| Order product name | MAS LEDCandleDT3.4-40W E14 927 B35CL G |
| EAN/UPC – product | 8719514449411 |
| Order code | 44941100 |
| SAP numerator – quantity per pack | 1 |
| Numerator – packs per outer box | 10 |
| SAP material | 929003012282 |
| Net Weight (Piece) | 0.013 kg |


Dimensional drawing

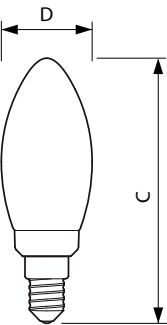


MAS LEDCandleDT3.4-40W E14 927 B35CL G

| Product | D | C |
|--|-------|-------|
| MAS LEDCandleDT3.4-40W E14 927 B35CL G | 35 mm | 97 mm |

Photometric data




Light Distribution Diagram

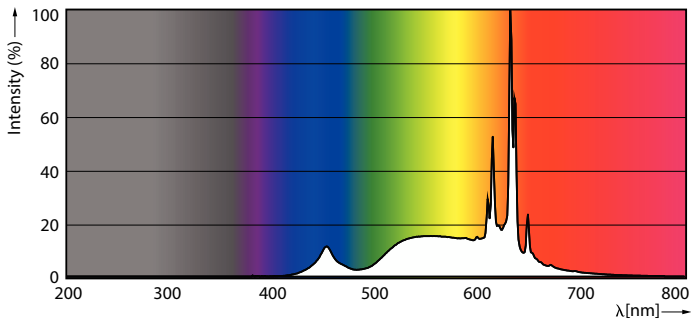

Spectral Power Distribution Colour

MASTER GLASS LED candles and lustres


Photometric data




General Uniform Lighting

General uniform lighting

Lifetime

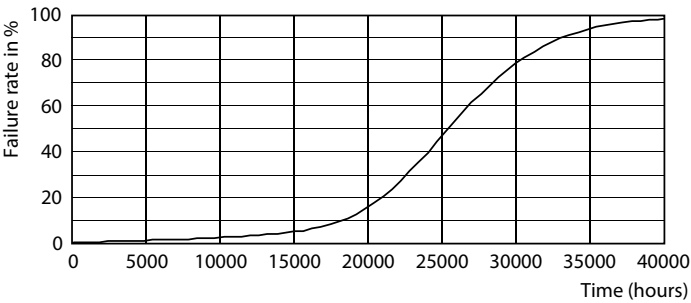

Life Expectancy Diagram

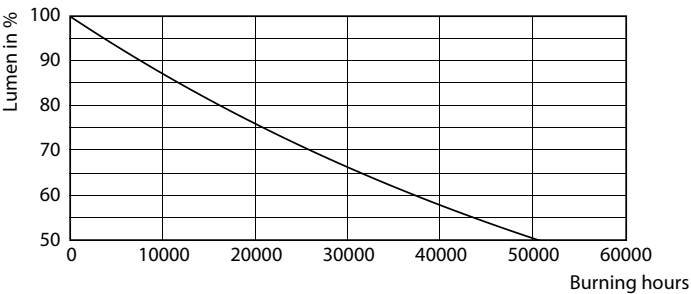

Lumen Maintenance Diagram

