




TM.ONTEC S20 M1X 60/180 M/NM ST

TM-S2.MXSTX060W

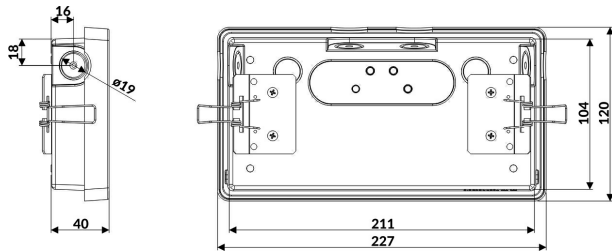

PARAMETERS

Application	anti-panic lighting
IP	IP65/IK08
IK	IK08
Version	ST – for button test
Power supply	210÷250 V AC 50+60 Hz
Temperature range	5-40 °C
Material	PC
Colour	white
Duration time	1 h
Operating mode	M
Active power	3.6 W
Insulation class	2
Luminance	0 cd/m ²
Battery	LiFePO ₄ /C 3.2V 1.5Ah

