

# PRODUCT DATASHEET

## SP FP FIX P 8W 927 PS DIM IP65 BK

SPOT FIRE RATED | Recessed mounted spotlight for certain fire-resistant ceilings, fixed



### Areas of application

- Direct replacement for recessed spotlights with halogen lamps
- Fire resistant ceilings
- Hotel rooms and corridors
- Bars, restaurants
- Galleries, museums

### Product benefits

- Fire-rated: Designed and tested to meet fire rating standards (in certain fire rated ceilings)
- Airtight construction for reduced air-leakage and limited energy loss
- Powerselect: Brightness adjustment via dip switches on the driver
- Easy replacement of external driver thanks to plug with bayonet lock
- Easy installation and electrical connection thanks to tool-free electrical connectors
- SCALE Design – great appearance, valuable materials and small size fits into every surrounding
- 5 years guarantee

### Product features

- Color rendering index  $R_a$ : 90
- Type of protection: IP65 (room side)
- Beam angle: 36°
- Die-cast aluminum housing
- Thermal expansion ribbon already preinstalled
- Silicon-pad protected springs



- Dimmable (with many common dimmers, see also [www.ledvance.com/dim](http://www.ledvance.com/dim))
- Through-wiring possible


## TECHNICAL DATA

### Electrical data


Nominal wattage	8.00 W
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Nominal current	38 mA
Inrush current	2 A
Inrush current time $T_{h50}$	60 $\mu$ s
Max. no. of lum. on circuit break. B16 A	336
Max. no. of lum. on circuit break. C10 A	210
Max. no. of lum. on circuit break. C16 A	336
Power factor $\lambda$	0.90
Total harmonic distortion	< 20 %
Protection class	II
Operating mode	Electronic control gear (ECG)

### Photometrical data

Luminous flux	640 lm
Luminous efficacy	80 lm/W
Color temperature	2700 K
Light color (designation)	Warm white
Color rendering index Ra	90
Standard deviation of color matching	$\leq 3$ sdc <sub>m</sub>
Low flicker	Yes
Photobiological safety group acc. to EN62778	RG1
Beam angle	36 °

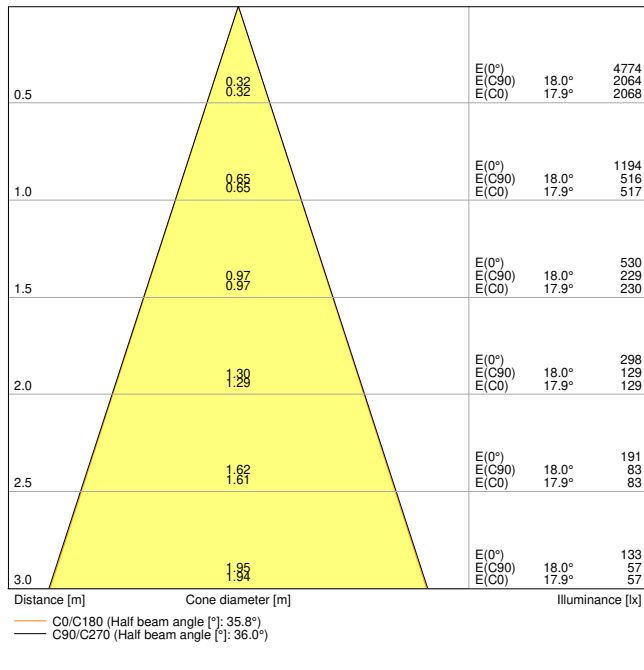


LDC typ cone

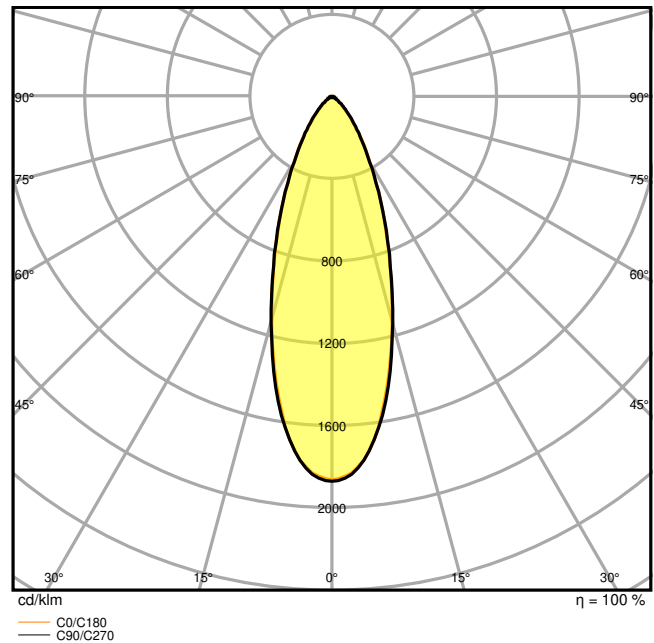

LDC typ polar

Dimensions & Weight

Diameter	81.00 mm
Height	42.00 mm
Product weight	240.00 g



Materials & Colors

Product color	Black
Housing color	Black
Body material	Aluminum
Cover material	Polymethylmethacrylate (PMMA)
Light emitting surface material	PMMA

Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

### Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-42...+80 °C
Type of connection	Push terminal
Type of protection	IP65/IP20
Protection class IK (shock resistance)	IK05
Dimmable	Yes
Type of dimming	PHASE CUT
Mounting type	Recessed
Mounting location	Ceiling
Application environment	Indoor
Mounting diameter	68 mm
Mounting depth	50,0 mm
Adjustable	No
LED module replaceable	Not replaceable
With light source	Yes

### Lifespan

Lifespan L70/B50 at 25 °C	50000 h
Lifespan L80/B10 at 25 °C	41000 h
Lifespan L90/B10 at 25 °C	18000 h
Number of switching cycles	100000

### Control gear

Output current	180 mA
ECG - Output ripple current	< 5 %
ECG - Length	68.00 mm
ECG - Width	55,0 mm
ECG - Height	22,0 mm

### Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No

## EQUIPMENT / ACCESSORIES

- External control gear included with dip-switches to select power during installation
- Selected DALI 2.0 driver available as accessory

## Safety advice

- Coordination with your responsible fire safety inspector is required in advance
- Fire rating tested for 30 min in fire-resistant ceiling RIGIPS SD12RF F30 according EN-1364-2
- Fire rating tested for 60 min in I-Joist ceiling system according BS 476-21

## DOWNLOAD DATA

### Documents and certificates



User instruction



Addon Technical Information



Packaging insert



Declarations Of Conformity CE



Certificates



Declarations Of Conformity UKCA

### Photometric and lighting design files



IES file (IES)



LDT file (Eulumdat)



ULD file (DIALux)



ROLF file (RELUX)






UGR file (UGR table)



LDC typ cone



LDC typ polar


CAD/BIM files	
	BIM_Revit_3D
	CAD_STEP_3D
Tender texts	
	Tender documents

### LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854000027	Folding box 1	100 mm x 105 mm x 85 mm	410.00 g	0.89 dm <sup>3</sup>
4099854000034	Shipping box 20	562 mm x 230 mm x 195 mm	8770.00 g	25.21 dm <sup>3</sup>

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

### ADDITIONAL CATALOG INFORMATION



	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	ON	ON	ON	Preset
	1 2	1 2	1 2	1 2
Current (CC)	85 mA	140mA	180mA	140mA
Power	4 W	6 W	8 W	6 W
% rated lumen	50 %	80 %	100 %	80 %



### References / Links

- For Guarantee see [www.ledvance.com/guarantee](http://www.ledvance.com/guarantee)

### Legal advice

- Installation hints in the current user instruction ([www.ledvance.com](http://www.ledvance.com)) must be observed

### DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

