


This drawing is property of FMT Zajecar, and must not be copied or reproduced in whole or in part, by any method whatsoever, without permission of FMT Ltd!

Crtež je vlasništvo firme FMT Zajecar. Svaka zloupotreba crteža, umnožavanje, prodaja trećoj strani ili upotreba u druge svrhe koje nisu dogovorene, je kažnjiva!

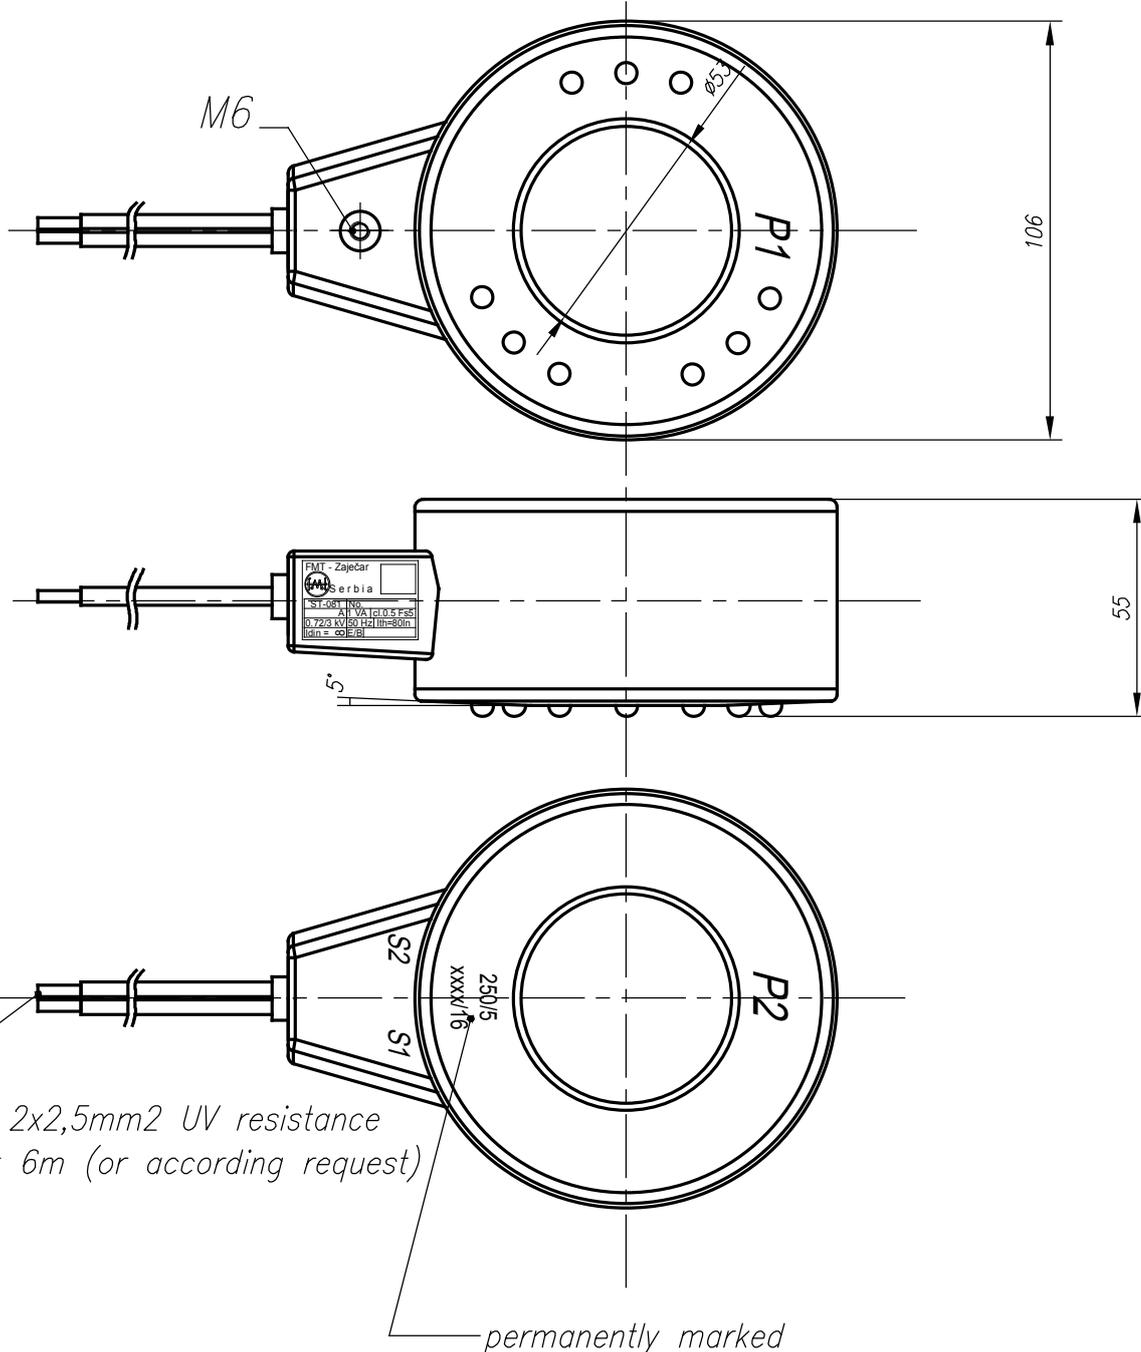

| TECHNICAL DATA | |
|--|--|
| Highest voltage for equipment | 0.72 kV |
| Rated power-frequency withstand voltage, 1 min | 3kV |
| Rated frequency | 50/60 Hz |
| Rated primary current | 250 A |
| Rated secondary current | 5 or 1A |
| Rated short-time thermal current | $I_{th} = 80I_n$ |
| Rated dynamic current | $I_{dyn} = \text{practically unlimited}$ |
| Rated continuous thermal current | $I_{th} = 1.2 I_n$ |
| Rated power | 1.5 VA |
| Rated accuracy class | 0.5 |
| Rated security factor | 5 |
| Number of cores | 1 |
| Insulation class | E/B |
| Type of mounting | outdoor mounting |
| Basic insulation type | epoxy resin (fire resistance) |
| Class of protection | min IP 44 |
| Normative references | IEC 61869-1; IEC 61869-2 |
| Mass | ~1.64kg |

| | | | | | | | |
|---------------------------------|--|------------------------------------|-------------|--------------------|--|------------------|-----------------------|
| Termicka obrada/Heat Treatment: | | Površinska zaštita/Surface Finish: | | Komada/Pcs.: | Dim.-Šifra reprodmat./Mat./Purchased Number: | Verzija/Version: | |
| Odgovorna osoba/Author: | | Datum/Date: | | Naziv/Description: | | | |
| Konst./Design By: | | G.Gitaric | | ST 081SM -53 | | | |
| Crtao/Drawn By: | | 14.06.2016. | | | | | |
| Odobrio/App.: | | Miodrag Gajic | | 14.06.2016. | | | |
| List/Sheet: | | Format: | Razmera/Sc: | Masa/Mass(kg): | Materijal/Material: | Oznaka/Number: | Kl. toler./Tol class: |
| Od / Of: | | A4 | 1:2 | | | ms 1143 | |

