


UR20-8AI-I-PLC-INT

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image



Inputs can be parameterised; up to 3-wire + FE; accuracy 0.1% FSR

Analogue input modules of the u-remote system are available in many variants with different resolutions and wiring solutions.

Variants are available with 12- and 16-bit resolution, which record up to 4 analogue sensors with ± 10 V, ± 5 V, 0...10 V, 0...5 V, 2...10 V, 1...5 V, 0...20 mA or 4...20 mA with maximum accuracy. Each plug-in connector can optionally connect sensors with 2- or 3-wire technology. The parameters for the measurement range can be individually set for each channel. In addition, each channel has its own status LED. A special variant for Weidmüller interface units enables current measurements with 16-bit resolution and maximum accuracy for 8 sensors at a time (0...20 mA or 4...20 mA).

The module electronics supply the connected sensors with power from the input current path (U_{IN}).

General ordering data

| | |
|-------------------|---|
| Version | Remote I/O module, IP20, Analog signals, Input, PLC |
| Order No. | 1315670000 |
| Type | UR20-8AI-I-PLC-INT |
| GTIN (EAN) | 4050118118810 |
| Qty. | 1 pc(s). |
| Replacement parts | 1350930000 1483950000 |

UR20-8AI-I-PLC-INT

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

| | | | |
|-----------------------------|---------|-----------------|------------|
| Depth | 76 mm | Depth (inches) | 2.992 inch |
| Height | 120 mm | Height (inches) | 4.724 inch |
| Width | 11.5 mm | Width (inches) | 0.453 inch |
| Mounting dimension - height | 128 mm | Net weight | 85 g |

Temperatures

| | | | |
|-----------------------------|-------------------|-----------------------------|-------------------|
| Storage temperature | -40 °C ... +85 °C | Operating temperature | -20 °C ... +60 °C |
| Operating temperature, min. | -20 °C | Operating temperature, max. | 60 °C |

analogue inputs

| | | | |
|------------------------------|---------------|---------------------------|--------------------|
| Accuracy | 0.1% FSR | Conversion time | 1 ms |
| Individual channel diagnosis | No | Internal resistance I | 50 Ω |
| Module diagnosis | Yes | Number of analogue inputs | 8 |
| Resolution | 16 Bit | Response time | < 0.1s |
| Reverse polarity protection | Yes | Sensor connection | PLC interface unit |
| Sensor supply | external | Short-circuit-proof | Yes |
| Type | Current input | | |

Connection data

| | | | |
|--|--------------------------------|--|----------------------|
| I/O plug-in connector | 20-pin ribbon cable connection | Type of connection | PUSH IN |
| Wire connection cross section, finely stranded, max. | 1.5 mm ² | Wire connection cross section, finely stranded, min. | 0.14 mm ² |
| Wire cross-section, finely stranded, max. (AWG) | AWG 16 | Wire cross-section, finely stranded, min. (AWG) | AWG 26 |
| Wire cross-section, solid, max. | 1.5 mm ² | Wire cross-section, solid, max. (AWG) | AWG 16 |
| Wire cross-section, solid, min. | 0.14 mm ² | Wire cross-section, solid, min. (AWG) | AWG 26 |

General data

| | | | |
|--------------------------|--|---------------------------|--|
| Air humidity (operation) | 10% to 95%, non-condensing as per DIN EN 61131-2 | Air humidity (storage) | 10% to 95%, non-condensing as per DIN EN 61131-2 |
| Air humidity (transport) | 10% to 95%, non-condensing as per DIN EN 61131-2 | Air pressure (operation) | ≥ 795 hPa (height ≤ 2000 m) as per DIN EN 61131-2 |
| Air pressure (storage) | 1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2 | Air pressure (transport) | 1013 hPa (height 0 m) to 700 hPa (height 3000 m) as per DIN EN 61131-2 |
| Pollution severity | 2 | Rail | TS 35 |
| Shock | 15 g over 11 ms, half sinus wave, acc. to IEC 60068-2-27 | Surge voltage category | II |
| Test voltage | 500 V | UL 94 flammability rating | V-0 |
| Vibration resistance | 5 Hz ≤ f ≤ 8.4 Hz: 3.5-mm amplitude as per IEC 60068-2-6, 8.4 Hz ≤ f ≤ 150 Hz: 1 g acceleration as per IEC 60068-2-6 | | |

UR20-8AI-I-PLC-INT

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Power supply

| | | | |
|--|---------|---|--|
| Current consumption from I_{IN} (the respective power segment) | < 20 mA | Current consumption from I_{sys} , typ. | 8 mA |
| Reverse polarity protection | Yes | Voltage supply | 24 V DC +20 %/ -15 %, via the system bus |

System data

| | | | |
|--------------------|------------------------------------|--|--|
| Diagnostic data | 1 Bit | Field bus protocol | PROFINET IRT, PROFINET RT, PROFIBUS DP-V1, EtherCAT, Modbus/TCP, EtherNet/IP, CANopen, DeviceNet, POWERLINK, CC-Link, CC-Link IE TSN |
| Galvanic isolation | 500 V DC between the current paths | Interface | u-remote system bus |
| Module type | Special module | Parameter data | 14 Byte |
| Process data | 16 Byte | Transmission speed of system bus, max. | 48 Mbit/s |

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC001596 | ETIM 7.0 | EC001596 |
| ETIM 8.0 | EC001596 | ETIM 9.0 | EC001596 |
| ECLASS 9.0 | 27-24-26-01 | ECLASS 9.1 | 27-24-26-01 |
| ECLASS 10.0 | 27-24-26-01 | ECLASS 11.0 | 27-24-26-01 |
| ECLASS 12.0 | 27-24-26-01 | ECLASS 13.0 | 27242601 |

UR20-8AI-I-PLC-INT

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com

Technical data

Tender specification sheets

| | |
|--------------------|--|
| Long specification | <p>Analogue input module 8AI-I-PLC-INT 8-channel analogue input module, positively switching Module for connecting ribbon cables/transfer elements Connection system: PUSH-IN Dimensions (HxWxD): 120 mm (with lever: 128 mm), 11.5 mm, 76 mm Module status: display via collective message, LED at the top of the module Channel status: indication directly at the contact point Weight: 73 g Module diagnosis: yes Individual channel diagnosis: no Reverse-polarity protection: no Operating temperature: -20°C - +60°C Process data: 16 bytes Parameter data: 14 bytes Diagnostic data: 1 bit Galvanic isolation: between field and system bus Supply voltage: 24 VDC +25% / -15% Internal current consumption: 8 mA Supply current consumption: 20 mA Accuracy: 0.1% FSR Conversion time: 1 ms Internal resistance I: approx. 50 Ω Resolution: 16 bits Brand: Weidmüller Type: UR20-8AI-I-PLC-INT</p> |
|--------------------|--|

Environmental Product Compliance

| | |
|------------|--------------------------------------|
| REACH SVHC | Lead 7439-92-1 |
| SCIP | 82327f13-cd27-455a-ab5b-a62e1996dcf8 |

Approvals

Approvals



| | |
|---------------------------|------------|
| ROHS | Conform |
| UL File Number Search | UL Website |
| Certificate no. (cULus) | E141197 |
| Certificate no. (cULusEX) | E223527 |

Creation date October 30, 2023 10:48:33 AM CET

UR20-8AI-I-PLC-INT

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data**Downloads**

| | |
|---|---|
| Approval/Certificate/Document of Conformity | KC certificate DNV/GL certificate DEMKO15ATEX1525X CCC certificate UKCA Declaration of Conformity - EN CE Declaration of Conformity - DE |
| Engineering Data | CAD data – STEP Compatibility information – Combinability of UR20 |
| Engineering Data | Zuken E3.S |
| Product Change Notification | Release-Notes - Firmware |
| User Documentation | MAN_U-REMOTE_DE MAN_U-REMOTE_EN |
| Catalogues | Catalogues in PDF-format |


UR20-8AI-I-PLC-INT

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany


www.weidmueller.com

Drawings

Block diagram

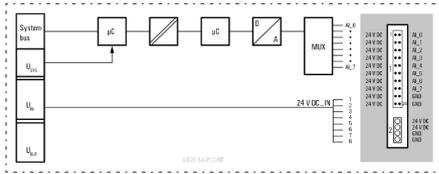

Connection diagram

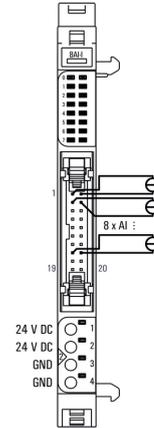

Explanation of abbreviations

Analogue input modules

