

Sensor-switched LED outdoor light

# L 260 S

EAN 4007841 007874

Article number 007874



LED

long life LED 25.000 h CRI 80

3000 K

3000K warm-white



infrared sensor 240°



max. 10 m



IP44



2 - 2000 lux



5 sec - 15 min



Light source not exchangeable



Control gear not exchangeable



soft light start

## Function description

The classic sensor. Now even more economical. STEINEL sensor-switched outdoor light L 260 S, ideal for building entrances, fronts of buildings, patio and side areas. 9,87 W STEINEL LED lamp, 703 lm, 240° infrared sensor, 12 m reach, high-quality stainless steel with opal glass shade.

## Technical specifications

Dimensions (L x W x H)	177 x 102 x 426 mm
With lamp	Yes, LED lamp
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
PU1, EAN	4007841007874
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Installation site	wall
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 50 °C
Housing material	Stainless steel
Cover material	Glass opal
Mains power supply	230 – 240 V / 50 Hz

Reach, radial	r = 6 m (75 m <sup>2</sup> )
Reach, tangential	r = 12 m (302 m <sup>2</sup> )
Photo-cell controller	Yes
Abdeckmaterial Lieferumfang	shrouds
Luminous flux total product	703 lm
Measured luminous flux (360°)	703 lm
Total product efficiency	71,2 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED can be replaced
LED life expectancy (max. °C)	25000 h
Base	E27
LED cooling system	Passive Thermo Control
Soft light start	Yes
Continuous light	selectable, 4h
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.

<https://www.steinel.de>

Subject to technical modifications

09.2023 Page 1 from 3

Sensor-switched LED outdoor light

# L 260 S

EAN 4007841 007874  
Article number 007874



## Technical specifications

Output	9,87 W	Basic light level function	No
Mounting height max.	6,00 m	Interconnection	No
Slave modeselectable	No	Colour Rendering Index CRI	= 82
Sneak-by guard	Yes	Optimum mounting height	2 m
Capability of masking out individual segments	Yes	Detection angle	240 °
Electronic scalability	No		
Mechanical scalability	No		


## Accessories

EAN 4007841 008314	LED linear lamp for L 260 LED
EAN 4007841 001353	Replacement glass shade for L 260 S

# L 260 S


EAN 4007841 007874  
Article number 007874

## Detection Zone

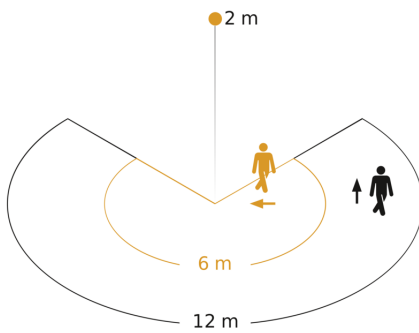

Possible mounting height: 1,80 m - 6,00 m  
Orange: radial  
Black: tangential

## Dimension Drawing

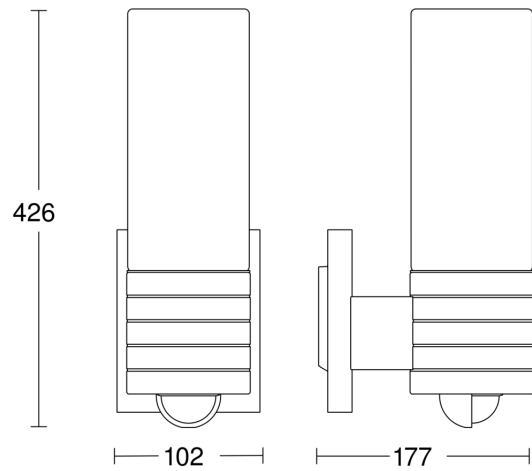

## Circuit diagram

