


XLED home 2

V2 graphite

EAN 4007841 033095

Article number 033095

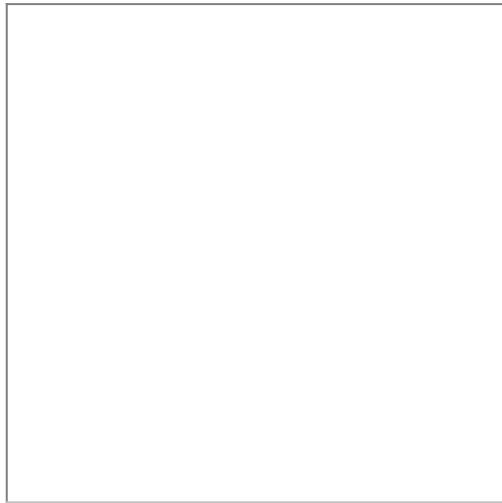

LED

3000 K



5 years



30 years (Ø 4,5h / day)

3000K warm-white

IP44

Panel 180° hor., 180° ver.

networkable via cable

energy saving

manufacturer's warranty steinel.de/garantie5

Light source not exchangeable

Control gear not exchangeable

CE

Function description

Dazzlingly stylish LED floodlight. XLED home 2 – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant wide-area lighting (1550 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

Technical specifications

Dimensions (L x W x H)	161 x 180 x 181 mm	Cover material	Plastic, opal
With lamp	Yes, STEINEL LED system	Mains power supply	220 – 240 V / 50 – 60 Hz
With motion detector	No	Photo-cell controller	No
Manufacturer's Warranty	5 years	Luminous flux total product	1550 lm
Version	graphite	Measured luminous flux (360°)	1550 lm
PU1, EAN	4007841033095	Total product efficiency	113 lm/W
Application, place	Outdoors	Colour temperature	3000 K
Application, room	outdoors, all round the building, terrace / balcony, courtyard & driveway	Colour variation LED	SDCM3
Installation site	wall, corner	Lamp	LED cannot be replaced
Installation	Surface wiring, corner, Wall	LED life expectancy (max. °C)	50000 h
Impact resistance	IK03	Service life LED L70B50 (25°)	> 60000 h
IP-rating	IP44	Drop in luminous flux in accordance with LM80	L70B10
Protection class	II	LED cooling system	HCMC (High Conductive Magnesium Composite)
Ambient temperature	-20 – 40 °C	Output	13,7 W
Housing material	HCMC	Colour Rendering Index CRI	= 82

LED floodlight without sensor

XLED home 2

V2 graphite

EAN 4007841 033095

Article number 033095



Accessories

EAN 4007841 055875

Corner wall mount XLED home 2 / PRO 240


EAN 4007841 053086

Corner wall mount XLED Home 2 / Pro 240


EAN 4007841 055615

Corner wall mount XLED home 2 / PRO 240

Dimension Drawing

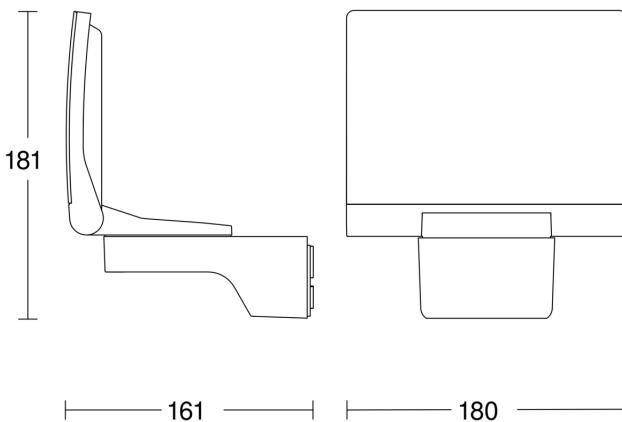

Light Distribution Curve

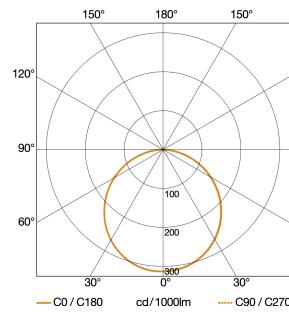

Output	13,7 W
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
Measured luminous flux (360°)	1550 lm
90° Colour temperature	3000 K
Colour Rendering Index	80-89
60° LED life expectancy (max. °C)	50000 h
LED cooling system	HCMC (High Conductive Magnesium Composite)

Master/slave interconnection circuit diagram

