LED floodlight without sensor



V2 black EAN 4007841 033118 Article number 033118





#### **Function description**

Dazzlingly stylish LED floodlight. XLED home 2 – the outdoor floodlight without sensor. Freely swivelling LED panel with new opal cover for pleasant widearea lighting (1550 lm at 13,7 W). Swivelling range: 180° (horizontally and vertically). Cooling system of high thermal conductivity magnesium composite (HCMC).

### **Technical specifications**

Dimensions (L x W x H)	161 x 180 x 181 mm	Cover material	Plastic, opal
With lamp	Yes, STEINEL LED system	Mains power supply	220 – 240 V / 50 – 60 Hz
With motion detector	No	Photo-cell controller	No
Manufacturer's Warranty	5 years	Luminous flux total product	1550 lm
Version	black	Measured luminos flux (360°)	1550 lm
PU1, EAN	4007841033118	Total product efficiency	113 lm/W
Application, place	Outdoors	Colour temperature	3000 K
Application, room	outdoors, all round the building, terrace / balcony, courtyard & driveway	Colour variation LED	SDCM3
		Lamp	LED cannot be replaced
Installation site	wall. corner	LED life expectancy (max. °C)	50000 h
Installation	Surface wiring, corner, Wall	Service life LED L70B50 (25°)	> 60000 h
Impact resistance	IK03	Drop in luminous flux in accordance with LM80	L70B10
IP-rating	IP44	LED cooling system Composite)	HCMC (High Conductive Magnesium
Protection class	II		8
Ambient temperature	-20 - 40 °C	Output	13,7 W
Housing material	НСМС	Colour Rendering Index CRI	= 82

Page 1 from 2

09.2023

XLED home 2


V2 black EAN 4007841 033118 Article number 033118

# Accessories

EAN 4007841 055875	Corner wall mount XLED home 2/ PRO 240
EAN 4007841 053086	Corner wall mount XLED Home 2/ Pro 240
EAN 4007841 055615	Corner wall mount XLED home 2/ PRO 240

### **Dimension Drawing**

#### **Light Distribution Curve**

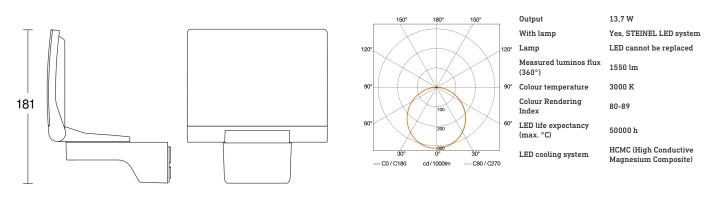

— 180 ———

## Master/slave interconnection circuit diagram

