

LED floodlight without sensor - Professional Line

XLED PRO ONE Max

without motion detector
EAN 4007841 069520
Article number 069520



LED

long life LED 50.000 h

3000 K

3000K warm-white



IP44



Panel 180° vertical



indoor/outdoor light



networkable via cable



energy saving



Light source not exchangeable



Control gear not exchangeable



plastic free packaging

Function description

Floodlights redefined. Housed in a sophisticated aluminium enclosure, the 180° vertically swivelling floodlight XLED PRO ONE Max without sensor guarantees daylight-bright illumination across large areas with warm white 3000 K and 6093 lm at 49,4 W. Suitable for manual switch operation and for cable-based networking in conjunction with a sensor version. With optional surface-mounting adapter. 5-year guarantee.

Technical specifications

Dimensions (L x W x H)	202 x 259 x 226 mm
With lamp	Yes, STEINEL LED system
With motion detector	No
Manufacturer's Warranty	5 years
Version	without motion detector
PU1, EAN	4007841069520
Application, place	Outdoors
Application, room	outdoors, garden, front door, courtyard & driveway, all round the building, Indoors
Colour	Anthracite
Includes corner wall mount	No
Installation site	ceiling, wall
Installation	Surface wiring, Wall
Impact resistance	IK03
IP-rating	IP44
Protection class	I
Ambient temperature	-20 – 40 °C

Photo-cell controller	No
Abdeckmaterial Lieferumfang	shrouds
Luminous flux total product	6093 lm
Measured luminous flux (360°)	6093 lm
Total product efficiency	123 lm/W
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Service life LED L70B50 (25°)	> 36000 h
LED cooling system	Passive Thermo Control
Functions	Relay output
Basic light level function	No
Main light adjustable	No
Twilight setting TEACH	No
Interconnection	Yes
Interconnection via	Cable
Output	49,4 W

<https://www.steinell.de>

Subject to technical modifications

10.2023 Page 1 from 3

LED floodlight without sensor - Professional Line

XLED PRO ONE Max

without motion detector
EAN 4007841 069520
Article number 069520



Technical specifications

Housing material	Aluminium	Colour Rendering Index CRI	= 80
Cover material	Glass transparent		
Mains power supply	220 – 240 V / 50 – 60 Hz		

Accessories

EAN 4007841 080983	Surface mount adapter XLED PRO ONE Plus + Max
EAN 4007841 079000	RC 12


LED floodlight without sensor - Professional Line

XLED PRO ONE Max


without motion detector
EAN 4007841 069520
Article number 069520



Dimension Drawing

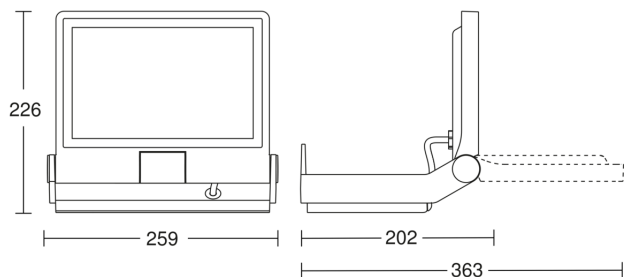

Slave circuit diagram



Master/slave interconnection circuit diagram

