

RS D2 S

V3
 EAN 4007841 052539
 Article number 052539



LED

3000 K

Hochfrequenz
Sensor 360°

Ø 3 - 8 m



2 - 2000 Lux



5 Sek - 15 Min

Manuelle
Übersteuerung 4
Std

Innenleuchte



Energie sparen

3 years

Herstellergarantie

Function description

Shining light. STEINEL high-frequency sensor-switched indoor light RS D2 S with brushed stainless-steel surround, ideal for corridors, hallways, stairwells and bathrooms. 8,8 W with 886 lm, STEINEL LED lighting system, 360° high-frequency sensor with 3-8 m reach, switches light ON without a sound, with ambient light, night-light function and 4-hour manual override (3000 K).

Technical specifications

Dimensions (L x W x H)	66 x 300 x 300 mm
With lamp	Yes, STEINEL LED system
With motion detector	Yes
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
PU1, EAN	4007841052539
Application, place	Indoors
Application, room	corridor / aisle, function room / ancillary room, stairwell, WC / washroom, outdoors, Indoors
Colour	white
Installation site	wall, ceiling
Installation	Wall, Ceiling, Surface wiring
Impact resistance	IK03
IP-rating	IP20
Protection class	II
Ambient temperature	-10 – 40 °C

Reach, tangential	Ø 8 m (50 m ²)
Photo-cell controller	Yes
Transmitter power	< 1 mW
Luminous flux total product	886 lm
Colour temperature	3000 K
Colour variation LED	SDCM3
Lamp	LED cannot be replaced
Base	without
LED cooling system	Passive Thermo Control
Soft light start	No
Continuous light	selectable, 4h
Twilight setting	2 – 2000 lx
Time setting	5 s – 15 Min.
Basic light level function	Yes
Basic light level function time	10/30 min, all night
Twilight setting TEACH	No
Interconnection	No

Sensor-switched LED indoor light

RS D2 S

V3

EAN 4007841 052539

Article number 052539



Technical specifications

Housing material	Plastic
Cover material	Plastic, opal
Mains power supply	220 – 240 V / 50 – 60 Hz
Power consumption	0,38 W
Mounting height max.	4,00 m
HF-system	5,8 GHz
Detection	also through glass, wood and stud walls
Capability of masking out individual segments	No
Electronic scalability	Yes
Mechanical scalability	No
Reach, radial	Ø 8 m (50 m ²)

Fuse protection B10	54
Fuse protection B16	87
Fuse protection C10	90
Fuse protection C16	145
Basic light level function in per cent	10 %
Output	8,8 W
Angle of aperture	160 °
IP-rating, ceiling	IP20
Detection angle	360 °

Sensor-switched LED indoor light

RS D2 S


V3

EAN 4007841 052539

Article number 052539




Detection Zone

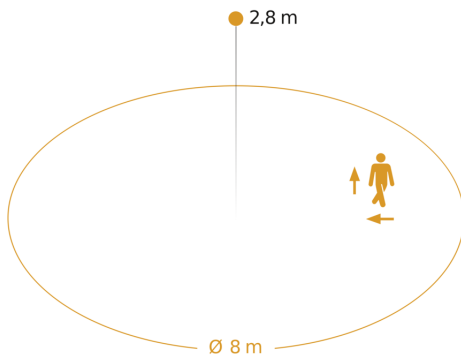

Possible mounting height: 2,00 m - 4,00 m

Orange: radial and tangential

Dimension Drawing

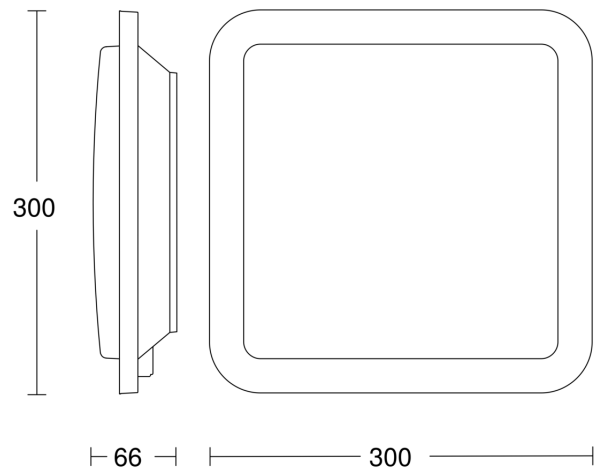

Circuit diagram

