
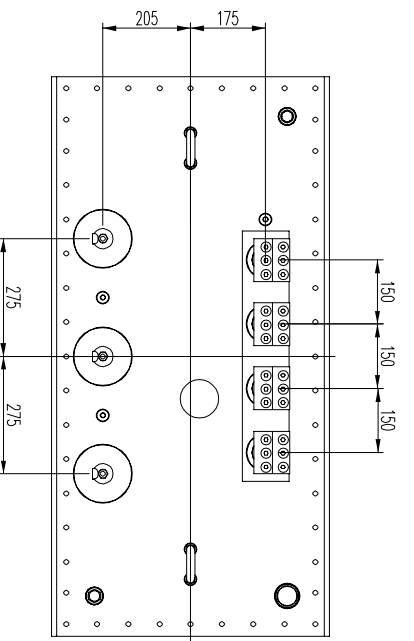



DESCRIPTION	
1	COVER
2	EARTHING TERMINAL M12x25 (COVER)
3	EARTHING TERMINAL M12x25 (TANK)
4	HV BUSHINGS - DT10NF60
5	LIFTING LUG
6	LV BUSHINGS - 14V/1250 EN 50386
7	MANUAL DRIVE OF TAP CHANGER
8	OIL DRAIN VALVE
9	OIL FILLING PIPE
10	RATING PLATE
11	TANK
12	THERMOMETER
13	THERMOMETER POCKET
14	UNDERBASE



Slinness Factor -	1.818	630 kVA - 10500/420 V	HV BIL LEVEL - U75AC28
APPROXIMATED MASSES (kg)			
OIL MASS	OIL VOLUME (dm ³)	ACTIVE PART MASS	TANK FITTING MASS
365	409	1491	370
			1581
			2193

Prep.	J.Kopka 2020-05-15	Resp. depl.	-	Title	OUTLINE
App.	J.Pokula / W.Zelinski		-		
Rev.	A	Rev.by	J.Kopka 2020-06-22	Rev.app.	J.Pokula / W.Zelinski
		Scale	-		1:1
		Doc. No.	11PM017121A630		