



off switch 63A 1-pole, with red handle

Model	
product brand name	SENTRON
product designation	On/Off switches
design of the product	1 NO red
design of the switching function	Switch disconnecter
General technical data	
number of poles	1
short-circuit current rating	10 kA
type of voltage of the operating voltage	AC
Supply voltage	
operating voltage rated value	250 V
value range of the operating frequency	50/60 Hz
Protection class	
protection class IP	other
Breaking Capacity	
switching capacity current rated value	0.196 kA
Dissipation	
power loss [W] for rated value of the current at AC in hot operating state per pole	2.2 W
Main circuit	
operational current rated value	63 A
Product details	
product component signal lamp	No
number of NO contacts	1
Product function	
product function positive opening (acc. to DIN VDE 0113)	No
connectable conductor cross-section for flexible conductor with core end processing	
• minimum	1 mm <sup>2</sup>
• maximum	35 mm <sup>2</sup>
connectable conductor cross-section for rigid conductor	
• minimum	1 mm <sup>2</sup>
• maximum	35 mm <sup>2</sup>
tightening torque with screw-type terminals	
• minimum	2.5 N·m
• maximum	3 N·m
Mechanical Design	
height	89.8 mm
depth	74.5 mm
installation depth	70 mm

number of modular width units	1
net weight	108 g
ambient temperature during operation	
• minimum	-5 °C
• maximum	40 °C
ambient temperature during storage minimum	-25 °C

#### Approvals Certificates

##### General Product Approval



[Confirmation](#)



[Miscellaneous](#)

General Product Ap-  
approval

other

Environment



[Miscellaneous](#)

[Environmental Con-  
firmations](#)

#### Further information

##### Information on the packaging

<https://support.industry.siemens.com/cs/ww/en/view/109813875>

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

##### Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5TL1163-1>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5TL1163-1>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5TL1163-1](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TL1163-1)

##### CAX-Online-Generator

<http://www.siemens.com/cax>

##### Tender specifications

<http://www.siemens.com/specifications>

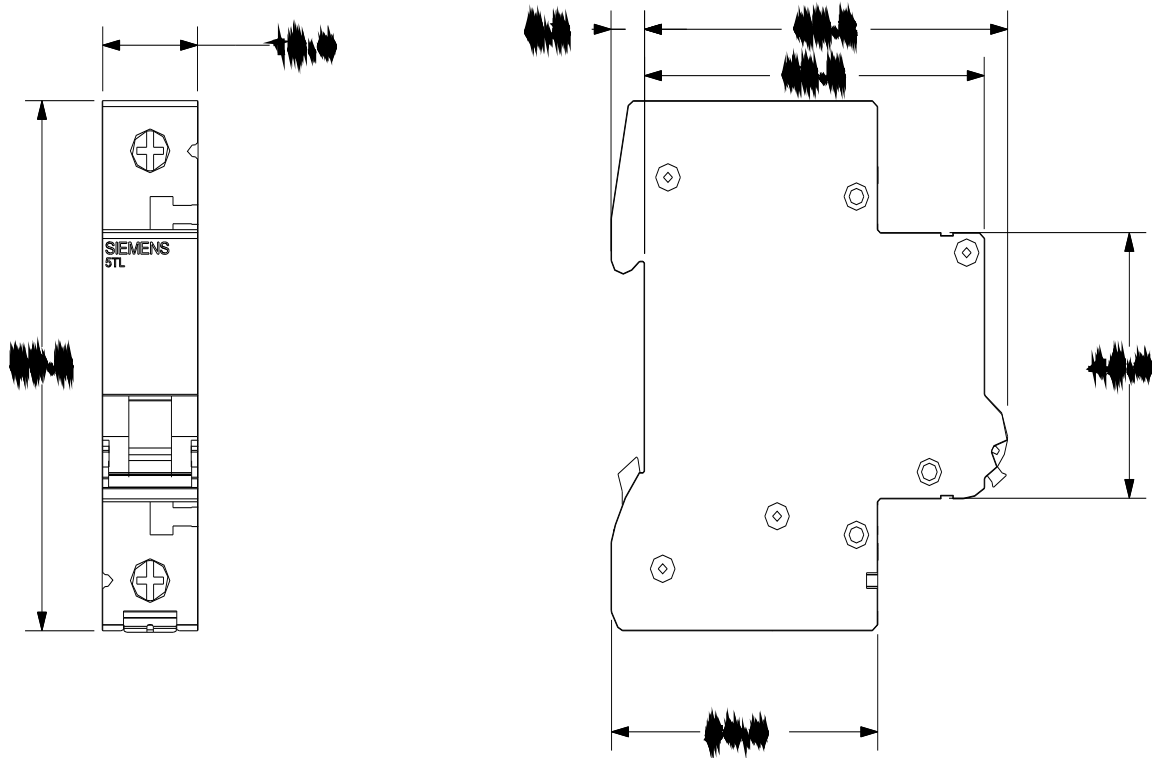

---

last modified:

7/20/2022 