

# XB6DF3B1B

Complete illuminated push button, Harmony XB6, green rectangular flush, 16mm, latching  
1NO 12...24V



## Galvenā

Produkta sērija	Harmony XB6
Produkta vai sastāvdaļas veids	Complete illuminated push-button
Ierīces īsais nosaukums	XB6
Bezel material	Plastic
Mounting diameter	16 mm
Daudzums nedalāms	1
Shape of signaling unit head	Rectangular
Type of operator	latching
Operator profile	Green flush, unmarked
Kontaktligzdas tips	1 NO
Contact operation	Slow-break
Connections - terminals	Faston connectors 2.8 x 0.5 mm
Gaismas avots	LED
Spuldzes savienojums	Integral LED
[Us] rated supply voltage	12...24 V AC/DC

## Papildinošs

Augstums	18 mm
Platums	24 mm
Dziļums	57 mm
Terminals description ISO n°1	(13-14)NO
Neto svars	0,022 kg
Operating position	Any position
Positive opening	With EN/IEC 60947-5-1 appendix K
Operating travel	1 Mm NO changing electrical state) 3,5 mm total travel)
Operating force	3,5 N NO changing electrical state
Kontaktligzdas materiāls	Silver alloy (Ag/Ni)
Short-circuit protection	6 A cartridge fuse gG
[Ui] rated insulation voltage	250 V 3)EN/IEC 60947-1
[Uimp] rated impulse withstand voltage	4 kV EN/IEC 60947-1
[Ie] rated operational current	3 A 120 V, AC-15, B300 EN/IEC 60947-5-1 1,5 A 240 V, AC-15, B300 EN/IEC 60947-5-1 0,1 A 250 V, DC-13, R300 EN/IEC 60947-5-1 0,22 A 125&nbsp;V, DC-13, R300 EN/IEC 60947-5-1
Electrical durability	1000000 Cikli, AC-15 230 V 3600 cikls/h 0,5 EN/IEC 60947-5-1 appendix C 1000000 cikli, DC-13 230 V 3600 cikls/h 0,5 EN/IEC 60947-5-1 appendix C
Electrical reliability	$\Lambda = 10\exp(-8) 5 V 1 mA$ with confidence level of 90 % IEC 60947-5-4
Signāla veids	Steady
Supply voltage limits	6...30 V AC/DC
Strāvas patēriņš	15 mA
Surge withstand	1 KV direct contact IEC 61000-4-5 2 kV in free air IEC 61000-4-5

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.






## Vide

Aizsargparklājumus	TC
Apkārtējā gaisa temperatūra uzglabāšanai	-40...70 °C
Apkārtējā gaisa temperatūra darbībai	-25...70 °C
Electrical shock protection class	II klase IEC 61140
IP degree of protection	IP65 IEC&nbsp;60529
NEMA degree of protection	NEMA 13 UL 50 NEMA 4 UL 50 NEMA 4X UL 50 NEMA 13 CSA C22.2 No 94 NEMA 4 CSA C22.2 No 94 NEMA 4X CSA C22.2 No 94
Standarti	CSA C22.2 No 14 JIS C 4520 UL 508 EN/IEC 60947-5-1 EN/IEC 60947-5-5 EN/IEC 60947-1 JIS C 852
Produkta sertifikācija	CSA[RETURN]GOST[RETURN]UL[RETURN]CCC
Vibration resistance	+/- 3 mm 2...500 Hz)IEC 60068-2-6 5 gn 2...500 Hz)IEC 60068-2-6
Shock resistance	30 gn 18 ms) half sine wave acceleration IEC 60068-2-27 50 gn 11 ms) half sine wave acceleration IEC 60068-2-27
Resistance to fast transients	2 kV IEC 61000-4-4
Resistance to electromagnetic fields	10 V/m IEC 61000-4-3
Resistance to electrostatic discharge	6 KV on contact (on metal parts) IEC 61000-4-2 8 kV in free air (in insulating parts) IEC 61000-4-2
Electromagnetic emission	Class B IEC 55011

## Iepakojšanas vienības

Pirmā iepakojuma vienības tips	PCE
Vienību skaits 1. iepakojumā	1
1. iepakojuma augstums	2,000 cm
1. iepakojuma platums	11,000 cm
1. iepakojuma garums	16,000 cm
1. iepakojuma svars	15,000 g
Otrā iepakojuma vienības tips	S01
Vienību skaits 2. iepakojumā	60
2. iepakojuma augstums	15,000 cm
2. iepakojuma platums	15,000 cm
2. iepakojuma garums	40,000 cm
2. iepakojuma svars	1,129 kg

## Piedāvājiet ilgtspēju

Ilgtspējīgs piedāvājuma statuss	Green Premium izstrādājums
REACH regula	
ES RoHS direktīva	Proaktīva atbilstība (uz izstrādājumu neattiecas ES RoHS juridiskās saistības)
Nesatur dzīvsudrabu	Jā
Ķīnas RoHS regula	
Informācija par RoHS izņēmumiem	
Vides informācijas publicēšana	
Cirkularitātes profils	
WEEE	Eiropas Savienības tirgū no šī produkta ir jāatbrīvojas, ievērojot noteiktu atkritumu savākšanas kārtību, un produkts nedrīkst nonākt sadzīves atkritumu tvertnēs.

## Līguma garantija

---

Garantija

18 months


---

---

Rectangular Head Pushbutton

---

Dimensions

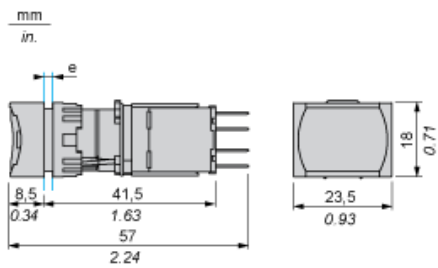

e panel thickness 1 to 6 mm/0.03 to 2.48 in.

---

Panel Cut-out

---

For Rectangular Head

$\frac{\text{mm}}{\text{in.}}$

