



Galvenā

Saderība ar	Altivar Machine ATV340 Altivar Process ATV900 Easy Altivar 310
Produkta vai sastāvdaļas veids	Braking resistor
Vērtība (Ω)	16 Ohm
[Ue] nominālais darbības spriegums	24&Nbsp;V DC 250 V AC

Papildinošs

Product compatibility	Variable speed drive ATV930 wall mount 18,5 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 22 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 30 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 18,5 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 22 kW 380...480 V medium cycle Variable speed drive ATV950 wall mount 30 kW 380...480 V medium cycle Variable speed drive ATV930 wall mount 5,5 kW 200...240 V severe cycle Variable speed drive ATV340 15 kW 380...480 V medium cycle Variable speed drive ATV340 18 kW 380...480 V medium cycle Variable speed drive ATV340 22 kW 380...480 V medium cycle Variable speed drive ATV930 22 kW 500...690 V medium cycle Variable speed drive ATV930 30 kW 500...690 V medium cycle Variable speed drive ATV930 37 kW 500...690 V medium cycle Variable speed drive ATV930 32 hp 600 V medium cycle Variable speed drive ATV930 40 hp 600 V medium cycle Variable speed drive ATV930 50 hp 600 V medium cycle
Duty cycle	Severe cycle (heavy duty) <54 s braking with 100 % braking torque for a 120 s cycle Medium cycle (normal duty) <4 s braking with 135 % braking torque for a 40 s cycle Medium cycle (heavy duty) <4 s braking with 165 % braking torque for a 40 s cycle Severe cycle (heavy duty) <6 s braking with 165 % braking torque for a 120 s cycle
Average power available	1,9 kW 50 °C
Electrical connection	Terminal <= 10 mm ² / AWG 8 drive Terminal <= 2.5 mm ² / AWG 12 temperature control switch
Protection type	Thermal protection via drive or temperature control switch 120 °C
Platums	290 mm
Augstums	570 mm
Dziļums	180 mm
Neto svars	6,4 kg

Vide

IP aizsardzības pakāpe	IP20
Apkārējā gaisa temperatūra uzglabāšanai	-25...70 °C
Apkārējā gaisa temperatūra darbībai	0...50 °C

The information provided in this documentation contains general descriptions and/or technical characteristics of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Iepakojšanas vienības


Pirmā iepakojuma vienības tips	PCE
Vienību skaits 1. iepakojumā	1
1. iepakojuma augstums	25,500 cm
1. iepakojuma platums	58,000 cm
1. iepakojuma garums	30,500 cm
1. iepakojuma svars	7,211 kg
Otrā iepakojuma vienības tips	P06
Vienību skaits 2. iepakojumā	4
2. iepakojuma augstums	75,000 cm
2. iepakojuma platums	60,000 cm
2. iepakojuma garums	80,000 cm
2. iepakojuma svars	37,632 kg

Piedāvājiēt ilgtspēju

REACH regula	REACH Deklarācija
Nesatur REACH SVHC	Jā
ES RoHS direktīva	Proaktīva atbilstība (uz izstrādājumu neattiecas ES RoHS juridiskās saistības) ES RoHS deklarācija
Nesatur toksiskus smagos metālus	Jā
Nesatur dzīvsudrabu	Jā
Ķīnas RoHS regula	Ķīnas RoHS Deklarācija
Informācija par RoHS izņēmumiem	Jā

Dimensions

Right Side and Front View

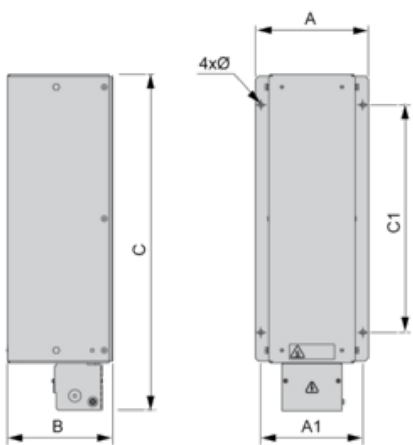

Dimensions in mm

A	B	C	A1	C1	Ø
290	180	570	270	380	6.6 x 9


Dimensions in in.

A	B	C	A1	C1	Ø
11.42	7.09	22.44	10.63	14.96	0.26 x 0.35

Mounting and Clearance




(1) Braking resistor

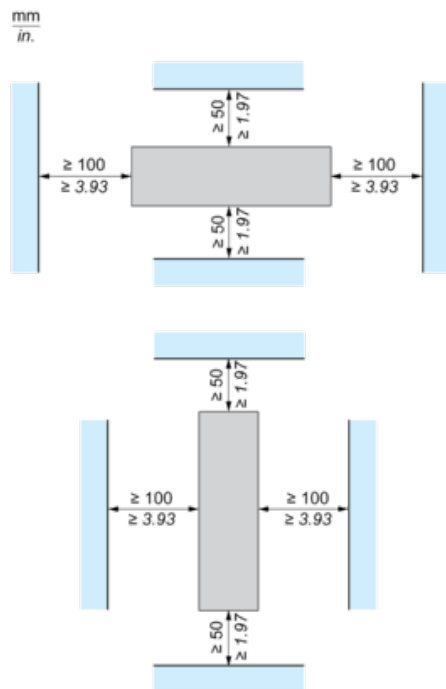

Recommended Schema

1 Braking Resistor




A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC

2 Braking Resistors

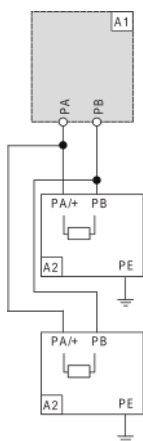

A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC