

LC2D09P7

Reversing Contactor, TeSys Deca, 3P(3NO),
AC-3, <=440V, 9A, 230V AC 50/60Hz coil,
screw clamp terminals





Galvenā

Diapazons	TeSys TeSys Deca
Produkta nosaukums	TeSys D TeSys Deca
Produkta vai sastāvdaļas veids	Reversing contactor
Ierīces īsais nosaukums	LC2D
Contactur application	Resistive load Motor control
Utilisation category	AC-1 AC-3 AC-3e
Ierīces komplektācija	Preassembled with reversing power busbar
Polu skaits	3P
Power pole contact composition	3 NO
[Ue] nominālais darbības spriegums	Strāvas ķēde: ≤ 690 V AC 25...400 Hz Strāvas ķēde: ≤ 300 V DC
[Ie] rated operational current	9 A (at <60 °C) at ≤ 440 V AC AC-3 for strāvas ķēde 25 A (at <60 °C) at ≤ 440 V AC AC-1 for strāvas ķēde
Motor power kW	2,2 KW at 220...230 V AC 50...60 Hz 4 KW at 380...400 V AC 50...60 Hz 4 KW at 415 V AC 50...60 Hz 4 KW at 440 V AC 50...60 Hz 5,5 KW at 500 V AC 50...60 Hz 5,5 kW at 660...690 V AC 50...60 Hz
Motor power HP (UL / CSA)	0,5 Hp at 115 V AC 60 Hz for 1 fāze motors 1 Hp at 230/240 V AC 60 Hz for 1 fāze motors 2 Hp at 200/208 V AC 60 Hz for 3 fāzes motors 2 Hp at 230/240 V AC 60 Hz for 3 fāzes motors 5 Hp at 460/480 V AC 60 Hz for 3 fāzes motors 7,5 hp at 575/600 V AC 60 Hz for 3 fāzes motors
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	230 V AC 50/60 Hz
Papildkontakta veids	1 NO + 1 NC
[Uimp] rated impulse withstand voltage	6 kV IEC 60947
Pārsprieguma kategorija	III
[Ith] conventional free air thermal current	10 A (at 60 °C) for signalling circuit 25 A (at 60 °C) for strāvas ķēde
Irms rated making capacity	250 A at 440 V for strāvas ķēde conforming to IEC 60947 140 A AC for signalling circuit conforming to IEC 60947-5-1 250 A DC for signalling circuit conforming to IEC 60947-5-1
Rated breaking capacity	250 A at 440 V for strāvas ķēde conforming to IEC 60947
[Icw] rated short-time withstand current	30 A 40 °C - 10 min for strāvas ķēde 61 A 40 °C - 1 min for strāvas ķēde 105 A 40 °C - 10 s for strāvas ķēde 210 A 40 °C - 1 s for strāvas ķēde 100 A - 1 s for signalling circuit 120 A - 500 ms for signalling circuit 140 A - 100 ms for signalling circuit
Associated fuse rating	25 A gG at ≤ 690 V coordination type 1 for strāvas ķēde 20 A gG at ≤ 690 V coordination type 2 for strāvas ķēde 10 A gG for signalling circuit conforming to IEC 60947-5-1
Average impedance	2,5 mhm - Ith 25 A 50 Hz for strāvas ķēde

[Ui] rated insulation voltage	Strāvas ķēde 690 V IEC 60947-4-1 Strāvas ķēde 600 V CSA Strāvas ķēde 600 V UL Signalling circuit 690 V IEC 60947-1 Signalling circuit 600 V CSA Signalling circuit 600 V UL
Electrical durability	0,6 M cikli 25 A AC-1 <= 440 V 2 M cikli 9 A AC-3 <= 440 V 2 M cikli 9 A AC-3e <= 440 V
Power dissipation per pole	0,2 W AC-3 1,56 W AC-1 0,2 W AC-3e
Front cover	With
Blokēšanas mehānisma tips	Mechanical
Montāžas stiprinājums	Plāksne Rail
Standards	CSA C22.2 No 14 EN 60947-4-1 EN 60947-5-1 IEC 60947-4-1 IEC 60947-5-1 UL 508 IEC 60335-1
Produkta sertifikācija	DNV[RETURN]CSA[RETURN]CCC[RETURN]UL[RETURN]GL[RE (Lloyds register of shipping) [RETURN]BV[RETURN]RINA[RETURN]GOST[RETURN]UKCA
Connections - terminals	Strāvas ķēde screw clamp terminals 1 1... 4 mm ² elastīgs without cable end Strāvas ķēde screw clamp terminals 2 1... 4 mm ² elastīgs without cable end Strāvas ķēde screw clamp terminals 1 1... 4 mm ² elastīgs with cable end Strāvas ķēde screw clamp terminals 2 1... 2,5 mm ² elastīgs with cable end Strāvas ķēde screw clamp terminals 1 1... 4 mm ² ciets Strāvas ķēde screw clamp terminals 2 1... 4 mm ² ciets Control circuit screw clamp terminals 1 1... 4 mm ² elastīgs without cable end Control circuit screw clamp terminals 2 1... 4 mm ² elastīgs without cable end Control circuit screw clamp terminals 1 1... 4 mm ² elastīgs with cable end Control circuit screw clamp terminals 2 1... 2,5 mm ² elastīgs with cable end Control circuit screw clamp terminals 1 1... 4 mm ² ciets Control circuit screw clamp terminals 2 1... 4 mm ² ciets
Tightening torque	Strāvas ķēde 1,7 N.m screw clamp terminals flat Ø 6 mm Strāvas ķēde 1,7 N.m screw clamp terminals Philips No 2 Control circuit 1,7 N.m screw clamp terminals flat Ø 6 mm Control circuit 1,7 N.m screw clamp terminals Philips No 2 Control circuit 1,7 N.m screw clamp terminals pozidriv No 2 Strāvas ķēde 2,5 N.m screw clamp terminals pozidriv No 2
Operating time	12...22 ms closing 4...19 ms opening
Safety reliability level	B10d = 1369863 cikli contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cikli contactor with mechanical load EN/ISO 13849-1
Mehāniskā izturība	15 M cikli
Maximum operating rate	3600 cikls/h 60 °C

Papildinošs

Coil technology	Without built-in suppressor module
Control circuit voltage limits	0.3...0.6 Uc -40...70 °C drop-out AC 50/60 Hz 0.8...1.1 Uc -40...60 °C operational AC 50 Hz 0.85...1.1 Uc -40...60 °C operational AC 60 Hz 1...1.1 Uc 60...70 °C operational AC 50/60 Hz
Inrush power in VA	70 VA 60 Hz cos phi 0,75 (at 20 °C) 70 VA 50 Hz cos phi 0,75 (at 20 °C)
Hold-in power consumption in VA	7,5 VA 60 Hz cos phi 0,3 (at 20 °C) 7 VA 50 Hz cos phi 0,3 (at 20 °C)
Heat dissipation	2...3 W 50/60 Hz
Auxiliary contacts type	Mechanically linked 1 NO + 1 NC IEC 60947-5-1 Mirror contact 1 NC IEC 60947-4-1
Signalling circuit frequency	25...400 Hz
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non-overlap time	1,5 Ms on de-energisation between NC and NO contact 1,5 ms on energisation between NC and NO contact
Insulation resistance	> 10 MOhm for signalling circuit

Vide

IP degree of protection	IP20 priekšpuse IEC 60529
Climatic withstand	IACS E10 IEC 60947-1 Annex Q category D
Protective treatment	TH IEC 60068-2-30
Piesārņojuma pakāpe	3
Apkārtējā gaisa temperatūra darbībai	-40...60 °C 60...70 °C with derating
Apkārtējā gaisa temperatūra uzglabāšanai	-60...80 °C
Operating altitude	0...3000 m
Fire resistance	850 °C IEC 60695-2-1
Flame retardance	V1 UL 94
Mechanical robustness	Vibrations contactor open2 Gn, 5...300 Hz Vibrations contactor closed4 Gn, 5...300 Hz Shocks contactor open10 Gn for 11 ms Shocks contactor closed15 Gn for 11 ms
Augstums	77 mm
Platums	90 mm
Dziļums	86 mm
Neto svars	0,687 kg

Iepakojšanas vienības

Pirmā iepakojuma vienības tips	PCE
Vienību skaits 1. iepakojumā	1
1. iepakojuma augstums	9,500 cm
1. iepakojuma platums	11,300 cm
1. iepakojuma garums	14,000 cm
1. iepakojuma svars	805,000 g
Otrā iepakojuma vienības tips	S02
Vienību skaits 2. iepakojumā	6
2. iepakojuma augstums	15,000 cm
2. iepakojuma platums	30,000 cm
2. iepakojuma garums	40,000 cm
2. iepakojuma svars	5,118 kg
Trešā iepakojuma vienības tips	P06
Vienību skaits 3. iepakojumā	96
3. iepakojuma augstums	75,000 cm
3. iepakojuma platums	60,000 cm

3. iepakojuma garums	80,000 cm
3. iepakojuma svars	88,000 kg


Piedāvājiēt ilgtspēju

Ilgspējīgs piedāvājuma statuss	Green Premium izstrādājums
REACH regula	REACH Deklarācija
Nesatur REACH SVHC	Jā
ES RoHS direktīva	Atbilstīgs ES RoHS Deklarācija
Nesatur toksiskus smagos metālus	Jā
Nesatur dzīvsudrabu	Jā
Ķīnas RoHS regula	Ķīnas RoHS Deklarācija
Informācija par RoHS izņēmumiem	Jā
Vides informācijas publiskošana	Produkta Ietekme Uz Vidi
Cirkularitātes profils	Informācija Par Eksploatācijas Izbeigšanu
WEEE	Eiropas Savienības tirgū no šī produkta ir jāatbrīvojas, ievērojot noteiktu atkritumu savākšanas kārtību, un produkts nedrīkst nonākt sadzīves atkritumu tvertnēs.
Nesatur PVH	Jā

Līguma garantija

Garantija	18 months
-----------	-----------

Dimensions

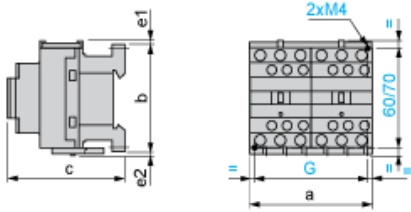

LC2 or 2 x LC1	a	b	c ⁽¹⁾	e1	e2	G
D09 to D18 (AC)	90	77	86	4	1.5	80
D093 to D123 (AC)	90	99	86	–	–	80
D09 to D18 (DC)	90	77	95	4	1.5	80
D093 to D123 (DC)	90	99	95	–	–	80
D25 to D38 (AC)	90	85	92	9	5	80
D183 to D383 (AC)	90	99	92	–	–	80
D25 to D32 (DC)	90	85	101	9	5	80
D183 to D383 (DC)	90	99	101	–	–	80

e1 and e2: including cabling.

(1) With safety cover, without add-on block.

Wiring

