



Galvenā

Produkta sērija	Harmony Control Relays
Relay type	Control relay
Produkta vai sastāvdaļas veids	3-phase control relay
Tīkla fāžu skaits	3 fāzes
Relay name	RM22TG
Relay monitored parameters	Phase sequence Phase failure detection (2 or more phase cut)
Time delay type	Without
Switching capacity in VA	2000 VA
Measurement range	208...480 V voltage AC
Kontaktligzdas tips	2 C/O

Papildinošs

Reset time	1500 ms at maximum voltage
Maximum switching voltage	250 V AC
Minimum switching current	10 mA 5 V DC
Maximum switching current	8 A AC
[Us] rated supply voltage	AC/DC
Supply voltage limits	183...528 V AC
Operating limits	183...528 V AC
Power consumption in VA	15 VA 480 V AC 60 Hz
Voltage detection threshold	< 100 V AC
Supply voltage frequency	50...60 Hz +/- 10 %
Output contacts	2 C/O
Run-up delay at power-up	650 ms
Response time	<= 200 ms
Overvoltage category	III IEC 60664-1 III UL 508
Insulation resistance	> 100 MOhm 500 V DC IEC 60255-27
Montāžas pozīcija	Any position
Connections - terminals	Skrūvju spaiļes, 2 x 0.5...2 x 2.5 mm ² AWG 20...AWG 14) ciets without cable end Skrūvju spaiļes, 2 x 0.2...2 x 1.5 mm ² AWG 24...AWG 16) elastīgs with cable end Skrūvju spaiļes, 1 x 0.5...1 x 3.3 mm ² AWG 20...AWG 12) ciets without cable end Skrūvju spaiļes, 1 x 0.2...1 x 2.5 mm ² AWG 24...AWG 14) elastīgs with cable end
Tightening torque	0,6...1 N.m IEC 60947-1
Korpusa materiāls	Self-extinguishing plastic
Statusa gaismas diode	LED (dzeltens) relay ON LED (zaļš) barošana IESLĒGTA
Montāžas stiprinājums	35 mm DIN sliede atbilst IEC 60715
Elektriskā izturība	100000 cikli
Mehāniskā izturība	10000000 cikli
Utilisation category	AC-15 IEC 60947-5-1 DC-13 IEC 60947-5-1 AC-1 IEC 60947-4-1 DC-1 IEC 60947-4-1
[Un] rated nominal voltage	, self-powered

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Safety reliability data	MTTFd = 924.6 years B10d = 850000
Kontaktligzdas materiāls	Cadmium free
Vadības veids	With test button
Platums	22,5 mm
Neto svars	0,09 kg

Vide

Immunity to microbreaks	10 ms
Electromagnetic compatibility	Immunity for residential, commercial and light-industrial environments conforming to IEC 61000-6-1 Immunity for industrial environments conforming to IEC 61000-6-2 Emission standard for residential, commercial and light-industrial environments conforming to IEC 61000-6-3 Emission standard for industrial environments conforming to IEC 61000-6-4 Electrostatic discharge - test level: 6 kV level 3 (contact discharge) conforming to IEC 61000-4-2 Electrostatic discharge - test level: 8 kV level 3 (air discharge) conforming to IEC 61000-4-2 Radiated radio-frequency electromagnetic field immunity test - test level: 10 V/m level 3 conforming to IEC 61000-4-3 Electrical fast transient/burst immunity test - test level: 4 kV level 4 (direct) conforming to IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 2 kV level 4 (capacitive coupling) conforming to IEC 61000-4-4 Surge immunity test - test level: 4 kV level 4 (common mode) conforming to IEC 61000-4-5 Surge immunity test - test level: 2 kV level 4 (differential mode) conforming to IEC 61000-4-5 Conducted and radiated emissions class B group 1 conforming to CISPR 11 Conducted and radiated emissions class B conforming to CISPR 22
Standarti	IEC 60255-1
Produkta sertifikācija	CE[RETURN]EAC[RETURN]RCM[RETURN]GL[RETURN]CSA[RETURN]JUL[RETURN]CCC
Apkārtējā gaisa temperatūra uzglabāšanai	-40...70 °C
Ambient air temperature for operation	-20...50 °C 60 Hz -20...60 °C 50 Hz AC/DC
Relative humidity	93...97 % 25...55 °C IEC 60068-2-30
Vibration resistance	0.075 mm 10...58,1 Hz) not in operation IEC 60068-2-6 1 gn 10...58,1 Hz) not in operation IEC 60068-2-6 0.035 mm 58,1...150 Hz) in operation IEC 60068-2-6 0.5 gn 58,1...150 Hz) in operation IEC 60068-2-6
Shock resistance	15 gn 11 ms) not in operation IEC 60068-2-27 5 gn 11 ms) in operation IEC 60068-2-27
IP degree of protection	IP20 IEC 60529 terminals) IP40 IEC 60529 housing) IP50 IEC 60529 front panel)
Pollution degree	3 IEC 60664-1 3 UL 508
Dielectric test voltage	2,5 kV AC 50 Hz, 1 min IEC 60255-27

Iepakojšanas vienības

Pirmā iepakojuma vienības tips	PCE
Vienību skaits 1. iepakojumā	1
1. iepakojuma augstums	2,500 cm
1. iepakojuma platums	8,200 cm
1. iepakojuma garums	9,500 cm
1. iepakojuma svars	103,000 g
Otrā iepakojuma vienības tips	CAR
Vienību skaits 2. iepakojumā	40
2. iepakojuma augstums	14,400 cm
2. iepakojuma platums	39,600 cm
2. iepakojuma garums	29,600 cm
2. iepakojuma svars	4,630 kg
Trešā iepakojuma vienības tips	P06

Vienību skaits 3. iepakojumā	640
3. iepakojuma augstums	50,000 cm
3. iepakojuma platums	60,000 cm
3. iepakojuma garums	80,000 cm
3. iepakojuma svars	86,180 kg

Piedāvājiēt ilgtspēju

Ilgspējīgs piedāvājuma statuss	Green Premium izstrādājums
REACH regula	REACH Deklarācija
ES RoHS direktīva	Proaktīva atbilstība (uz izstrādājumu neattiecas ES RoHS juridiskās saistības)
Nesatur dzīvsudrabu	Jā
Ķīnas RoHS regula	Ķīnas RoHS Deklarācija
Informācija par RoHS izņēmumiem	Jā
Vides informācijas publicēšana	Produkta Ietekme Uz Vidi
Cirkularitātes profils	Informācija Par Ekspluatācijas Izbeigšanu

Dimensions



Mounting and Clearance

Rail Mounting

mm
in.



3-Phase Control Relay

Wiring Diagram




L1,L2,L3 : Supply to be monitored

11-14,12 : 1st C/O contact of output relay

21-24,22 : 2nd C/O contact of output relay

Function Diagram

Phase Sequence Control and Total Loss of Phase Detection

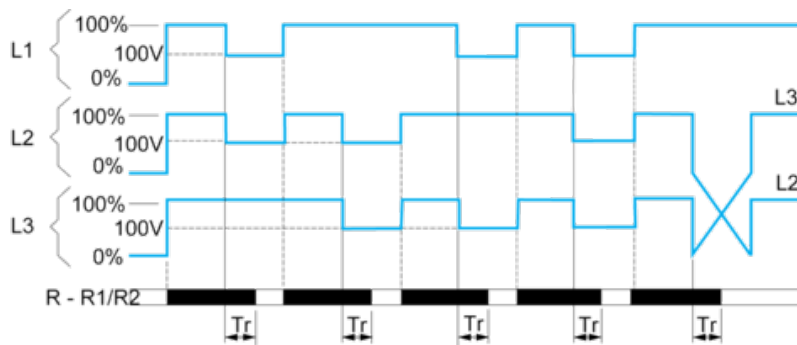

Legend

- Tr Response time on appearance of a fault
- L1, L2, L3 Phases of the supply voltage monitored
- R - R1/R2 Output relay(s),
- Relay status: black color = energized.