


# LC2K0901P7

reversing Contactor, TeSys K, 3P, AC-3/  
AC-3e,440V 9A, 1NC, 230V AC coil, screw  
clamp terminals



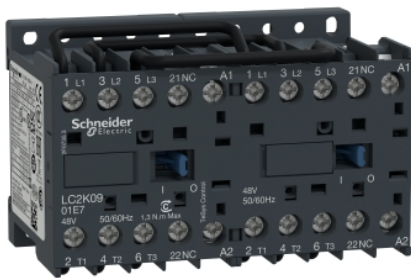

## Galvenā

Diapazons	TeSys
Produkta nosaukums	TeSys K
Produkta vai sastāvdaļas veids	Reversing contactor
Ierīces īsais nosaukums	LC2K
Ierīces pielietojums	Kontrolē
Contactor application	Resistive load Motor control
Utilisation category	AC-3 AC-3e AC-4 AC-1
Ierīces komplektācija	Preassembled with reversing power busbar
Polu skaits	3P
Power pole contact composition	3 NO
[Ue] nominālais darbības spriegums	Strāvas ķēde: 690 V AC 50/60 Hz Signalling circuit: ≤ 690 V AC 50/60 Hz
[Ie] rated operational current	9 A (at <60 °C) at ≤ 440 V AC AC-3 for strāvas ķēde 9 A (at <60 °C) at ≤ 440 V AC AC-3e for strāvas ķēde 20 A (at <60 °C) at ≤ 690 V AC AC-1 for strāvas ķēde
Motor power kW	2,2 KW 220...230 V AC 50/60 Hz 4 KW 380...415 V AC 50/60 Hz 4 kW 440/690 V AC 50/60 Hz
Control circuit type	AC 50/60 Hz
[Uc] control circuit voltage	230 V AC 50/60 Hz
Papildkontakta veids	1 NC
[Uimp] rated impulse withstand voltage	8 kV
Pārsprieguma kategorija	III
[Ith] conventional free air thermal current	20 A (at 60 °C) for strāvas ķēde 10 A (at 50 °C) for signalling circuit
Irms rated making capacity	110 A AC for strāvas ķēde conforming to IEC 60947 110 A AC for signalling circuit conforming to IEC 60947
Rated breaking capacity	110 A at 220...230 V conforming to IEC 60947 110 A at 380...400 V conforming to IEC 60947 110 A at 415 V conforming to IEC 60947 110 A at 440 V conforming to IEC 60947 80 A at 500 V conforming to IEC 60947 70 A at 660...690 V conforming to IEC 60947
[Icw] rated short-time withstand current	90 A 50 °C - 1 s for strāvas ķēde 85 A 50 °C - 5 s for strāvas ķēde 80 A 50 °C - 10 s for strāvas ķēde 60 A 50 °C - 30 s for strāvas ķēde 45 A 50 °C - 1 min for strāvas ķēde 40 A 50 °C - 3 min for strāvas ķēde 20 A 50 °C - ≥ 15 min for strāvas ķēde 80 A - 1 s for signalling circuit 90 A - 500 ms for signalling circuit 110 A - 100 ms for signalling circuit
Associated fuse rating	25 A gG at ≤ 440 V for strāvas ķēde 25 A aM for strāvas ķēde 10 A gG for signalling circuit conforming to IEC 60947 10 A gG for signalling circuit conforming to VDE 0660
Average impedance	3 mhm - Ith 20 A 50 Hz for strāvas ķēde

[Ui] rated insulation voltage	Strāvas ķēde 600 V UL 508 Strāvas ķēde 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-4-1 Signalling circuit 690 V IEC 60947-5-1 Signalling circuit 600 V UL 508 Strāvas ķēde 600 V CSA C22.2 No 14 Signalling circuit 600 V CSA C22.2 No 14
Electrical durability	1,3 M cikli 9 A AC-3 <= 440 V 1,3 M cikli 9 A AC-3e <= 440 V 0,16 M cikli 20 A AC-1 <= 690 V 0,02 M cikli 54 A AC-4 <= 440 V
Bloķēšanas mehānisma tips	Mechanical
Montāžas stiprinājums	Plāksne Rail
Standarti	EN/IEC 60947-4-1 GB/T 14048.4 UL 60947-4-1 CSA C22.2 No 60947-4-1 JIS C8201-4-1
Produkta sertifikācija	CB Scheme[RETURN]CCC[RETURN]UL[RETURN]CSA[RETURN]EA
Connections - terminals	Screw clamp terminals 1 1,5...4 mm <sup>2</sup> ciets Screw clamp terminals 1 0,75...4 mm <sup>2</sup> elastīgs without cable end Screw clamp terminals 1 0,34...2,5 mm <sup>2</sup> elastīgs with cable end Screw clamp terminals 2 1,5...4 mm <sup>2</sup> ciets Screw clamp terminals 2 0,75...4 mm <sup>2</sup> elastīgs without cable end Screw clamp terminals 2 0,34...1,5 mm <sup>2</sup> elastīgs with cable end
Tightening torque	0,8...1,3 N.M screw clamp terminals Philips No 2 0,8...1,3 N.M screw clamp terminals flat Ø 6 mm 0,8...1,3 N.m screw clamp terminals pozidriv No 2
Operating time	10...20 ms coil energisation and NO closing 10...20 ms coil de-energisation and NO opening
Safety reliability level	B10d = 1369863 cikli contactor with nominal load EN/ISO 13849-1 B10d = 20000000 cikli contactor with mechanical load EN/ISO 13849-1
Mehāniskā izturība	5 M cikli
Maximum operating rate	3600 cikls/h

## Papildinošs

Control circuit voltage limits	Operational: 0.8...1.15 U <sub>c</sub> (at <50 °C) Drop-out: 0.2...0.75 U <sub>c</sub> (at <50 °C)
Inrush power in VA	30 VA (at 20 °C)
Hold-in power consumption in VA	4,5 VA (at 20 °C)
Heat dissipation	1,3 W
Auxiliary contacts type	Instantaneous 1 NC
Signalling circuit frequency	<= 400 Hz
Minimum switching current	5 mA for signalling circuit
Minimum switching voltage	17 V for signalling circuit
Non overlap distance	0,5 mm
Insulation resistance	> 10 MOhm for signalling circuit

## Vide

IP degree of protection	IP20 VDE 0106
Protective treatment	TC IEC 60068 TC DIN 50016
Apkārteja gaisa temperatūra darbībai	-25...50 °C
Apkārteja gaisa temperatūra uzglabāšanai	-50...80 °C
Operating altitude	2000 m without derating

Flame retardance	V1 UL 94 Requirement 2 NF F 16-101 Requirement 2 NF F 16-102
Mechanical robustness	Shocks contactor closed, on X axis10 Gn for 11 ms IEC 60068-2-27 Shocks contactor closed, on Y axis15 Gn for 11 ms IEC 60068-2-27 Shocks contactor closed, on Z axis15 Gn for 11 ms IEC 60068-2-27 Shocks contactor opened, on X axis6 Gn for 11 ms IEC 60068-2-27 Shocks contactor opened, on Y axis10 Gn for 11 ms IEC 60068-2-27 Shocks contactor opened, on Z axis10 Gn for 11 ms IEC 60068-2-27 Vibrations contactor closed4 Gn, 5...300 Hz IEC 60068-2-6 Vibrations contactor opened2 Gn, 5...300 Hz IEC 60068-2-6
Augstums	58 mm
Platums	90 mm
Dziļums	57 mm
Neto svars	0,39 kg

### Iepakojšanas vienības

Pirmā iepakojuma vienības tips	PCE
Vienību skaits 1. iepakojumā	1
1. iepakojuma augstums	6,5 cm
1. iepakojuma platums	9,2 cm
1. iepakojuma garums	6,0 cm
1. iepakojuma svars	365,0 g
Otrā iepakojuma vienības tips	S02
Vienību skaits 2. iepakojumā	25
2. iepakojuma augstums	15,0 cm
2. iepakojuma platums	30,0 cm
2. iepakojuma garums	40,0 cm
2. iepakojuma svars	9,464 kg

### Piedāvājiēt ilgtspēju

Ilgtspējīgs piedāvājuma statuss	Green Premium izstrādājums
REACH regula	<a href="#">REACH Deklarācija</a>
Nesatur REACH SVHC	Jā
ES RoHS direktīva	Atbilstīgs <a href="#">ES RoHS Deklarācija</a>
Nesatur toksiskus smagos metālus	Jā
Nesatur dzīvsudrabu	Jā
Ķīnas RoHS regula	<a href="#">Ķīnas RoHS Deklarācija</a>
Informācija par RoHS izņēmumiem	<a href="#">Jā</a>
Vides informācijas publicēšana	<a href="#">Produkta Ietekme Uz Vidi</a>
Cirkularitātes profils	<a href="#">Informācija Par Eksploatācijas Izbeigšanu</a>
WEEE	Eiropas Savienības tirgū no šī produkta ir jāatbrīvojas, ievērojot noteiktu atkritumu savākšanas kārtību, un produkts nedrīkst nonākt sadzīves atkritumu tvertnēs.

### Līguma garantija

Garantija	18 months
-----------	-----------