

Galvenā

Saderība ar	Altivar Process ATV900 Altivar Machine ATV340 Altivar Machine ATV320 Easy Altivar 310 Easy Altivar 310L
Produkta vai sastāvdaļas veids	Braking resistor
Vērtība (Ω)	100 Ohm

Product compatibility	<p>Variable speed drive ATV930 wall mount 0,75 kW 380...480 V light cycle</p> <p>Variable speed drive ATV930 wall mount 1,5 kW 380...480 V light cycle</p> <p>Variable speed drive ATV930 wall mount 2,2 kW 380...480 V light cycle</p> <p>Variable speed drive ATV930 wall mount 3 kW 380...480 V light cycle</p> <p>Variable speed drive ATV930 wall mount 4 kW 380...480 V light cycle</p> <p>Variable speed drive ATV930 wall mount 0,75 kW 200...240 V light cycle</p> <p>Variable speed drive ATV950 wall mount 0,75 kW 380...480 V light cycle</p> <p>Variable speed drive ATV950 wall mount 1,5 kW 380...480 V light cycle</p> <p>Variable speed drive ATV950 wall mount 2,2 kW 380...480 V light cycle</p> <p>Variable speed drive ATV950 wall mount 3 kW 380...480 V light cycle</p> <p>Variable speed drive ATV950 wall mount 4 kW 380...480 V light cycle</p> <p>Variable speed drive ATV930 wall mount 0,75 kW 380...480 V medium cycle</p> <p>Variable speed drive ATV930 wall mount 1,5 kW 380...480 V medium cycle</p> <p>Variable speed drive ATV930 wall mount 0,75 kW 200...240 V medium cycle</p> <p>Variable speed drive ATV950 wall mount 0,75 kW 380...480 V medium cycle</p> <p>Variable speed drive ATV950 wall mount 1,5 kW 380...480 V medium cycle</p> <p>Variable speed drive ATV340 0,75 kW 380...480 V light cycle</p> <p>Variable speed drive ATV340 1,5 kW 380...480 V light cycle</p> <p>Variable speed drive ATV340 2,2 kW 380...480 V light cycle</p> <p>Variable speed drive ATV340 3 kW 380...480 V light cycle</p> <p>Variable speed drive ATV340 0,75 kW 380...480 V medium cycle</p> <p>Variable speed drive ATV320 0,18 kW 200...240 V</p> <p>Variable speed drive ATV320 0,37 kW 200...240 V</p> <p>Variable speed drive ATV320 0,37 kW 380...480 V</p> <p>Variable speed drive ATV320 0,55 kW 380...480 V</p> <p>Variable speed drive ATV320 0,75 kW 380...480 V</p> <p>Variable speed drive ATV320 1,1 kW 380...480 V</p> <p>Variable speed drive ATV320 1,5 kW 380...480 V</p> <p>Variable speed drive ATV320 2,2 kW 380...480 V</p> <p>Variable speed drive ATV320 3 kW 380...480 V</p> <p>Variable speed drive ATV310 1,5 kW</p> <p>Variable speed drive ATV310 2,2 kW</p> <p>Variable speed drive ATV310 3 kW</p> <p>Variable speed drive ATV310 4 kW</p> <p>Variable speed drive ATV930 2,2 kW 500...690 V light cycle</p> <p>Variable speed drive ATV930 3 kW 500...690 V light cycle</p> <p>Variable speed drive ATV930 4 kW 500...690 V light cycle</p> <p>Variable speed drive ATV930 5,5 kW 500...690 V light cycle</p> <p>Variable speed drive ATV930 3 hp 600 V light cycle</p> <p>Variable speed drive ATV930 5 hp 600 V light cycle</p> <p>Variable speed drive ATV930 7,5 hp 600 V light cycle</p> <p>Variable speed drive ATV930 2,2 kW 500...690 V medium cycle</p> <p>Variable speed drive ATV930 3 kW 500...690 V medium cycle</p> <p>Variable speed drive ATV930 3 hp 600 V medium cycle</p> <p>Variable speed drive ATV320 0,75 kW 525...600 V</p> <p>Variable speed drive ATV320 1,5 kW 525...600 V</p> <p>Variable speed drive ATV320 2,2 kW 525...600 V</p> <p>Variable speed drive ATV320 4 kW 525...600 V</p> <p>Variable speed drive ATV310L 0,75 kW</p> <p>Variable speed drive ATV310L 1,5 kW</p> <p>Variable speed drive ATV310L 2,2 kW</p> <p>Variable speed drive ATV310L 3,0 kW</p> <p>Variable speed drive ATV310L 4,0 kW</p> <p>Variable speed drive ATV310L 5,5 kW</p>
Duty cycle	<p>Light cycle (heavy duty) <0,8 s braking with 150 % braking torque for a 40 s cycle</p> <p>Light cycle (normal duty) <0,8 s braking with 120 % braking torque for a 40 s cycle</p> <p>Medium cycle (normal duty) <4 s braking with 135 % braking torque for a 40 s cycle</p> <p>Medium cycle (heavy duty) <4 s braking with 165 % braking torque for a 40 s cycle</p>
Average power available	0,1 kW 50 °C
Electrical connection	Terminal <= 10 mm ² / AWG 8 drive
Protection type	Thermal protection via drive
Platums	105 mm
Augstums	295 mm
Dziļums	100 mm
Neto svars	1,5 kg

Vide

IP aizsardzības pakāpe	IP20
Apkārtējā gaisa temperatūra uzglabāšanai	-25...70 °C
Apkārtējā gaisa temperatūra darbībai	0...50 °C

Iepakojšanas vienības


Pirmā iepakojuma vienības tips	PCE
Vienību skaits 1. iepakojumā	1
1. iepakojuma augstums	31,2 cm
1. iepakojuma platums	16,7 cm
1. iepakojuma garums	12 cm
1. iepakojuma svars	1,7 kg
Otrā iepakojuma vienības tips	S04
Vienību skaits 2. iepakojumā	6
2. iepakojuma augstums	30 cm
2. iepakojuma platums	40 cm
2. iepakojuma garums	60 cm
2. iepakojuma svars	10,966 kg

Piedāvājiem ilgtspēju

REACH regula	REACH Deklarācija
Nesatur REACH SVHC	Jā
ES RoHS direktīva	Proaktīva atbilstība (uz izstrādājumu neattiecas ES RoHS juridiskās saistības) ES RoHS deklarācija
Nesatur toksiskus smagos metālus	Jā
Nesatur dzīvsudrabu	Jā
Ķīnas RoHS regula	Ķīnas RoHS Deklarācija
Informācija par RoHS izņēmumiem	Jā

Dimensions

Right Side and Front View

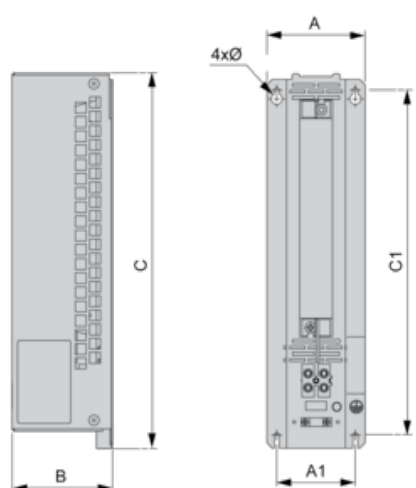

Dimensions in mm

A	B	C	A1	C1	Ø
105	100	295	72	266	4.5


Dimensions in in.

A	B	C	A1	C1	Ø
4.13	3.94	11.61	2.83	10.47	0.18

Mounting and Clearance




(1) Braking resistor

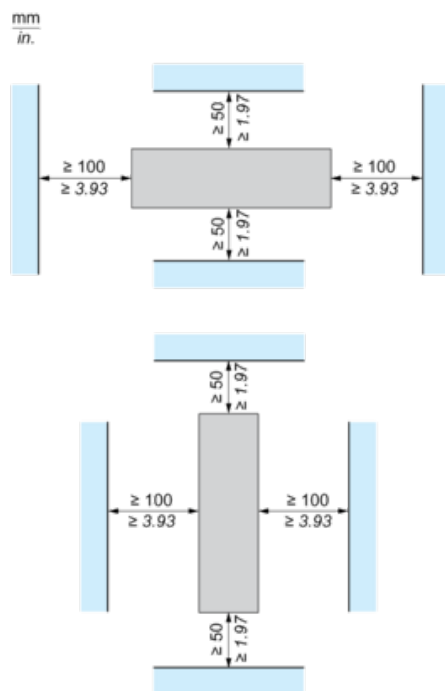

Recommended Schema

1 Braking Resistor




A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC

2 Braking Resistors

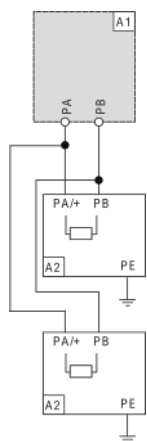

A1 : Drive or external braking unit

A2 : Braking resistor

PA, PB : Bus DC