


EFI-P2 A 40/0.03

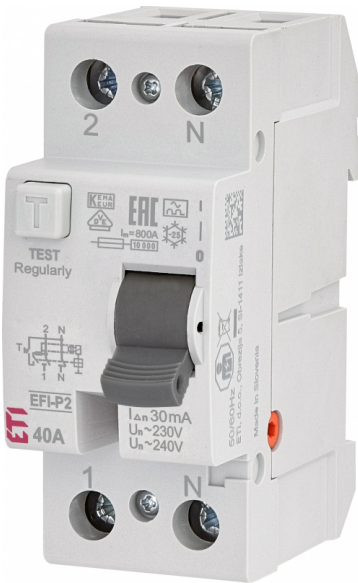

Specifications

ETI Code	002061112
Description	EFI-P2 A 40/0.03
Class name	RCCB
Rated current (A)	40
Type	A
Current type	A
Rated voltage (V)	240
Depth (mm)	68
No. Of poles	1+N
IP rating	IP20
Mounting	DIN rail
Rated Frequency (Hz)	50/60
Standards	IEC/EN 61008
Terminals (mm2)	1-25
Rated residual operating current IΔn (A)	0.03
Tripping time	Instantaneous
Rated conditional short-circuit current Inc (kA)	10

[Online product page](#)

Other documentation





- Technical data catalogue
- Certificate
- 3D Model
- Instruction manual
- CE declaration
- Eplan file

ETIM international clasification

Classification	EC000003
Class name	Residual current circuit breaker (RCCB)
Type of drive	50/60
Degree of protection (IP), front side	IP20
Number of knife blade fuse holders	1+N
Number of poles	2
Rated voltage	230/240V
Rated current	40A
Rated fault current	0,03mA
Mounting method	DIN rail
Leakage current type	A
Selective protection	
Short-time delayed tripping	
Short-circuit breaking capacity (Icw)	10kA
Surge current capacity	0,4kA
Additional equipment possible	1
Degree of protection (IP)	IP20
Width in number of modular spacings	2
Built-in depth	68mm
Connectable conductor cross section multi-wired	1-25mm ²

Dimension drawing

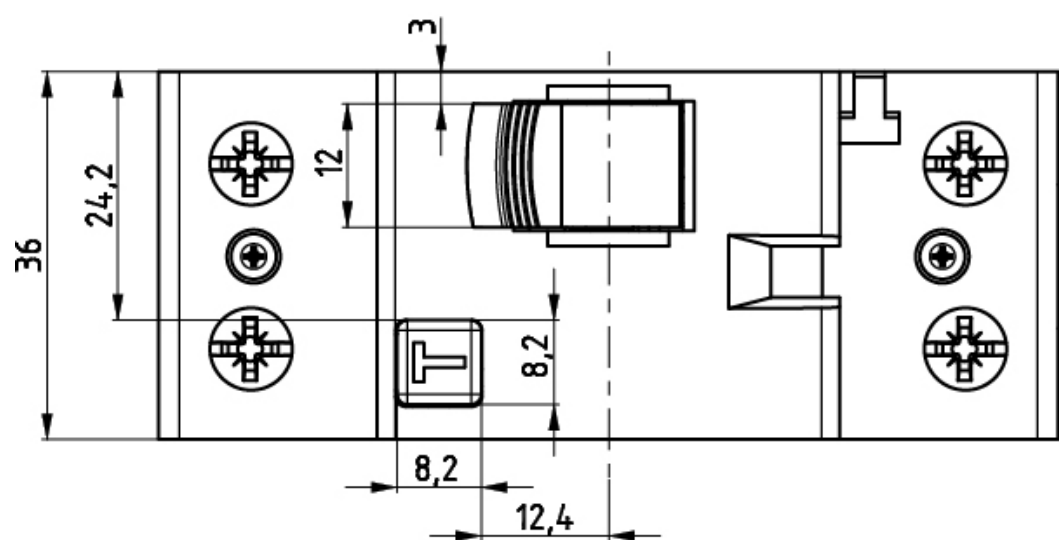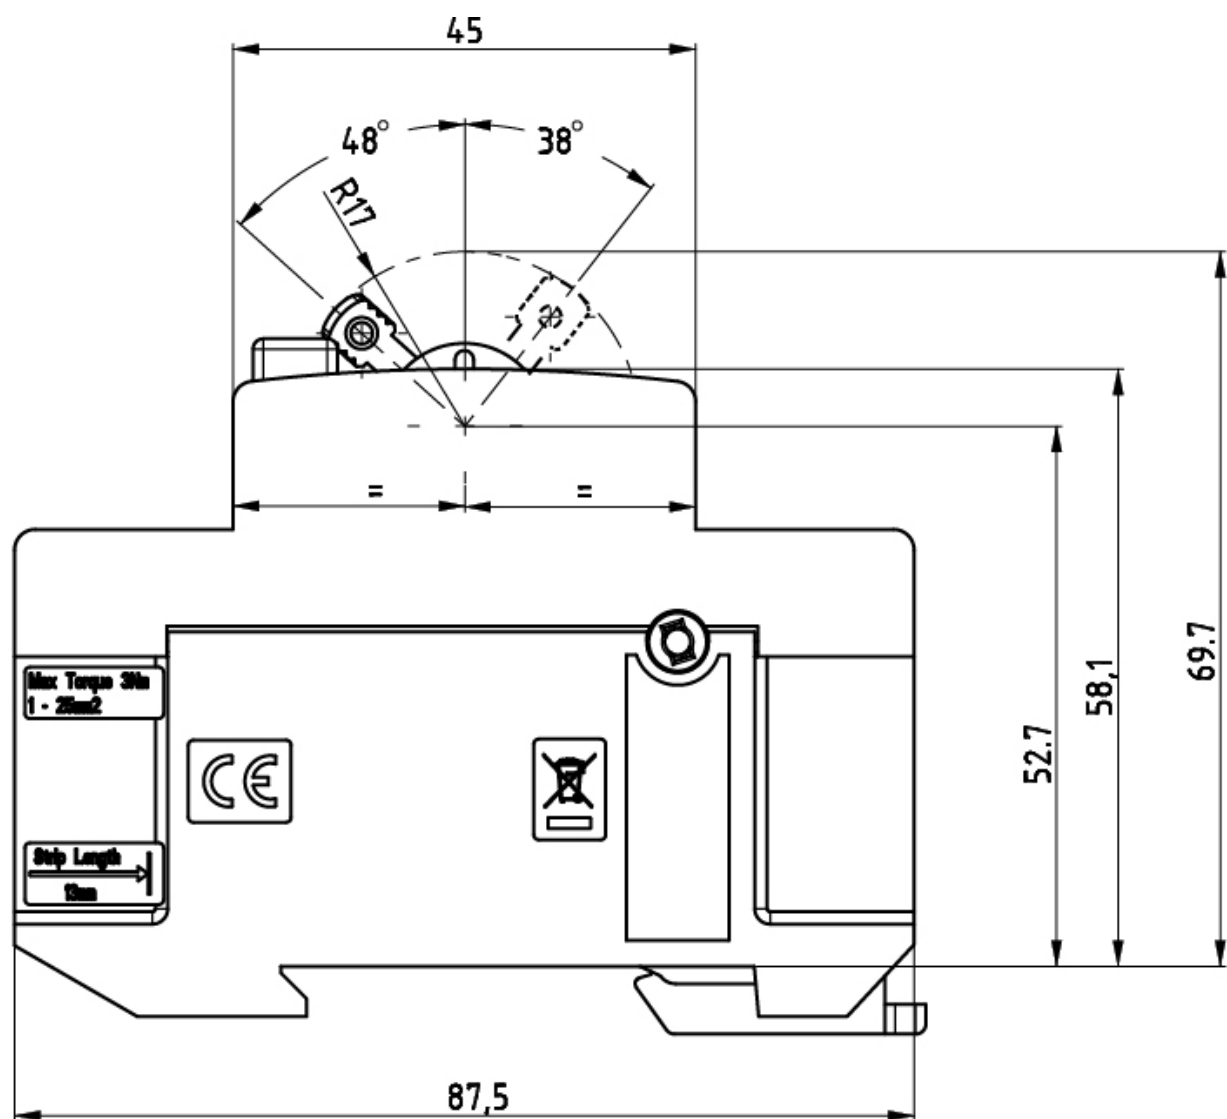

Wiring diagram

