

**PHILIPS****Lighting**

# Ledinaire Waterproof WT065C

## WT065C G2 LED98S/840 PSU L1500

Ledinaire Waterproof WT065C, 60 W, L1500 mm, 9800 lm, 4000 K, Symmetrical, Clear, IP65, IK08, TW1-ready

The Ledinaire Waterproof range provides maximum performance and durability at great value. As an off-the-shelf LED luminaire solution for all your everyday needs, it can be deployed in a wide variety of locations.

### Product data

#### General Information

Light source replaceable	Yes
Number of gear units	1 unit
Driver included	Yes
Feed-through wiring	Simple Connection and removable cover available for feed-through wiring 1-phase (internal wiring is not included)
Service tag	No
Lighting Technology	LED
Value ladder	Value

#### Light Technical

Luminous Flux	9,800 lm
Luminous Efficacy (rated) (Nom)	163 lm/W
Saturated Red (R9)	<50
Correlated Color Temperature (Nom)	4000 K
Color rendering index (CRI)	>80

#### Flickering value (PstLM) - Flickering value as 1 per EN 61000-3-3

Stroboscopic effect visibility measure (SVM)	0.4
Beam angle of light source	110 degree(s)
Light source color	840 neutral white
Optic type	Symmetrical
Luminaire light beam spread	110°
Unified glare rating CEN	30


#### Operating and Electrical

Input Voltage	220 to 240 V
Line Frequency	50 or 60 Hz
Inrush current	17.2 A
Inrush time	0.172 ms
Power Consumption	60 W
Power Factor (Fraction)	0.9
Connection	Push-in connector 3-pole
Cable	-

# Ledinaire Waterproof WT065C

Number of products on MCB of 16 A type B	31	Photobiological risk	Photobiological risk group 0 @200mm to EN62778
<b>Temperature</b>			
Ambient temperature range	-20 to +40 °C	Photobiological risk specification	0.2 m
<b>Controls and Dimming</b>			
Dimmable	No	EU RoHS compliant	Yes
Driver/power unit/transformer	Power supply unit (On/Off)	<b>Initial Performance (IEC Compliant)</b>	
Control interface	-	Luminous flux tolerance	+/-10%
Constant light output	No	Initial chromaticity	(0.38,0.38) SDCM≤5
<b>Mechanical and Housing</b>			
Housing Material	Polycarbonate	Power consumption tolerance	+/-10%
Reflector material	Steel	<b>Over Time Performance (IEC Compliant)</b>	
Optic material	Polycarbonate	Control gear failure rate at median useful life	0.075 %
Optical cover material	Polycarbonate	50000 h	
Fixation material	Stainless steel	Lumen maintenance at median useful life*	L75
Housing Color	Gray	50000 h	
Optical cover finish	Clear	Lumen maintenance at median useful life*	L70
Overall length	1,507 mm	75000 h	
Overall width	90 mm	<b>Application Conditions</b>	
Overall height	78 mm	Performance ambient temperature Tq	25 °C
Dimensions (Height x Width x Depth)	78 x 90 x 1507 mm	Maximum dim level	Not applicable
<b>Approval and Application</b>			
Ingress protection code	IP65 [Dust penetration-protected, jet-proof]	Suitable for random switching	No
Mech. impact protection code	IK08 [5 J vandal-protected]	<b>Product Data</b>	
Sustainability rating	-	Order product name	WT065C G2 LED98S/840 PSU L1500
Protection class IEC	Safety class I	Full product name	WT065C G2 LED98S/840 PSU L1500
Glow-wire test	Temperature 850 °C, duration 30 s	Full product code	87195149581809
Flammability mark	For mounting on easily flammable surfaces	Order code	911401874084
CE mark	CE mark	Material Nr. (12NC)	911401874084
ENEC mark	-	Numerator - Quantity Per Pack	1
Warranty period	3 years	Net Weight (Piece)	1.600 kg
		EAN/UPC - Product/Case	8719514958180
		Numerator - Packs per outer box	8
		EAN/UPC - Case	8719514958203

## Dimensional drawing

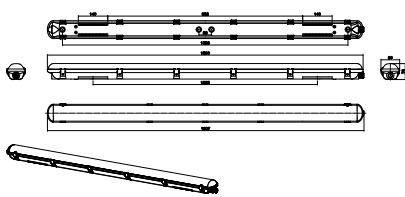

WT065C G2 LED98S/840 PSU L1500  
WT065C G2 LED98S/840 PSU L1500 PCC

## Ledinaire Waterproof WT065C



© 2024 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

[www.lighting.philips.com](http://www.lighting.philips.com)  
2024, June 12 - data subject to change