

CH22x58 gG 25A/690V



Specifications

ETI Code	002651044
Description	CH22x58 gG 25A/690V
Class name	Fuse link
Rated current (A)	25
Type	CH
Size	22x58
Characteristics	gG
Rated AC voltage (V)	690
Breaking capacity AC (kA)	120
Power dissipation (W)	3,5
Standards	IEC 60269-1, IEC 60269-2
Application	For cable protection

Online product page [🔗](#)

Other documentation



Technical data catalogue

3D Model

Instruction manual

CE declaration


Eplan file

ETIM international clasification


Classification	EC002704
Class name	Cylindrical fuse
Rated current	25
Max. rated operation voltage Ue AC	690
Construction size	CH22
Application	For cable protection
Size	22x58 mm
Rated voltage	690V
Voltage type	AC
Utilization category	Other
Rated operating frequency	50Hz
Nominal current	25A
With striker	
Breaking capacity	120kA

Melting energy characteristics


Melting energy
characteristics I^2t
CH22

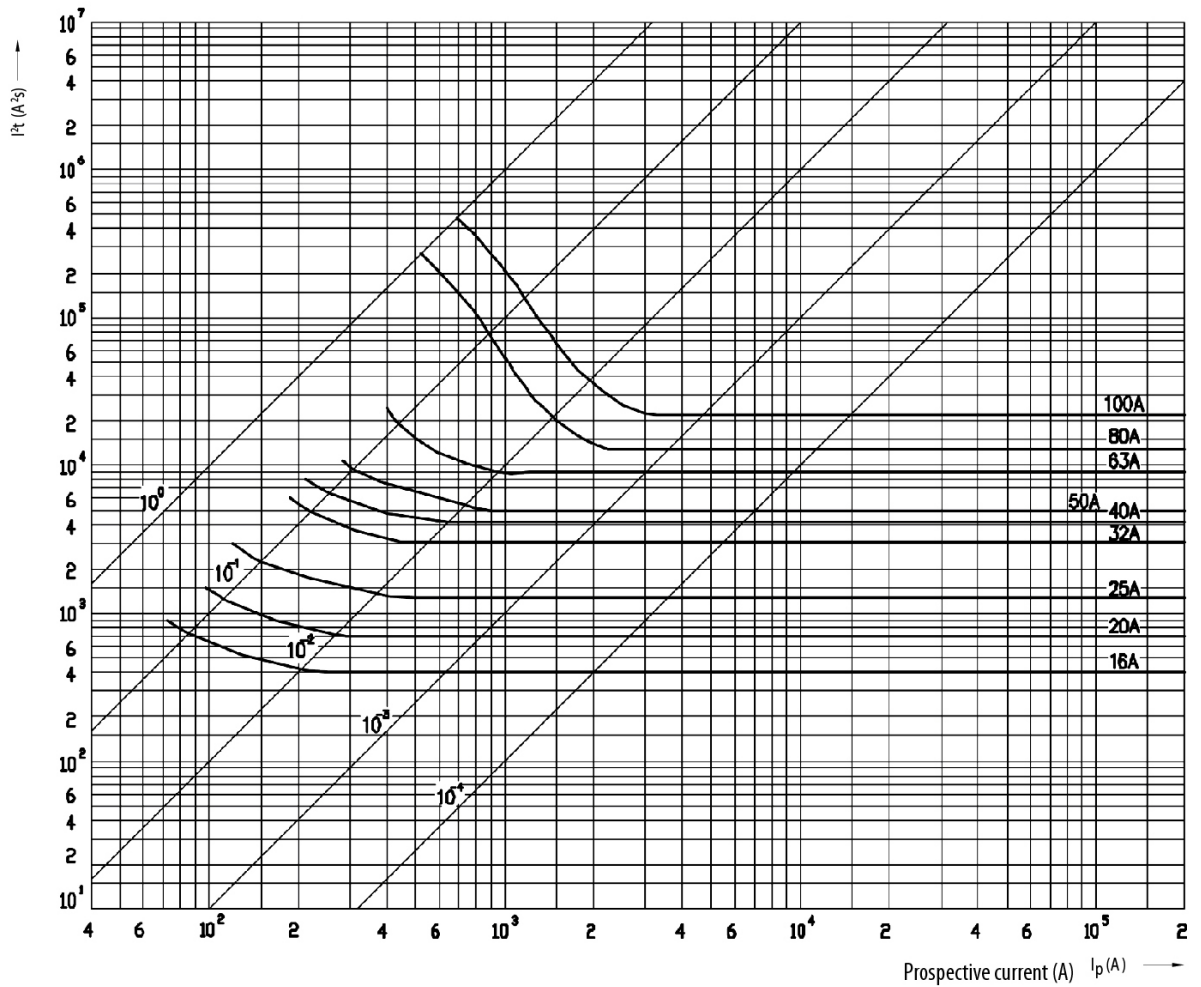

Characteristics

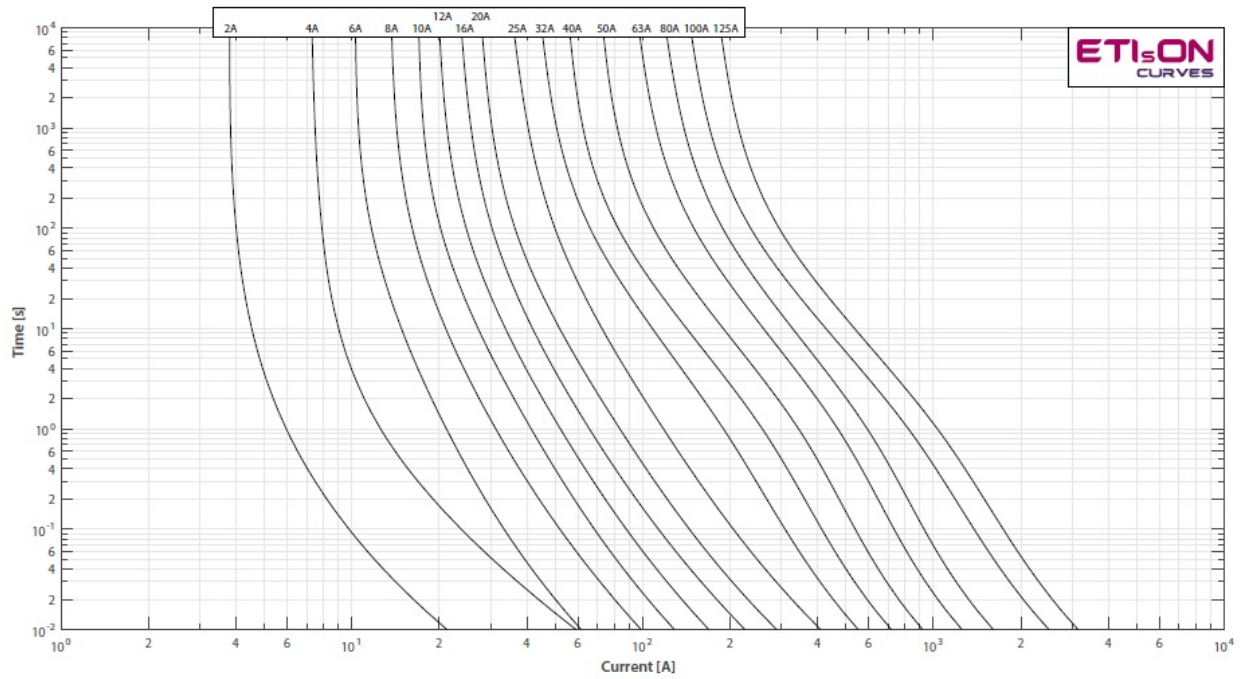

Dimension drawing

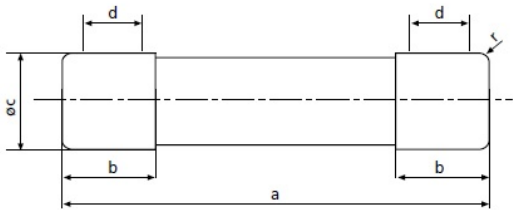

size	a	b _{max.}	c	d _{min.}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1

Cut-off current characteristics

Cut-off current characteristics, CH22 gG

