


CH10x38 gG 25A/500V

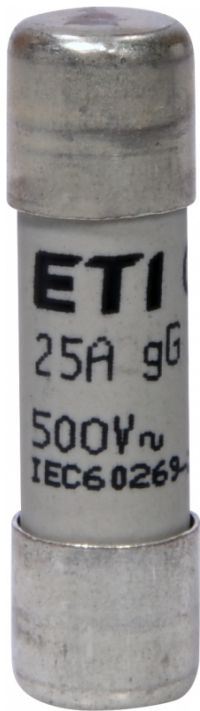

Specifications

ETI Code	002651021
Description	CH10x38 gG 25A/500V
Class name	Fuse link
Rated current (A)	25
Type	CH
Size	10x38
Characteristics	gG
Rated AC voltage (V)	500
Breaking capacity AC (kA)	120
Power dissipation (W)	2,7
Standards	IEC 60269-1, IEC 60269-2
Application	For cable protection

[Online product page](#) 


Other documentation

[Technical data catalogue](#)
[3D Model](#)
[Instruction manual](#)
[CE declaration](#)
[Eplan file](#)


ETIM international clasification

Classification	EC000035
Class name	Miniature fuse
Voltage type	AC
Rated current	25A
Rated voltage	500V


Melting energy characteristics

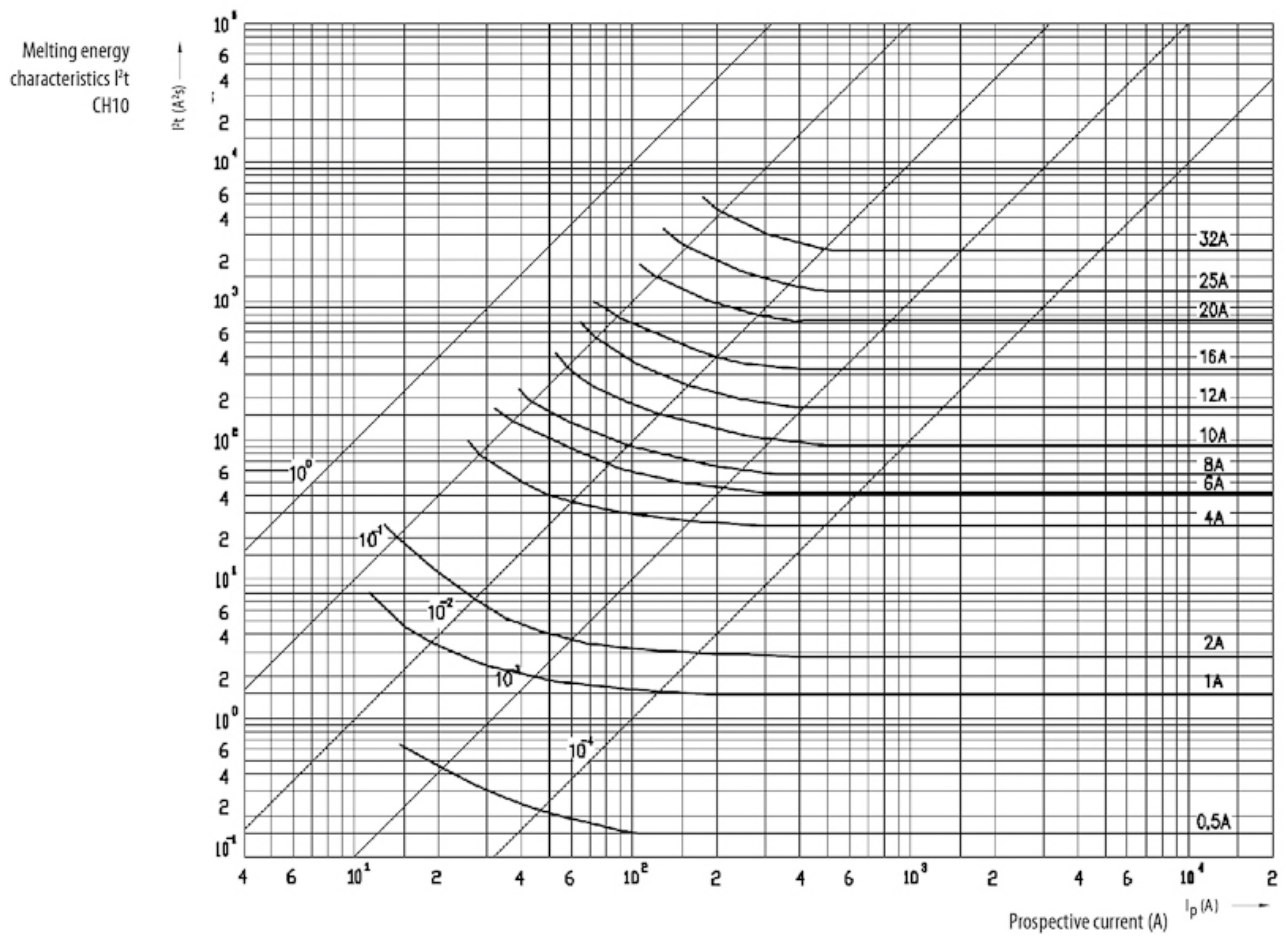

Characteristics

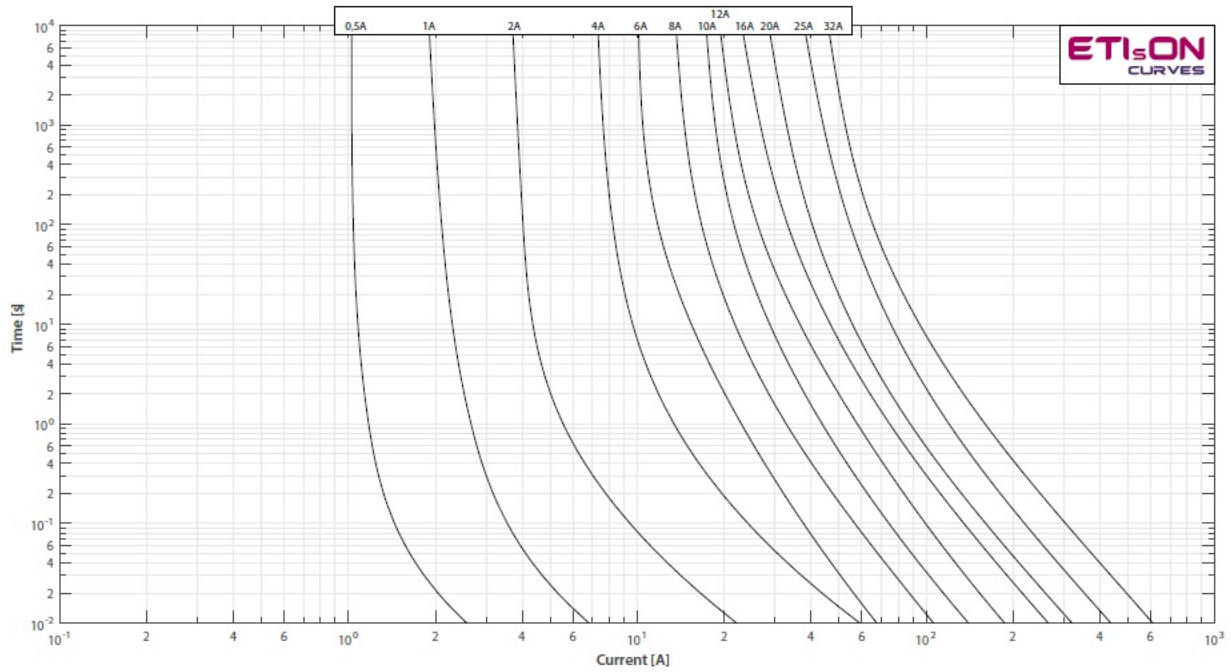

Dimension drawing

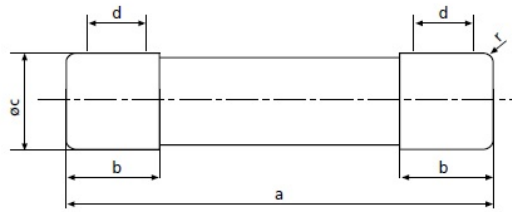

size	a	b _{max}	c	d _{min}	r
8 x 32	31,5±0,5	6,7	8,5±0,1	4	1±0,5
10 x 38	38,0±0,6	10,5	10,3±0,1	6	1,5±0,5
14 x 51	51,0+0,6/-1	13,8	14,3±0,1	7,5	±1
22 x 58	58,0+0,1/-2	16,2	22,2±0,1	11	±1

Cut-off current characteristics

Cut-off current characteristics, CH10 gG

