

KVL-1 3p M10-M10



Specifications

ETI Code	001690872
Description	KVL-1 3p M10-M10
Class name	Fuse switch disconnecter
Rated current (A)	250
Type	KVL
Size	NH1
Number of poles	3
Product group	Horizontal fuse-switch disconnecter
Rated AC voltage (V)	690
Utilization category	AC-23B / DC-22B
Connection	M10
Rated DC voltage (V)	440
Mounting	Screw-on

Online product page 

Other documentation



Technical data catalogue

Certificate

3D Model

Instruction manual


CE declaration

Eplan file



ETIM international clasification

Classification	EC001040
Class name	Fuse switch disconnecter
Version as main switch	1
Version as safety switch	1
Rated permanent current Iu	250A
Suitable for fuses	NH1
Number of poles	3
With error protection	
Type of electrical connection of main circuit	Screw connection
Suitable for floor mounting	1
Type of control element	Cover grip

Dimension drawing

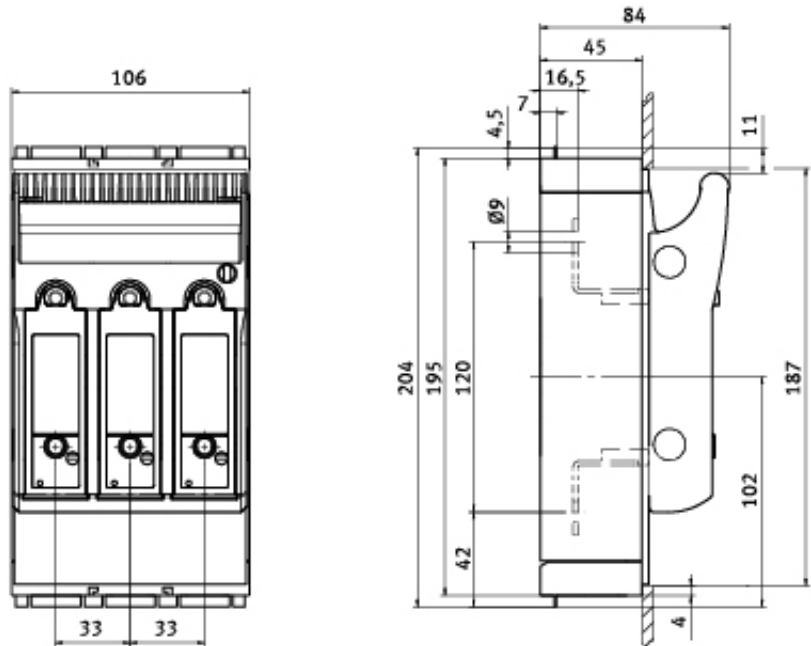

KVL-00 3p M8-M8
KVL-00 3p BC95-BC95
KVL-00 3p M8-M8 LED
KVL-00 3p BC95-BC95 LED

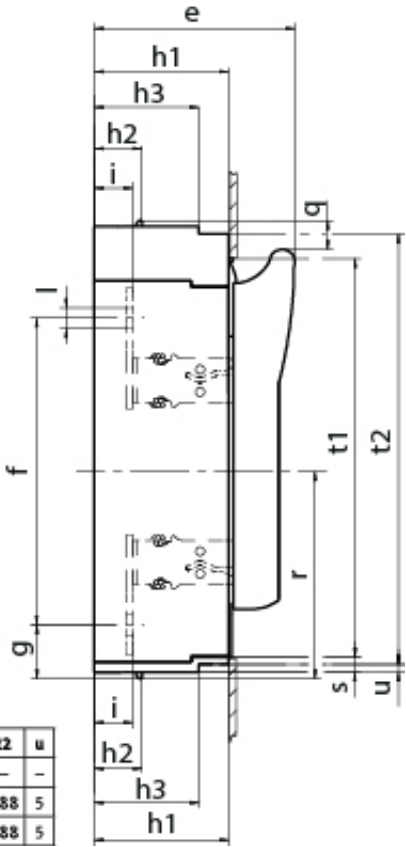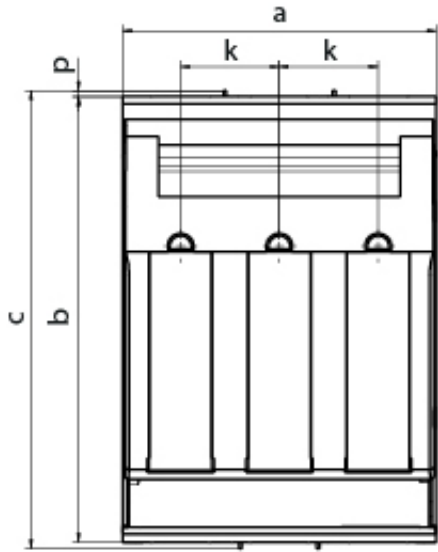

	a	b	c	e	f	g	h1	h2	h3	i	k	l	p	q	r	s	t1	t2	u
KVL-1 3p M10-M10 (LED)	184	298	306	117	185	46	70	32	-	25	58	Ø10,5	4	19	138	5	272	-	-
KVL-2 3p M10-M10 (LED)	210	298	306	134	205	36	90	32	70	26	66	Ø14	4	19	138	10	268	288	5
KVL-3 3p M10-M10 (LED)	250	298	306	143	205	36	90	32	70	26	82	Ø14	4	19	138	10	268	288	5