



Power a Clean Future.



Product Sheet (EN) | NexBlue Edge Max

## NexBlue Edge 2 | NexBlue Edge Max

EV Chargers for Domestic Scenarios



### NexBlue Edge Max

#### One for All, Ready for the Future

- Adaptive to 1.4-22 kW charging power
- All grid systems compatible: TN/TT/IT
- Always online with Ethernet / WiFi / 4G eSIM
- Fully ready for ISO 15118 / V2G / Plug & Charge
- Compatible with Local OCPP 1.6-J and 2.0.1
- Proprietary APIs for seamless integration

#### Safe by Design, Smart by Nature

- Built to last: 5-year warranty
- CE certified by TÜV Rheinland
- 40+ smart sensors ensure protection and safety
- Dynamic local/cloud load and phase balancing\*
- Automatic phase selection based on load distribution\*
- Solar surplus charging with auto 3-1 phase switching\*

#### Cost-Effective, Intuitive to Use

- Tariff charging at the lowest cost with EcoPilot mode
- Integrated with most mainstream platforms and software
- Easy-to-use myNexBlue App & Portal
- Track energy usage to improve consumption efficiency
- View real-time charging data on OLED display
- MID-compliant for company reimbursement at home

#### Fast to Install, Simple to Support

- 4-minute installation per charger
- Instant NFC commissioning with just one tap
- Backplate design enables quick and cost-effective installation, maintenance, and scalability
- Fast replacements via RFID-enabled backplate
- Remote management via NexBlue Partner App & Portal

## NexBlue Edge Max

### Dimensions



### Technical Information

#### General

##### Dimension (mm)

H: 235 x W: 230 x D: 107

##### Wall Mounting (mm)

H: 206 x W: 130

##### Weight

2.3 kg

##### Operating Temperature

-30 °C to +50 °C

##### Storage Temperature

-40 °C to +70 °C

##### Working Humidity

5% to 95%

##### Working Altitude

< 2000 m

##### External Package

Carton

##### Warranty

5 years

#### Connectivity

##### Wi-Fi

2.4 GHz 802.11b/g/n

##### Built-in eSIM

4G LTE Cat 1

##### Ethernet

RJ45, 10M / 100M

##### Bluetooth

BLE 4.2

##### Local Radio Frequency

Nexus™ RF

##### OCPP

Local OCPP 1.6-J & 2.0.1

##### ISO 15118

Ready for V2G / PnC

##### Other Interfaces

1 or 3 x CT clamps

Load shedding

RS-485

#### Charging

##### Charging Power

1.4 to 22 kW

##### Charge Connector

Type 2 Socket (IEC 62196-2)

Electronic lock with permanent lock option

##### Rated Current

6 A 1 phase to 32 A 3 phase

##### Maximum Output Current

32 A

##### Voltage

3 \* 400 V AC / 230 V AC (±10%)

##### Installation Network

TN, IT or TT (auto detect)

##### Mains Frequency

50 Hz

##### Built-in Energy Meter

MID Class B ±1% (EN 50470-3: 2022)

##### Load management

Up to 5 units per location

#### User Interface

##### Enclosure

Plastics

##### LED Indicator

Red / Green / Blue

White / Orange

##### RFID Reader

ISO / IEC 14443 Type A

MIFARE Classic®

##### Start Mode

myNexBlue App / RFID NFC /

Plug & Play / AutoCharge

NexBlue User Portal

##### Display

OLED screen

#### Protection

##### Built-in Residual Current Protection

RDC-DD (6 mA DC) according to IEC 62955 + 30 mA AC according to IEC 60947-2, annex M

##### Ingress Protection

IP54

##### Impact Protection

IK10

##### UV Resistant

##### Insulation Class

I

##### Overvoltage Category

III

##### EMC Level

CLASS B

##### Other Protection

Overload protection

Over/under voltage protection

Temperature protection

Relay welding protection

Ground fault protection

PE presence detection

CP diode presence detection

Humidity monitoring

#### Regulations

##### Compliant with

2014/53/EU (RED) | 2014/35/EU (LVD)

2014/30/EU (EMC) | 2011/65/EU (RoHS)

##### EU Type Examination Certificate (Module B & Module D) Confirming Compliant with

2014/32/EU (MID)


##### REACH Regulation (EC) No 1907/2006

##### See DoC for details at

<https://nexblue.com/pages/document-and-manuals>


## Build a Smart Charging Experience

Software Designed for Users

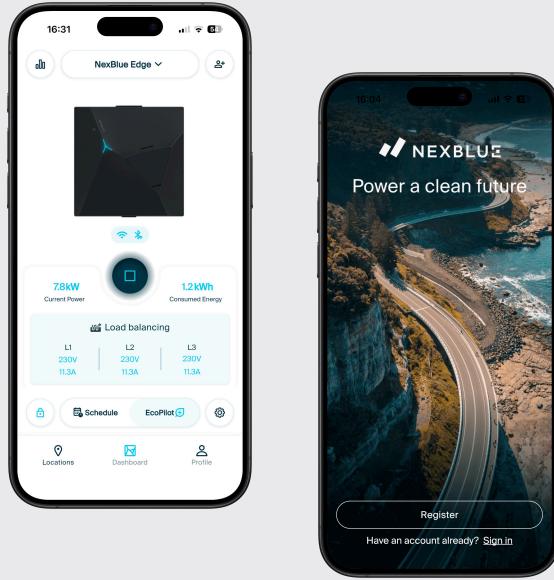


### myNexBlue App enables users to

- Monitor and control your charging smartly
- Seamless Local Control via Bluetooth
- Schedule your charging in the most affordable and cleanest way
- Track your charging statistics and history
- Integrated with external service providers via local OCPP or our proprietary APIs
- Share your chargers' access with your family and friends
- Multiple charging on/off options: Plug&Play, RFID, mobile NFC, and App control
- Online diagnosis and OTA upgrades

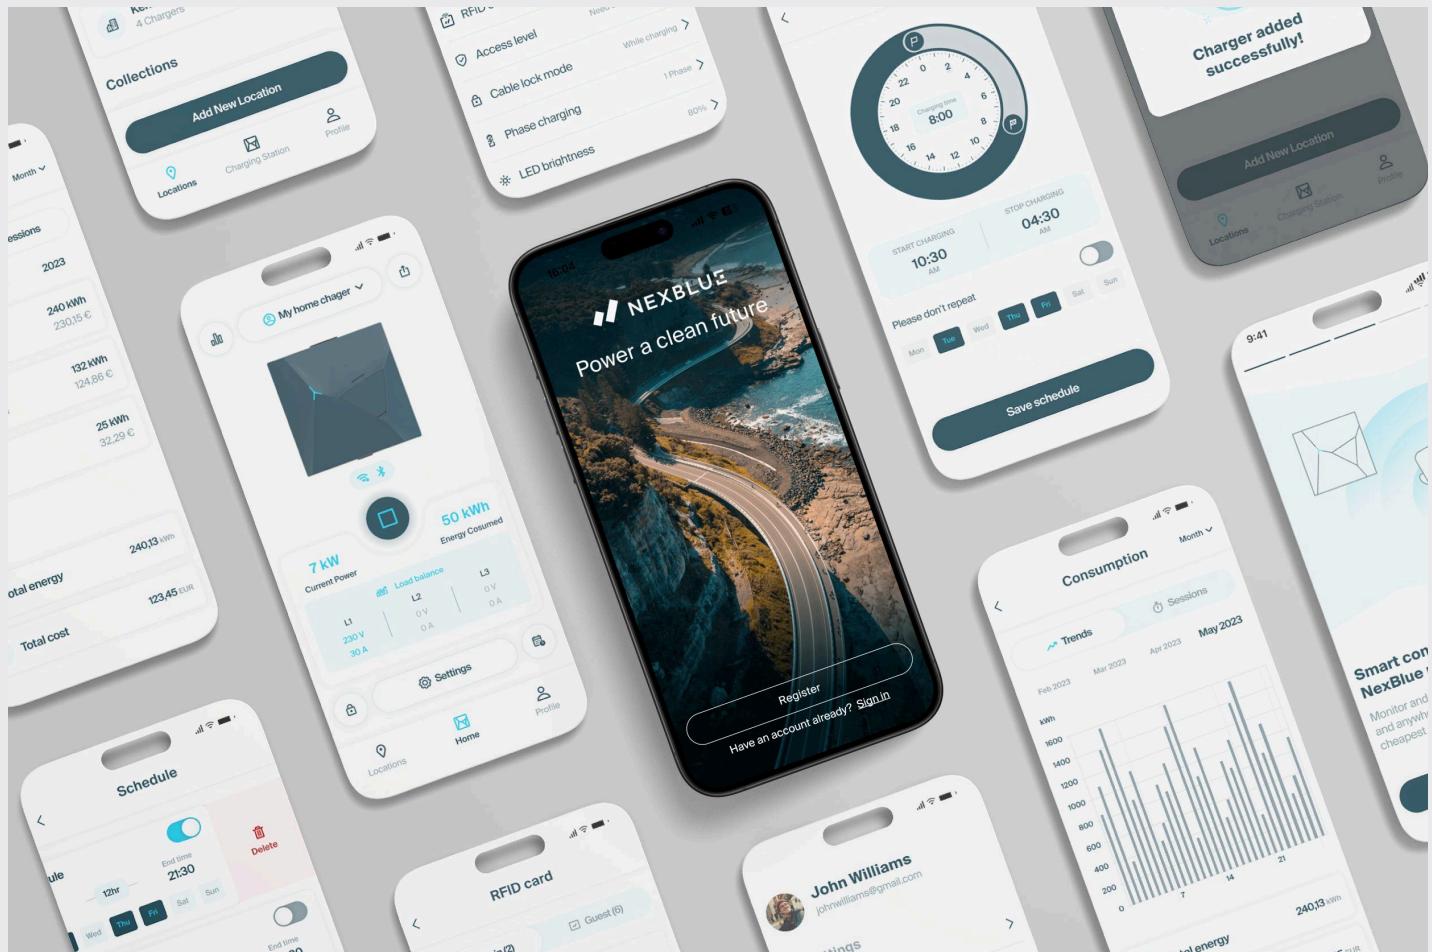

## Build a Smart Installation Experience

Software Designed for Installers and Organizations

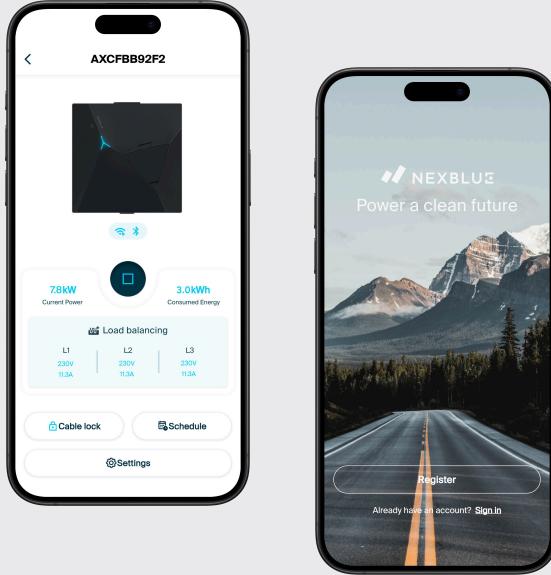


### NexBlue Partner App enables installers to

- Create new installation locations or manage existing ones
- Configure new chargers
- Conduct post-configuration testing for the chargers
- Facilitate the transfer of locations to new owners
- Monitor real-time status for maintenance purposes
- Change operators as the owners' preferences

### NexBlue Partner Portal enables installers and organizations to

- Oversee and monitor installation locations
- Provide real-time status monitoring and reconfiguration for installed chargers
- Visualize and export charging session essential data for after-sales support
- Facilitate pre-configurations prior to installations
- View and export charging consumption data by user, charger or RFID card
- Collaboratively manage all installations within Organization with members

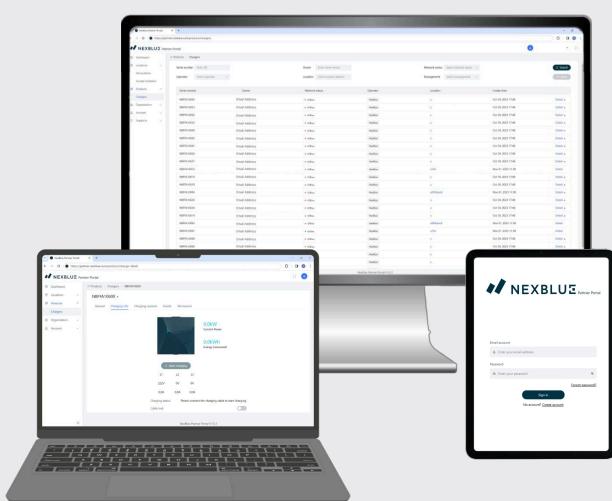

## ISO 15118, V2G and Plug & Charge

At NexBlue, we view ISO 15118 as a strategic priority, enabling both V2G (Vehicle-to-Grid) energy interaction and Plug & Charge seamless authentication. These are not just charging features, but key building blocks of the future energy ecosystem.

NexBlue chargers are designed as core nodes of a clean energy future — integrating with solar, storage, and the grid to make every EV part of a smarter, greener, more resilient energy system.

NexBlue believes ISO 15118, V2G and Plug & Charge are not only standards, but foundations of a zero-carbon future.

### Benefits

**Drivers** enjoy secure, instant authentication and payment with Plug & Charge, while V2G turns their EV into a home and grid energy resource, lowering costs and boosting independence.

**Utilities & energy providers** gain flexible grid balancing and standardized billing, unlocking new business models.

**Fleets & enterprises** streamline operations with automated settlement and can monetize idle energy by feeding it back to the grid.

### Implementations

#### ISO 15118-3

Hardware Ready

#### ISO 15118-2

AC Charging, V2G, Plug and Charge (PnC)

#### ISO 15118-20

AC Charging, AC BPT\* (V2G), Plug and Charge (PnC)

\* BPT: Bidirectional Power Transfer


## Technical Information

### ISO 15118-2 & ISO 15118-20

<b>Application Layer</b> OSI layer 7	Application layer messages (V2G Message), SDP (SECC Discovery Protocol)	●
<b>Presentation Layer</b> OSI layer 6	EXI (Efficient XML Interchange)	●
<b>Session Layer</b> OSI layer 5	V2GTP (Vehicle-to-Grid Transfer Protocol)	●
<b>Transport Layer</b> OSI layer 4	UDP, TCP, TLS	●
<b>Network Layer</b> OSI layer 3	IP, SLAAC, DHCP	●

### ISO 15118-3

<b>Data link Layer</b> OSI layer 2	SLAC(Signal Level Attenuation Characterization)	●
<b>Physical Layer</b> OSI layer 1	PLC(Power Line Communication)	●

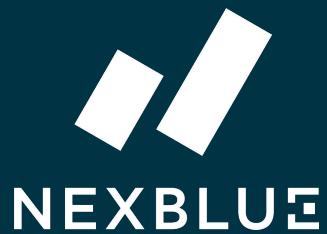

**Sweden Office**  
Birger Jarlsgatan 57 C  
113 56 Stockholm, Sweden

**Norway Office**  
Grenseveien 21  
4313 Sandnes, Norway

**General Inquiry Email**  
[info@nexblue.com](mailto:info@nexblue.com)

**Website**  
[www.nexblue.com](http://www.nexblue.com)



LinkedIn  
[@nexblue](#)



Instagram  
[@nexblue.official](#)