

TR 641 top3 BLE RC

Item no.: 6410330

theben

Time and light control Digital time switches

Description

- Digital time switch with yearly and astronomical time program
- App programming possible thanks to integrated BLE module
- Extensive yearly time switching functions
- Astronomical switching function (automatic calculation of sunrise and sunset times for the whole year)
- Astro selectable per channel "3 astro ranges: sunset, twilight, darkness"
- Earth Hour pre-programmed until 2044
- Time synchronisation via connection of external DCF or GNSS antennas, additional positioning for astronomical program with GNSS
- 1 channel
- External input
- Connectable sensors (external selector switch, sequence timer)
- Connectable switches (ON or OFF permanent switching)
- DuoFix spring terminals
- For 2 conductors each
- Wire or strand (with or without wire end sleeve)
- Wire diameter: 0.5 - 2.5 mm²
- Button for releasing plug-in connection
- Text-oriented user guidance in display
- Preset date and time
- fully operable without mains connection
- 800 memory locations
- Interface for OBELISK top2 memory card (PC programming)
- 2. insertable switching program
- Copying programs
- Storing programs
- 10 year power reserve (lithium battery)
- Zero-cross switching for leay-saving switching and high lamp loads (not with 24 V devices)
- Automatic summer/winter time changeover
- can be deactivated
- Date rule options are already stored for Europe, the USA and other countries
- own date rule options or changeover around set dates are available
- ON-OFF switching times
- Pulse program
- Cycle program
- Extensive yearly clock functions
- Basic weekly program and 14 different weekly programs with priority levels and date ranges
- Permanent ON / permanent OFF with highest priority via date range program option



Subject to technical changes and misprints

additional information at: www.theben.de/product/6410330

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

TR 641 top3 BLE RC

Item no.: 6410330



Description

- fixed and variable public holidays, public holidays dependent on Easter, day and date ranges with serial pattern
- Public holiday database for Germany including all Federal states, Switzerland, France etc.
- Program simulation on clock display
- Astronomical time switch function (automatic calculation of sunrise and sunset times for the whole year)
- Offset for adjusting of sunrise and sunset times
- Position data via coordinates or country/city lists can be programmed
- Optional production of own city list (favourites) and a table with own astronomical times on PC
- Fixed ON-OFF switching times can be programmed (e.g. night time interruption)
- Simulation of astronomical switching times (calculated astronomical times and programmed ON/OFF switching times) for the whole year
- various astronomical setting options (evening ON - mornings OFF or evenings OFF - mornings ON, astronomical pulse)
- Switching preselection
- Permanent switching ON/OFF
- Count-down timer
- Integrated operating hour counter
- Reset option
- Service function for monitoring maintenance intervals
- Holiday program
- 2 random programs
- Display back light (can be turned off)
- PIN coding

Technical data

| TR 641 top3 BLE RC | |
|---|--------------------------------------|
| Operating voltage | 110 - 230 V AC |
| Frequency | 50 - 60 Hz |
| Width | 3 modules |
| Installation type | DIN rail |
| Type of contact | Changeover contact |
| Switching output | Phase-independent |
| Opening width | < 3 mm |
| Program | Yearly program, Astronomical program |
| Program functions | ON-OFF, Pulse, Cycle |
| Number of channels | 1 |
| External inputs | 1 |
| Number of memory locations | 800 |
| Power reserve | 10 years |
| Switching capacity at 250 V AC, cos φ = 1 | 16 A |
| Switching capacity at 250 V AC, cos φ = 0,6 | 10 A |
| Incandescent/halogen lamp load | 2600 W |
| LED lamp < 2 W | 50 W |

| TR 641 top3 BLE RC | |
|---------------------------------|--|
| LED lamp 2-8 W | 600 W |
| LED lamp > 8 W | 600 W |
| Switching capacity min. | ca. 10 mA |
| Shortest switching times | 1 s |
| Time accuracy at 25 °C | $\leq \pm 0,5$ s/day (quartz) or DCF77 / GNSS |
| Time basis | Quartz/DCF77/GNSS |
| Stand-by consumption | ~0.5 W |
| Memory card supplied | - |
| Type of connection | DuoFix spring terminals |
| Externe Antenne anschließbar | ✓ |
| Display | LCD |
| Keyboards | 4 touch buttons |
| Housing and insulation material | High-temperature resistant, self-extinguishing thermoplastic |
| Type of protection | IP 20 |
| Protection class | II according to EN 60 730-1 |
| Voltage | 110-240 V AC |

Subject to technical changes and misprints

additional information at: www.theben.de/product/6410330

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/01/2026

Page 2 of 4


TR 641 top3 BLE RC

Item no.: 6410330


Technical data

| TR 641 top3 BLE RC | |
|---------------------|----------------------|
| Ambient temperature | -30°C ... 50°C |
| Predecessor | 6410100, TR 641 top2 |

Connection example

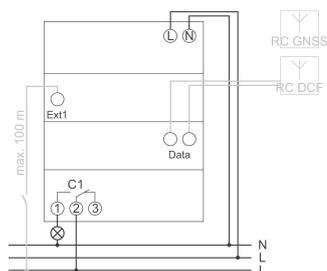

Scale drawings

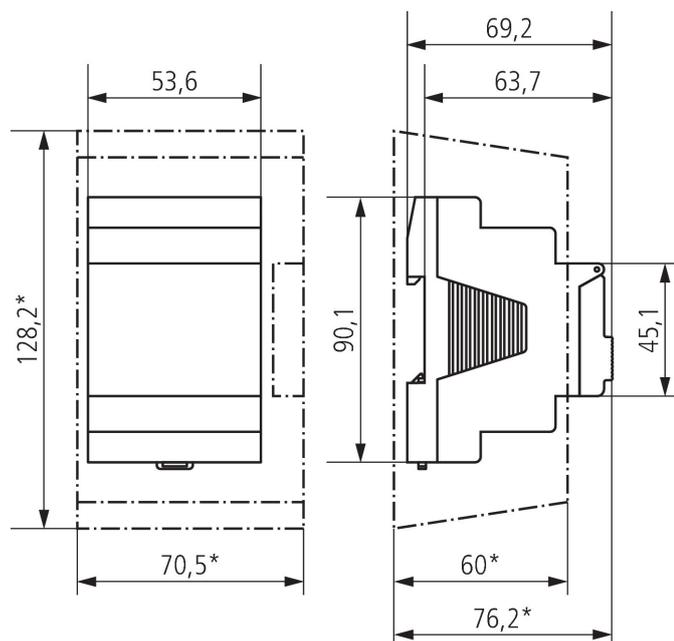

Subject to technical changes and misprints

additional information at: www.theben.de/product/6410330

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

TR 641 top3 BLE RC

Item no.: 6410330



Accessories

Wall mounting kit 52,5 mm

Item no.: 9070050



Antenna RC-DCF

Item no.: 9070410



PC set OBELISK top2/3

Item no.: 9070409



Memory card OBELISK top2

Item no.: 9070404



Front panel kit

Item no.: 9070001



Antenna RC-GNSS R

Item no.: 9070807



Antenna RC-GNSS

Item no.: 9070823



Subject to technical changes and misprints

additional information at: www.theben.de/product/6410330

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/01/2026

Page 4 of 4