

LUXA 103 S360-12 KNX UP WH

Item no.: 1039052

theben

Presence and motion detectors Ceiling installation indoor

Description

- Presence detector (PIR) for flush-mounted ceiling installation indoor
- Round detection area 360°, Ø 12 m (113 m²) at 3 m mounting height
- For KNX bus system, 2 channels light and 2 channels presence for HVAC control
- 2 channels light with 1 light measurement
- Automatic lighting control with constant light control or switching mode

- Dimmable lighting in switching mode with and without daylight influence
- Integrated temperature sensor
- Day / night switching via telegram
- Stand-by functionality (orientation light)
- 3 logic channels (AND/OR/XOR)
- KNX Data-Secure
- Operation as fully or semi-automatic possible
- Manual override possible via external KNX push-buttons
- One directional brightness measurement (mixed light measurement)
- Simple adjustment of the brightness measurement
- Short-term presence
- Selectable control speed
- Teach-in function
- Scene functionality
- Locking functions
- Switch-on delay and presence follow-up time adjustable
- Extension of the detection area through parallel connection
- Detection sensitivity can be changed for outdoor use
- Test mode for checking function and detection area
- Setting via ETS software (full range of functions)
- Setting via remote control/APP or APP (BLE)



Technical data

LUXA 103 S360-12 KNX UP WH	
Installation height	2.5 - 6 m
Measuring range brightness	5 - 1000 lx
Detection angle	360°
Type of connection	KNX bus terminal
Installation type	Ceiling installation
Light switch-off delay	30 s - 60 min
Lamp types	Energy saving lamps, fluorescent lamps, Incandescent/halogen lamps, LEDs

LUXA 103 S360-12 KNX UP WH	
Light measurement	Mixed light measurement
Presence switch-off delay	10 s - 120 min
Switch-on delay presence	10 s - 30 min / inactive
Ambient temperature	-25°C ... 55°C
Detection range	113 m² (Ø 12 m 360°)
Colour	White
Type of protection	IP 54 (when fitted)
KNX Data Secure	✓

Subject to technical changes and misprints

additional information at: www.theben.de/product/1039052

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.


LUXA 103 S360-12 KNX UP WH

Item no.: 1039052

theben

Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Sitting (S)	Diagonally (T)	Head on to (R)
2,5 m	13 m ² 4 m	78 m ² 10 m	28 m ² 6 m
3 m	20 m ² 5 m	113 m ² 12 m	28 m ² 6 m
3,5 m	20 m ² 5 m	78 m ² 10 m	28 m ² 6 m
4 m		78 m ² 10 m	28 m ² 6 m
6 m		113 m ² 12 m	28 m ² 6 m

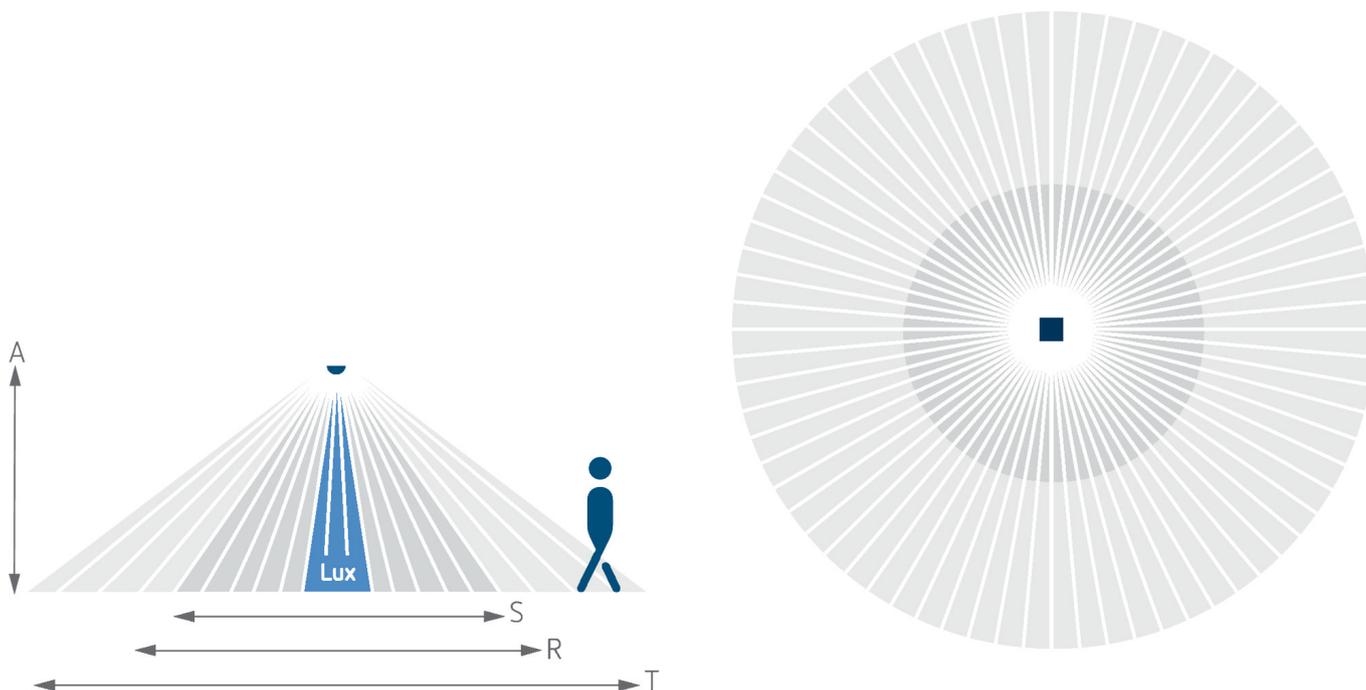

Subject to technical changes and misprints

additional information at: www.theben.de/product/1039052


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXA 103 S360-12 KNX UP WH

Item no.: 1039052



Scale drawings

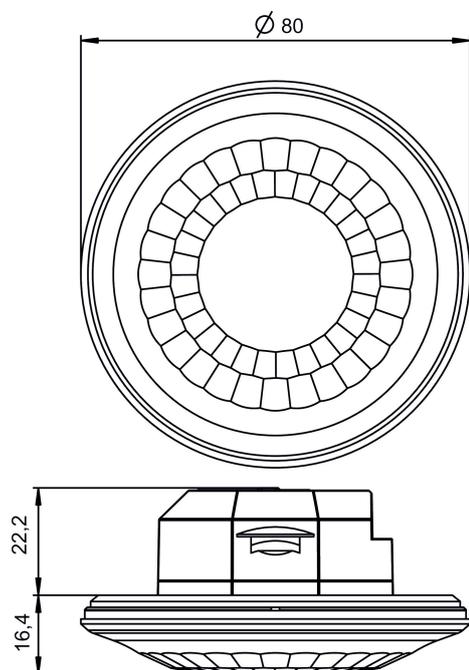

Accessories

theSenda P
Item no.: 9070910



theSenda S
Item no.: 9070911



theSenda B
Item no.: 9070985



Ceiling installation box 68A
Item no.: 9070992



Surface box LUXA 103 B WH
Item no.: 9080019



Surface box LUXA 103 B GR
Item no.: 9080020



Surface box LUXA 103 B BK
Item no.: 9080021



Adapter set Switzerland
Item no.: 9070842



Subject to technical changes and misprints

additional information at: www.theben.de/product/1039052

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXA 103 S360-12 KNX UP WH


Item no.: 1039052

theben

Accessories

QuickSafe

Item no.: 9070531

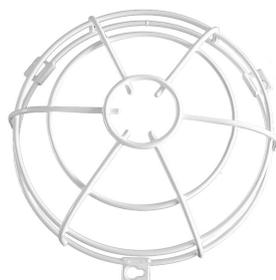

Adapter set CH LUXA 103 WH

Item no.: 9080052



Subject to technical changes and misprints

additional information at: www.theben.de/product/1039052

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

20/01/2026

Page 4 of 4