

theMura P180 2.20 KNX UP WH

Item no.: 2069658

theben

Presence and motion detectors Wall installation indoor

Description

- Passive infrared presence detector for wall mounting flush-mounted
- Rectangular detection area 170°, 16 x 10 m (160 m²) at 2.2 m mounting height
- 2 channels light and 2 channels HVAC
- Switching or constant light control with stand-by functionality (orientation light)
- Dimmable lighting in switching mode with and without daylight influence
- Simple adjustment of brightness measurement
- Short-time presence
- Selectable control speed
- Aura function
- Scene functionality
- Integrated orientation light (white)
- Integrated temperature sensor
- Acoustic function
- 2 binary inputs
- 6 logic channels (AND, OR, XOR)
- KNX Data-Secure
- Operation as fully or semi-automatic possible
- Integrated, freely parameterisable push-button (can be deactivated)
- Manual override via external KNX push-button possible
- One directional brightness measurement (mixed light measurement)
- Teach-in function
- Locking functions
- HVAC channel without brightness influence
- Switch-on delay and follow-up time of HVAC channel adjustable
- Extension of the detection range by master/slave or master/master switching
- Detection sensitivity adjustable
- Test mode for checking function and detection range
- Settings via ETS software (full range of functions)
- Limited setting options with app/universal remote control theSenda B
- Limited setting possibilities with service remote control theSenda P
- With Theben cover frame



Technical data

| theMura P180 2.20 KNX UP WH | |
|-----------------------------|-------------------|
| Measuring range brightness | 5 - 3000 lx |
| Installation type | Wall installation |
| Light switch-off delay | 30 s - 60 min |

| theMura P180 2.20 KNX UP WH | |
|-----------------------------|-------------------------|
| Light measurement | Mixed light measurement |
| Presence switch-off delay | 10 s - 120 min |
| Ambient temperature | -15°C ... 45°C |

Subject to technical changes and misprints

additional information at: www.theben.de/product/2069658

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theMura P180 2.20 KNX UP WH


Item no.: 2069658

theben


Technical data

| theMura P180 2.20 KNX UP WH | | theMura P180 2.20 KNX UP WH | |
|-----------------------------|-------|-----------------------------|------------------------------------|
| Colour | White | Predecessor | 2009050, PresenceLight 180B-KNX WH |
| Type of protection | IP 20 | KNX Data Secure | ✓ |

Detection range for planning applications at a temperature of 21 °C

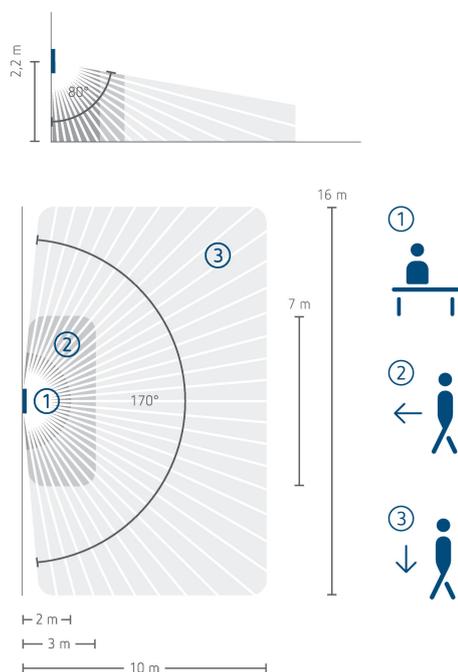

Scale drawings

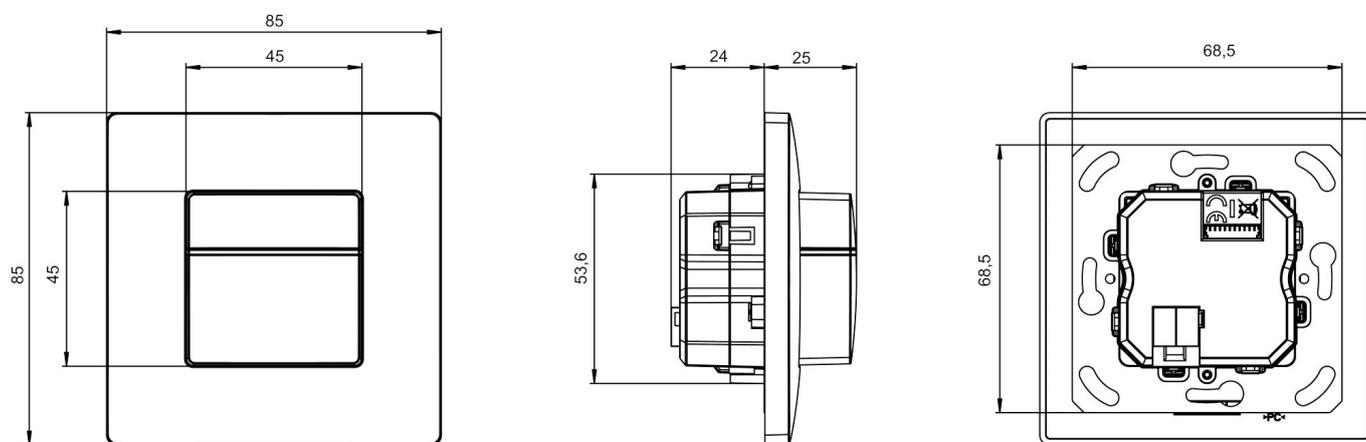

Subject to technical changes and misprints

additional information at: www.theben.de/product/2069658

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

18/05/2025

Page 2 of 3

theMura P180 2.20 KNX UP WH

Item no.: 2069658



Accessories

theSenda P

Item no.: 9070910



theSenda S

Item no.: 9070911



Surface frame LUXA 103-200

Item no.: 9070504



theSenda B

Item no.: 9070985



Adapter frame 45A BJBSI WH

Item no.: 9070788



Adapter frame 45A MMP WH

Item no.: 9070790



Adapter frame 45A GS WH

Item no.: 9070791




Adapter frame 45A JAS WH

Item no.: 9070789



Adapter frame 45A BS WH

Item no.: 9070792



Adapter frame 45A BJRE WH

Item no.: 9070754



Subject to technical changes and misprints

additional information at: www.theben.de/product/2069658

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.