

JU 1 S RF KNX

Item no.: 4941651

KNX

Flush-mounted actuators

Description

- Flush-mounted 1-way blind actuator 5 A, KNX RF, Data Secure
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (I2)
- For controlling drives for blinds, roller blinds, sun and vision protection devices, skylights, and ventilation flaps
- Integrated automatic ventilation function
- Secure communication via KNX-RF with support from KNX Data Secure
- Easy installation due to the compact housing
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (I2)
- Integrated temperature monitoring for increased operating safety, e.g. in the event of overload
- The binary inputs are assigned to the output as standard (function test before programming)




Technical data

JU 1 S RF KNX	
Operating voltage KNX	Bus voltage
Operating voltage	230 V AC - 240 V AC, 50 Hz - 60 Hz
Frequency	50 - 60 Hz
Installation type	Flush-mounted
Type of connection	Screw terminals

JU 1 S RF KNX	
Number of channels	1
Type	Base module
Protection class	II
Predecessor	4941650, JU 1 RF KNX

Connection example

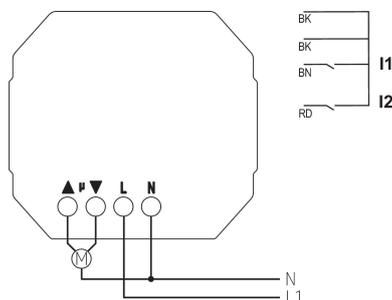

Subject to technical changes and misprints

additional information at: www.theben.de/product/4941651


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

JU 1 S RF KNX

Item no.: 4941651

theben

Scale drawings

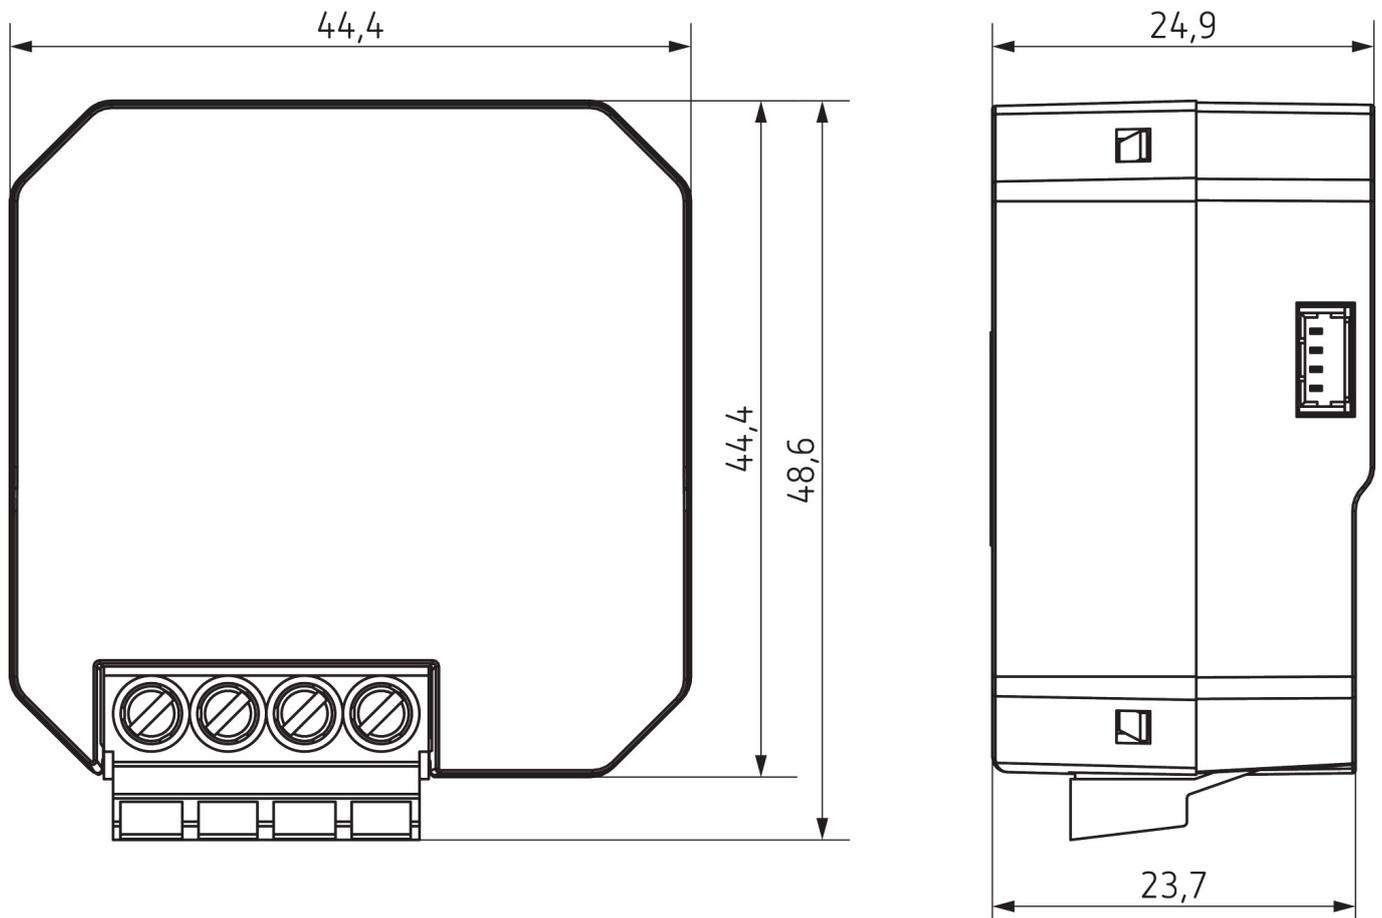


Accessories

Temperature sensor
Item no.: 9070321



Temperature sensor RAMSES IP
65
Item no.: 9070459



Flush-mounted temperature
sensor
Item no.: 9070496



Subject to technical changes and misprints

additional information at: www.theben.de/product/4941651

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.