

# thePrema S360-101 E UP BK

Item no.: 2070607

**theben**

Presence and motion detectors  
Ceiling installation indoor

## Description

---

- Passive infra-red presence detector for flush-mounted ceiling installation
- Square detection area 360°, 7 x 7 m, (49 m<sup>2</sup>) at mounting height 3 m
- 1 channel light (Relay, 230 V) and 1 channel presence (Relay, floating for HVAC control)
- Automatic presence- and brightness-dependent control for lighting and HVAC
- Mixed light measurement suitable for fluorescent lamps (FL/PL/ESL), halogen/incandescent lamps and LEDs
- Choice of fully or semi-automatic operation
- Adjustable brightness switching value, teach-in function
- Self-learning time delay
- Reduction of switch-off delay time in the event of short presence (brief-presence)
- Connection option for sensors or switches for manual switching with automatic recognition of sensor/switch
- Pulse function for staircase light time switch
- Channel H, presence: relay, floating e.g. for HVAC control
- Switch-on delay and switch-off delay configurable
- Room monitoring with selective movement detection
- Ready for immediate use due to factory preset
- Exceptionally easy configuration of the energy-saving behaviour with the new «eco plus» function
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Flexible relay operating modes
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, management remote control SendaPro (optional)
- \* According to warranty terms and conditions, see [www.theben.de/en/guarantee](http://www.theben.de/en/guarantee)



Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070607](http://www.theben.de/product/2070607)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# thePrema S360-101 E UP BK


Item no.: 2070607



## Technical data

thePrema S360-101 E UP BK		thePrema S360-101 E UP BK	
Operating voltage	110 V AC - 230 V AC $\pm$ 10 %	Energy saving lamps	16 x 54/58 W, 24 x 35/36 W, 8 x 2 x 54/58 W, 12 x 2 x 35/36 W
Frequency	50 - 60 Hz	LED lamp < 2 W	60 W
Installation height	2 - 3 m	LED lamp 2-8 W	600 W
Minimum height	1.7 m	LED lamp > 8 W	600 W
Installation type	Ceiling installation, Indoor, Flush-mounted	Switch-on delay presence	0 s - 10 min / Room surveillance
Colour	Black	Presence switch-off delay	10 s - 120 min
Switching output	Light   Presence	Type of contact presence	Relay potential-free
Power consumption	$\sim$ 0.1 W	Switching capacity presence	50 W / 50 VA (max. 2 A), min. 0.5 mV / 10mA
Light measurement	Mixed light measurement	Type of connection	Screw terminals
Setting range brightness	5 - 3000 lx	Max. cable cross section	max. 2 x 2,5 mm <sup>2</sup>
Light switch-off delay	10 s - 60 min	Size of concealed housing	55 mm
Type of contact light	Relay 230 V/10 A $\mu$ -contact	Detection range	49 m <sup>2</sup> (7,0 x 7,0 m)
Lamp types	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs	Detection angle	360°
Incandescent/halogen lamp load	2300 W	Ambient temperature	0°C ... 50°C
Compact and fluorescent lamps	1150 VA (cos $\phi$ = 0,5)	Impact resistance	IK04
Inrush current	max. 800 A / 200 $\mu$ s	Type of protection	IP 40 (when fitted)

## Connection example

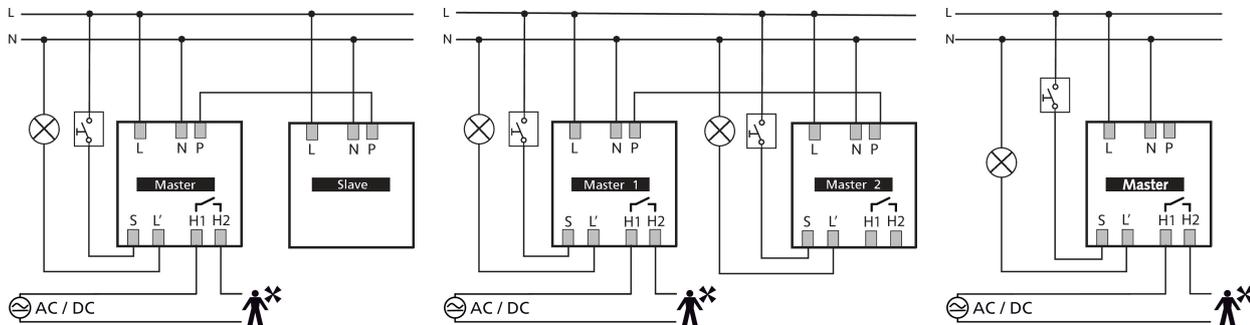

## Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Sitting (S)	Walking (T)
2 m	9 m <sup>2</sup>   3 m x 3 m	20 m <sup>2</sup>   4.5 m x 4.5 m $\pm$ 0.5 m
2.5 m	16 m <sup>2</sup>   4 m x 4 m	36 m <sup>2</sup>   6 m x 6 m $\pm$ 0.5 m
3 m	25 m <sup>2</sup>   5 m x 5 m	49 m <sup>2</sup>   7 m x 7 m $\pm$ 1 m
3.5 m		64 m <sup>2</sup>   8 m x 8 m $\pm$ 1 m

Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070607](http://www.theben.de/product/2070607)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026


Page 2 of 4

# thePrema S360-101 E UP BK

Item no.: 2070607

theben


Detection range for planning applications at a temperature of 21 °C

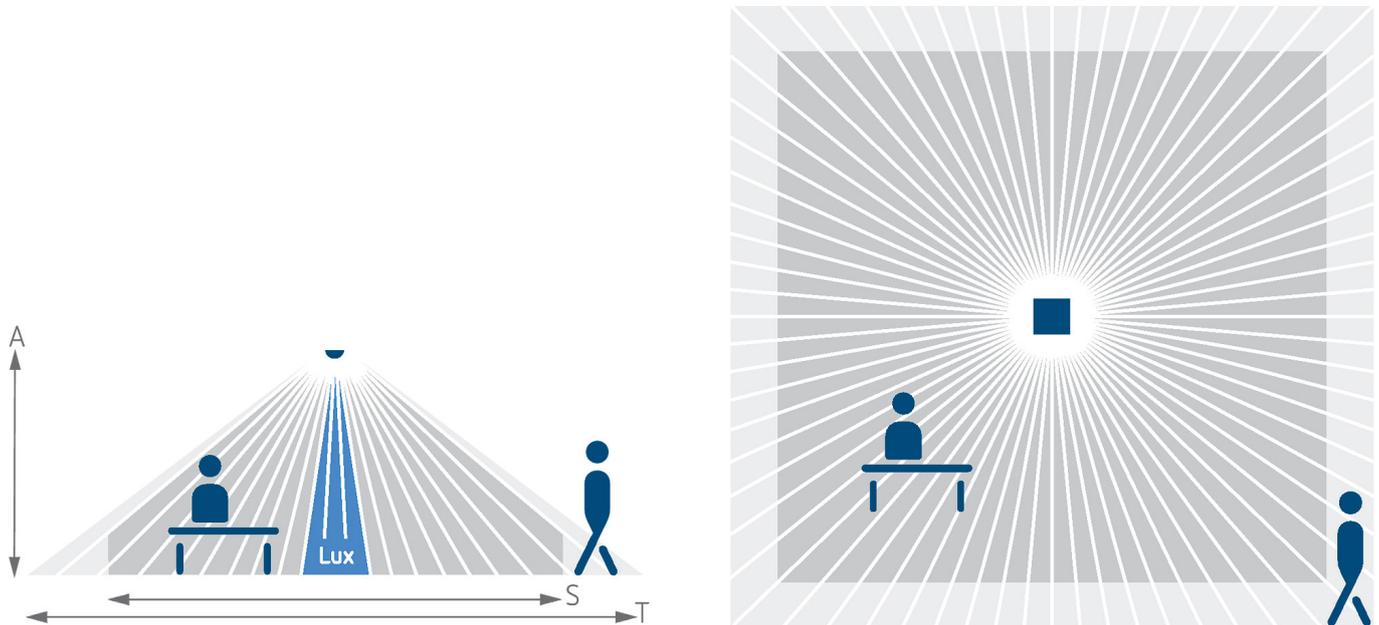

Detection range according to Sensnorm IEC 63180

Mounting height (A)	Diagonally (T)	Head on to (R)	Sitting (S)
2.5 m	40 m <sup>2</sup>   6.3 m x 6.3 m	22 m <sup>2</sup>   4.7 m x 4.7 m	20 m <sup>2</sup>   4.5 m x 4.5 m

Scale drawings

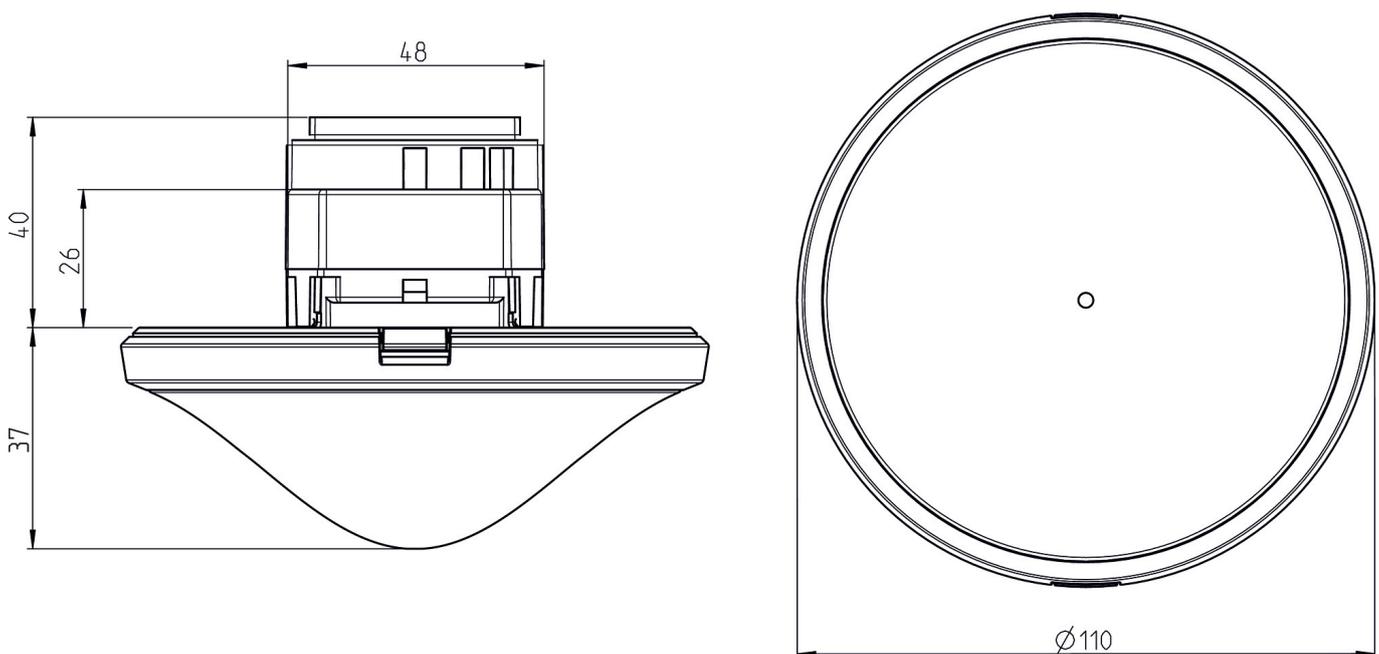

Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070607](http://www.theben.de/product/2070607)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 3 of 4

# thePrema S360-101 E UP BK

Item no.: 2070607

# theben

## Accessories

### theSenda P

Item no.: 9070910



### theSenda S

Item no.: 9070911




### Ceiling installation box 73A

Item no.: 9070917

### QuickSafe

Item no.: 9070531

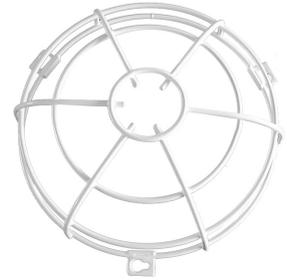

### theSenda B

Item no.: 9070985



### Ceiling installation box 68A

Item no.: 9070992



### Surface frame 110A BK

Item no.: 9070600



Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070607](http://www.theben.de/product/2070607)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.