

# thePrema S360 Slave E UP BK

Item no.: 2070632

**theben**

Presence and motion detectors  
Ceiling installation indoor

## Description

---

- Passive infra-red presence detector for flush-mounted ceiling installation
- Square detection area 360°
- Slave version for thePrema master presence detectors
- Ready for immediate use due to factory preset
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, management remote control SendaPro (optional)
- \* According to warranty terms and conditions, see [www.theben.de/en/guarantee](http://www.theben.de/en/guarantee)



Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070632](http://www.theben.de/product/2070632)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# thePrema S360 Slave E UP BK


Item no.: 2070632



## Technical data

thePrema S360 Slave E UP BK		thePrema S360 Slave E UP BK	
Operating voltage	110 V AC - 230 V AC $\pm$ 10 %	Lamp types	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Frequency	50 - 60 Hz	Type of connection	Screw terminals
Installation height	2 - 3 m	Max. cable cross section	max. 2 x 2,5 mm <sup>2</sup>
Minimum height	1.7 m	Size of concealed housing	55 mm
Installation type	Ceiling installation, Indoor, Flush-mounted	Detection range	49 m <sup>2</sup> (7,0 x 7,0 m)
Colour	Black	Detection angle	360°
Switching output	Slave	Ambient temperature	0°C ... 50°C
Power consumption	~0.1 W	Type of protection	IP 40 (when fitted)
Light measurement	Mixed light measurement		

## Connection example

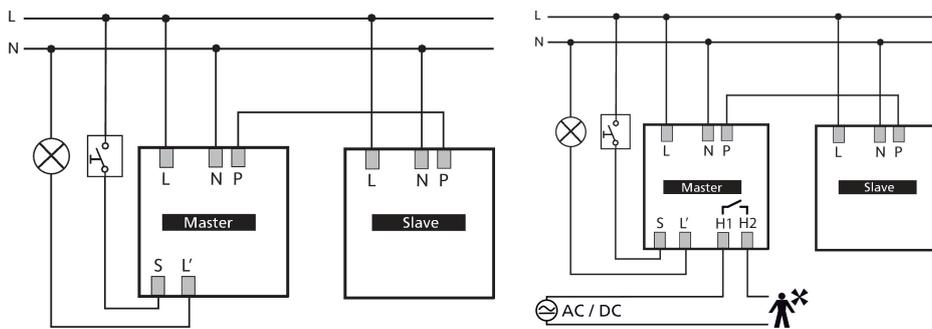

## Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Sitting (S)	Walking (T)
2 m	9 m <sup>2</sup>   3 m x 3 m	20 m <sup>2</sup>   4.5 m x 4.5 m $\pm$ 0.5 m
2.5 m	16 m <sup>2</sup>   4 m x 4 m	36 m <sup>2</sup>   6 m x 6 m $\pm$ 0.5 m
3 m	25 m <sup>2</sup>   5 m x 5 m, 25 m <sup>2</sup>   5 m x 5 m	49 m <sup>2</sup>   7 m x 7 m $\pm$ 1 m
3.5 m		64 m <sup>2</sup>   8 m x 8 m $\pm$ 1 m

Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070632](http://www.theben.de/product/2070632)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# thePrema S360 Slave E UP BK

Item no.: 2070632

theben


Detection range for planning applications at a temperature of 21 °C

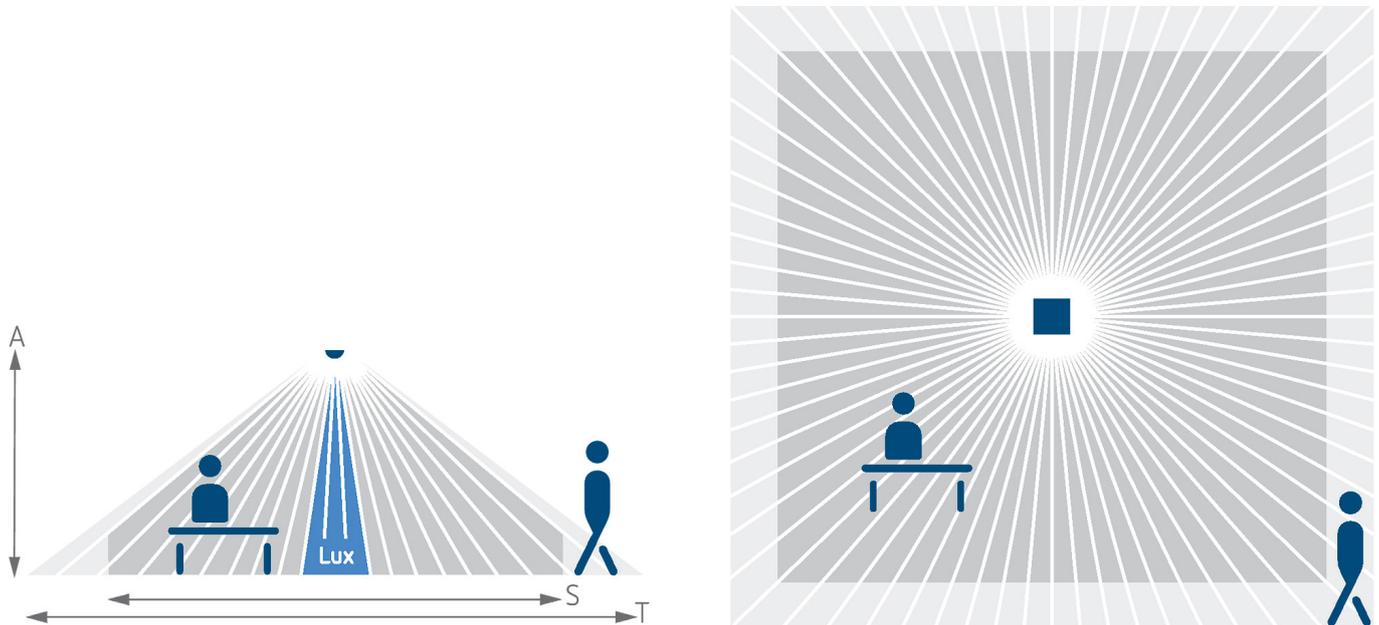

Detection range according to Sensnorm IEC 63180

Mounting height (A)	Diagonally (T)	Head on to (R)	Sitting (S)
2.5 m	40 m <sup>2</sup>   6.3 m x 6.3 m	22 m <sup>2</sup>   4.7 m x 4.7 m	20 m <sup>2</sup>   4.5 m x 4.5 m

Scale drawings

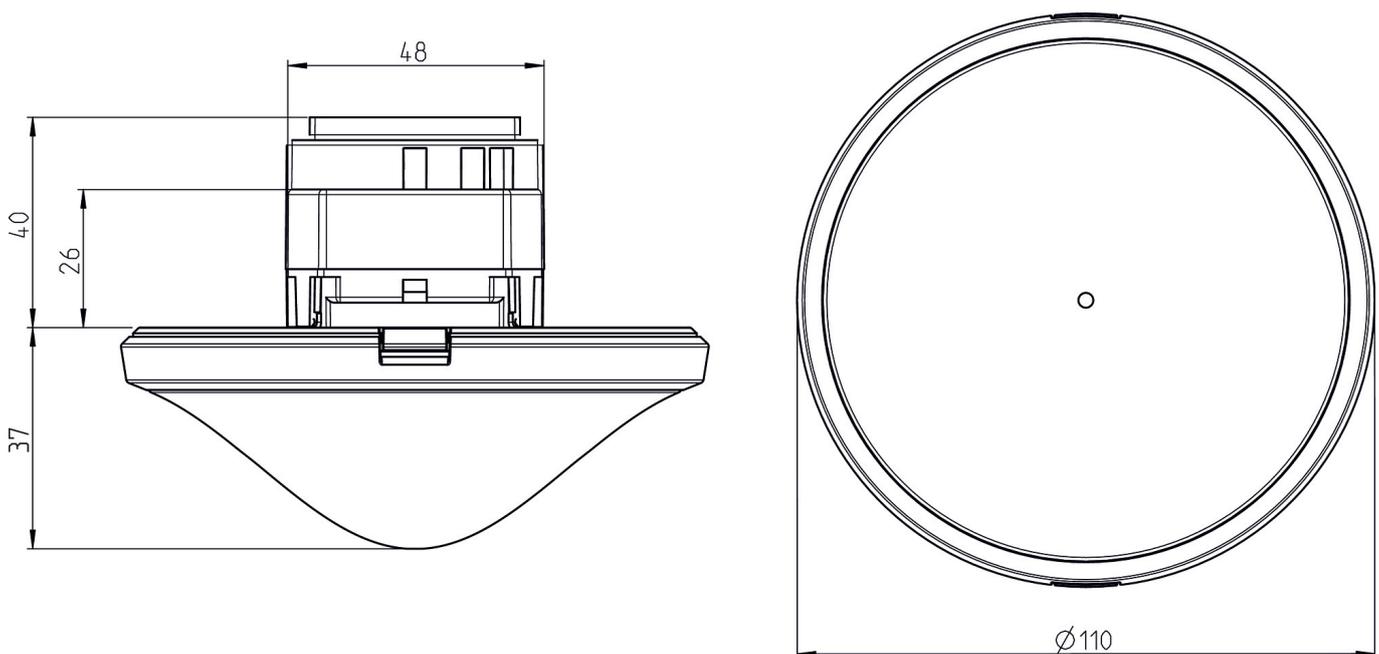

Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070632](http://www.theben.de/product/2070632)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 3 of 4

# thePrema S360 Slave E UP BK

Item no.: 2070632



## Accessories

### theSenda P

Item no.: 9070910




### Ceiling installation box 73A

Item no.: 9070917

### QuickSafe

Item no.: 9070531

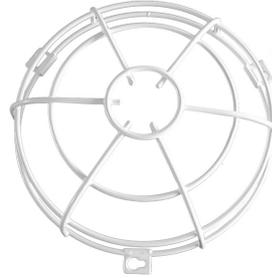

### theSenda B

Item no.: 9070985



### Ceiling installation box 68A

Item no.: 9070992



### Surface frame 110A BK

Item no.: 9070600



Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070632](http://www.theben.de/product/2070632)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 4 of 4