

SU 1 DALI-2

Item no.: 4940091

DALI
DALI gateways and actuators

Description

- 1-way DALI-2 switching actuator flush-mounted
- For the control of loads with 230 V AC mains voltage such as lamps, fans, pumps, etc.
- Additionally suitable for applications with extra-low voltage or control of a higher-level control system (HVAC), etc.
- Compact relay module for direct control of loads via the DALI bus according to IEC 62386 part 208
- Powerful relay suitable for loads with high inrush current such as LED luminaires
- Adjustable switch-on level after bus voltage is removed
- The switching thresholds of the relay can be easily adjusted via the DALI bus
- One DALI bus device and can be addressed accordingly according to 62386 part 102
- Power supply via the DALI bus
- Simple installation in commercially available flush-mounted boxes



Technical data

	SU 1 DALI-2
Stand-by consumption	ca. 10 mA
Switching capacity	13 A at 250 V AC, $\cos \varphi = 1$
Incandescent/halogen lamp load	1500 W
Inrush current	max. 500 A / 200 μ s
LED lamp < 2 W	30 W

	SU 1 DALI-2
LED lamp 2-8 W	350 W
LED lamp > 8 W	350 W
Protection class	II
Type of protection	IP 20

Subject to technical changes and misprints

additional information at: www.theben.de/product/4940091


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

SU 1 DALI-2

Item no.: 4940091

theben

Scale drawings

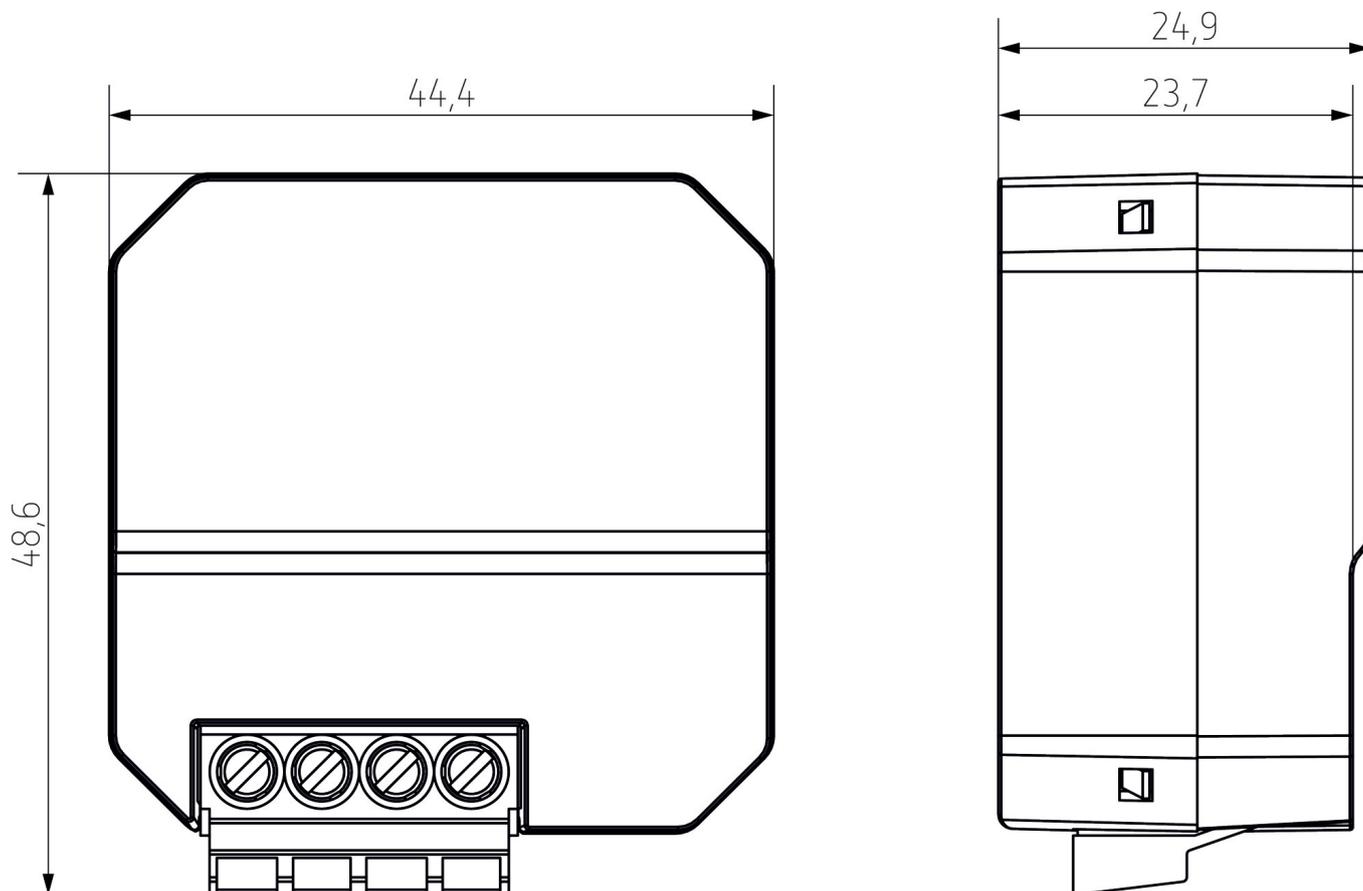

Subject to technical changes and misprints

additional information at: www.theben.de/product/4940091

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.