

# OKTO S22-230

Item no.: 3120122

**theben**

Time and light control  
Latching relay

## Description

- Electro-mechanical latching relay with 2 channels/contacts (normally open contact)
- Comfortable lighting control of one common consumer with several push-buttons possible
- Simple and inexpensive electrical installation with 2 wires per push-button
- Operation via integrated manual switch possible
- Potential-free with SELV
- Electrically safe all-pole disconnection
- LED switching load up to 200 W
- No closed-circuit current consumption



Subject to technical changes and misprints

additional information at: [www.theben.de/product/3120122](http://www.theben.de/product/3120122)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# OKTO S22-230


Item no.: 3120122

## Technical data


OKTO S22-230	
Operating voltage	230 V AC
Frequency	50 Hz
Width	1 modules
Installation type	DIN rail
Glow lamp load	3 mA
Type of contact	NO contact
Incandescent/halogen lamp load	1800 W
LED lamp 2-8 W	200 W

OKTO S22-230	
LED lamp > 8 W	200 W
Switching capacity	16 A at 230 V AC, $\cos \varphi = 1$
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Ambient temperature	-25°C ... 60°C
Protection class	II
Type of protection	IP 20

## Connection example

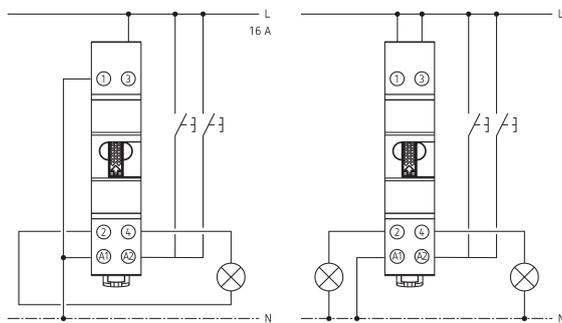

## Scale drawings

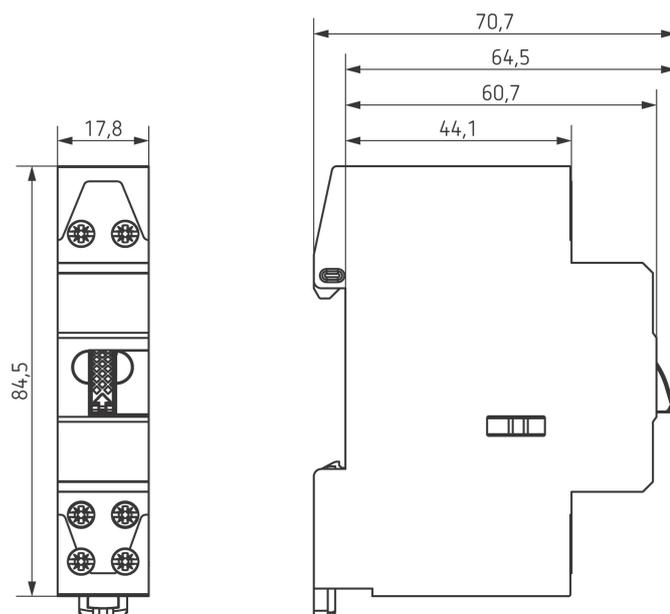

Subject to technical changes and misprints

additional information at: [www.theben.de/product/3120122](http://www.theben.de/product/3120122)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.