

LUXORliving RF1

Item no.: 4800868



Smart Home
Flush-mounted actuators

Description

- Connects LUXORliving RF devices of a radio line with the twisted-pair bus
- Power supply via KNX bus voltage
- Supports long frames for "KNX Secure" and enables faster download of large applications in parallel
- Ranges of max. 30 m within the building are possible
- Has a repeater function, i.e. received telegrams are sent again to increase the range
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>




Technical data

LUXORliving RF1	
Operating voltage KNX	≤ 4 mA
Installation type	Flush-mounted

LUXORliving RF1	
Ambient temperature	-5°C ... 45°C
Protection class	III

Connection example



Subject to technical changes and misprints

additional information at: www.theben.de/product/4800868


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXORliving RF1

Item no.: 4800868

theben

Scale drawings

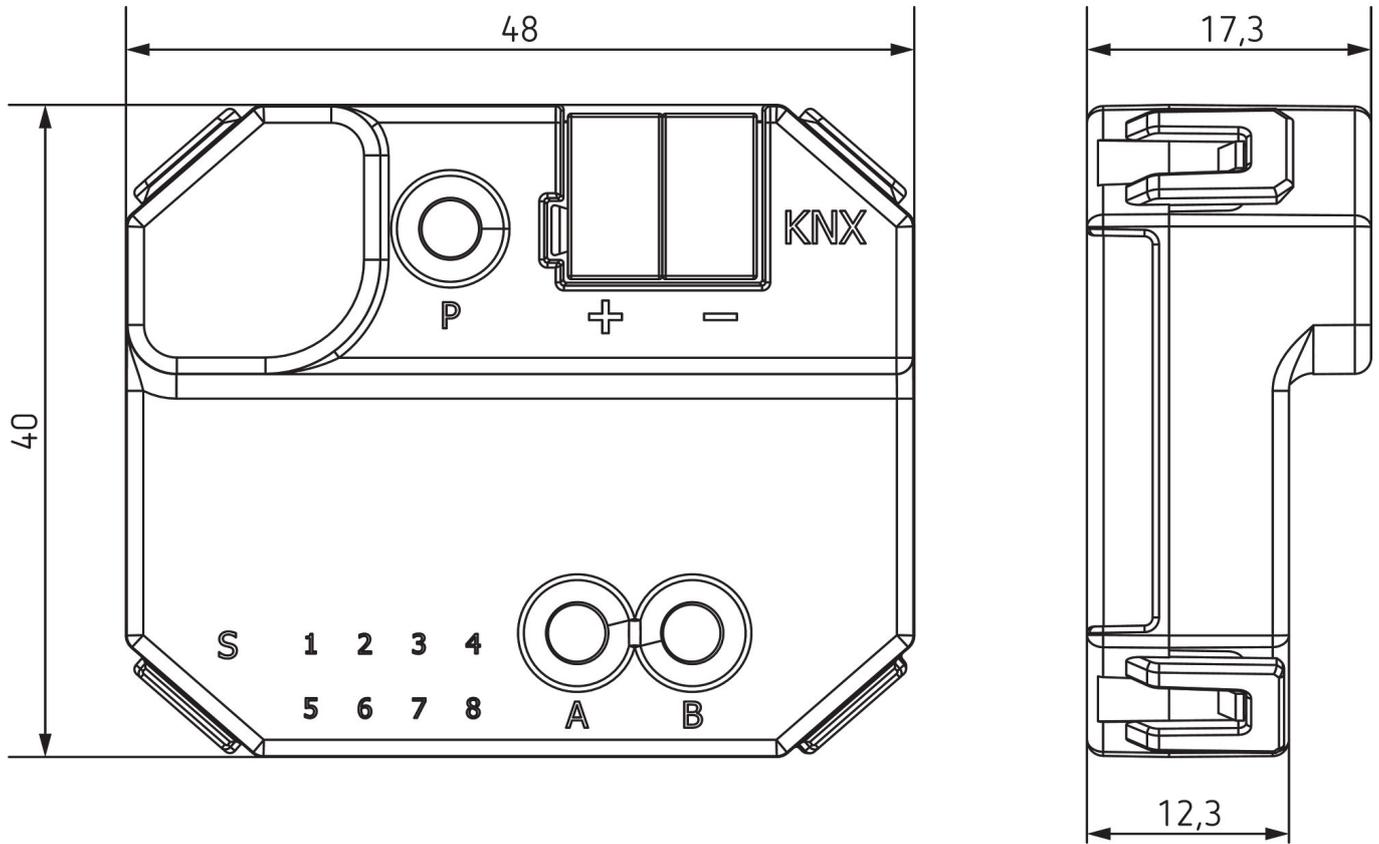

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800868

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025

Page 2 of 2