

LUXORliving H6 24V

Item no.: 4800441



Smart Home
HVAC controller

Description

- LUXORliving heating actuator for controlling thermal actuators
- Option of channel-based actuator control: 24 V DC switching or 0–10 V DC continuous
- Integrated relay for demand-based control of heating circuit pump
- Each channel has a temperature control
- Can be installed directly in the heating circuit distributor
- Screwless terminal technology
- Integrated power supply for max. 12 thermal actuators
- Continuous or switching actuating value can be selected
- Integrated valve protection - Manual operation on device
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>




Technical data

LUXORliving H6 24V	
Operating voltage KNX	<10 mA
Operating voltage	230 V AC - 240 V AC, 50 Hz - 60 Hz
Frequency	50 - 60 Hz
Stand-by consumption	<1 W
Number of channels	6

LUXORliving H6 24V	
Switching output	5 A, 240 V AC potenzialfrei (Pumpe)
Ambient temperature	-5°C ... 50°C
Type of protection	IP 20
Protection class	II according to EN 60 669

Connection example

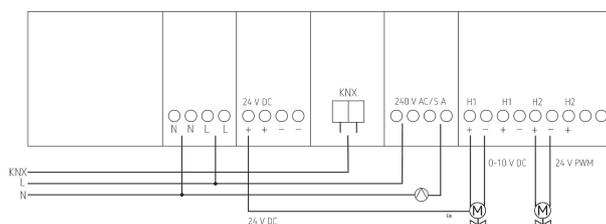

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800441


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXORliving H6 24V

Item no.: 4800441

theben

Scale drawings

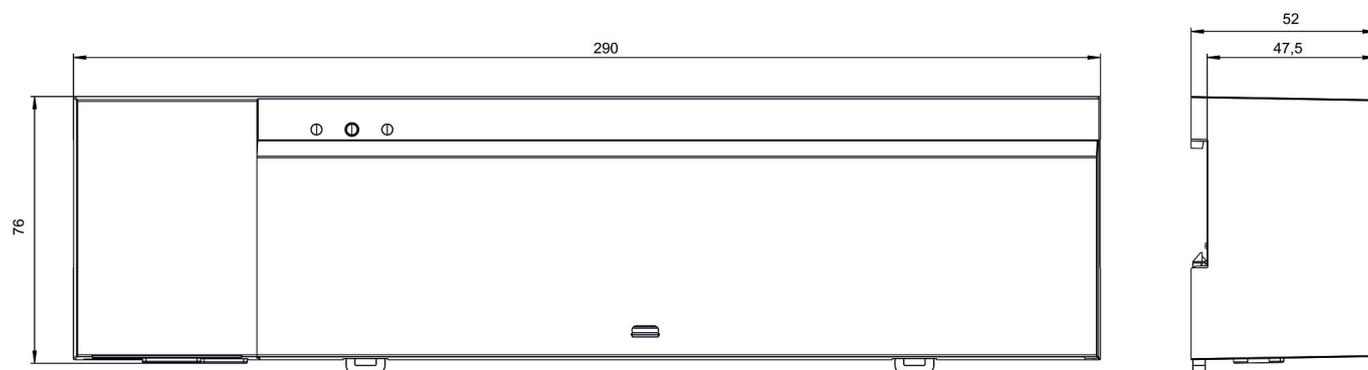

Accessories

Actuator ALPHA 5 24 V

Item no.: 9070442



Subject to technical changes and misprints

additional information at: www.theben.de/product/4800441

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025

Page 2 of 2