

theRonda S360 Slave UP WH

Item no.: 2080530

theben

Presence and motion detectors
Ceiling installation indoor

Description

- Passive infra-red presence detector for flush-mounted ceiling installation
- Circular detection area 360°, up to Ø 8 m (50 m²) at mounting height 3 m
- Slave version for theRonda master presence detectors
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- Service remote control theSenda P, management remote control theSenda B (optional)



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080530

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda S360 Slave UP WH

Item no.: 2080530


theben

Technical data

theRonda S360 Slave UP WH	
Operating voltage	110 V AC - 230 V AC
Frequency	50 - 60 Hz
Installation height	2 - 4 m
Minimum height	1.7 m
Installation type	Ceiling installation, Indoor, Flush-mounted
Colour	White
Switching output	Slave
Power consumption	~0.1 W

theRonda S360 Slave UP WH	
Light measurement	Mixed light measurement
Type of connection	Screw terminals
Max. cable cross section	max. 2 x 2,5 mm ²
Size of concealed housing	55 mm
Detection range	50 m ² (ø 8 m 360°)
Detection angle	360°
Ambient temperature	-15°C ... 50°C
Type of protection	IP 54 (when fitted)

Connection example

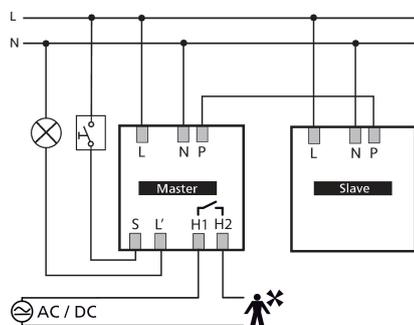

Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Sitting (S)	Diagonally (T)	Head on to (R)
2 m	5 m ² 2.5 m	38 m ² 7 m	5 m ² 2.5 m ²
2.5 m	7 m ² 3 m	38 m ² 7 m	7 m ² 3 m
3 m	13 m ² 4 m	50 m ² 8 m	13 m ² 4 m
3.5 m	13 m ² 4 m	50 m ² 8 m	13 m ² 4 m
4 m	13 m ² 4 m	64 m ² 9 m	13 m ² 4 m

Subject to technical changes and misprints

additional information at: www.theben.de/product/2080530


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda S360 Slave UP WH

Item no.: 2080530

theben

Detection range for planning applications at a temperature of 21 °C

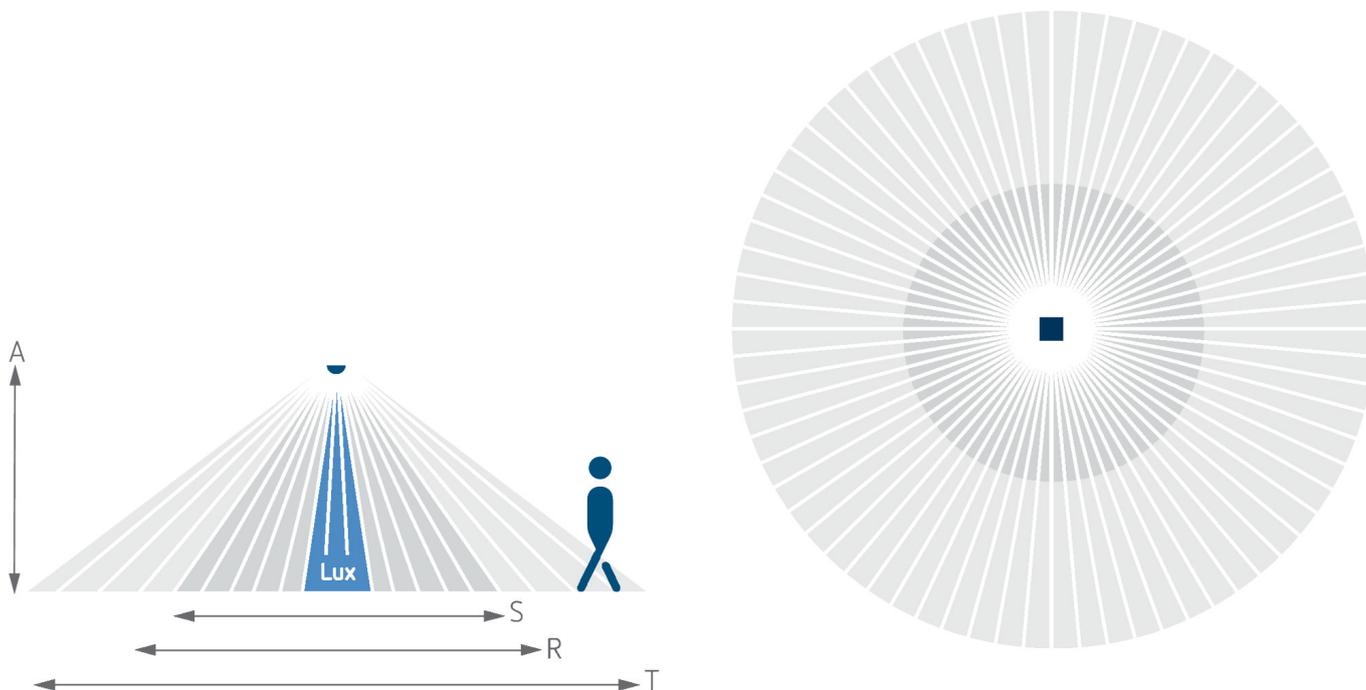

Detection range according to Sensnorm IEC 63180

Mounting height (A)	Diagonally (T)	Head on to (R)	Sitting (S)
2.5 m	50 m ² 8 m	28 m ² 6 m	20 m ² 5 m
4 m	79 m ² 10 m	71 m ² 9.5 m	

Subject to technical changes and misprints


additional information at: www.theben.de/product/2080530

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda S360 Slave UP WH

Item no.: 2080530

Scale drawings

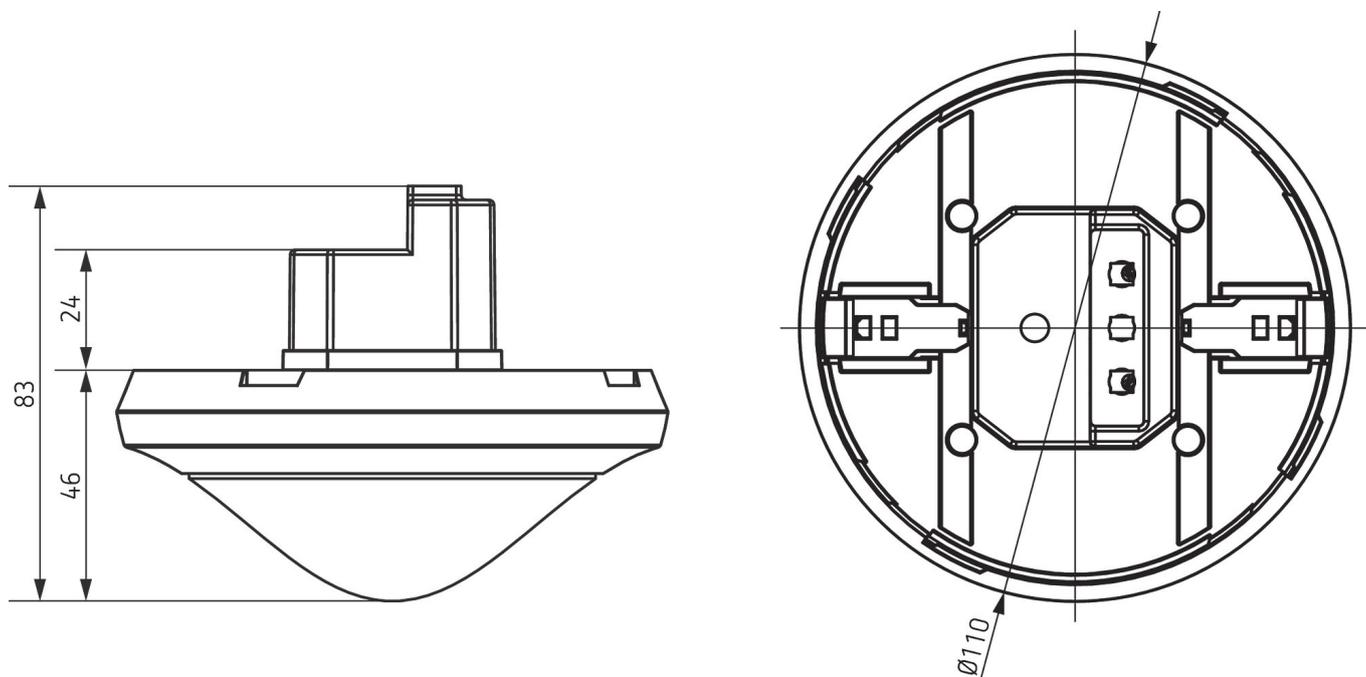

Accessories

theSenda P
Item no.: 9070910



Surface frame 110A GR
Item no.: 9070913




Surface frame 110A WH
Item no.: 9070912



Masking clip
Item no.: 9070921



QuickSafe
Item no.: 9070531



theSenda B
Item no.: 9070985



Cover 110 GR
Item no.: 9070591



Ceiling installation box 68A
Item no.: 9070992



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080530

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

theRonda S360 Slave UP WH

Item no.: 2080530

theben

Accessories

Surface frame 110A BK

Item no.: 9070600



Cover 110 BK

Item no.: 9070851



Subject to technical changes and misprints

additional information at: www.theben.de/product/2080530

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 5 of 5