

LUXORliving B6

Item no.: 4800430

theben

Smart Home
Binary inputs

Description

- 6-way binary input LUXORliving
- 6 floating universal and wide-range voltage inputs (10-240 V AC/DC or internally generated auxiliary voltage of approx. 12 V DC)
- Software functions: Switch/push-button, dimming, blinds
- LED switching status display for each channel
- Manual operation on device
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>



Technical data

LUXORliving B6	
Operating voltage	110 - 240 V AC
Stand-by consumption	<0.3 W
Width	4 modules
Installation type	DIN rail
Output	12 V DC/18 mA, SELV

LUXORliving B6	
Display	6 LEDs zur Anzeige des Zustandes am Eingang
Suitable for SELV	Yes, if all inputs are connected with SELV
Type of protection	IP 20
Protection class	II according to EN 60 730-1

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800430


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXORliving B6


Item no.: 4800430



Connection example

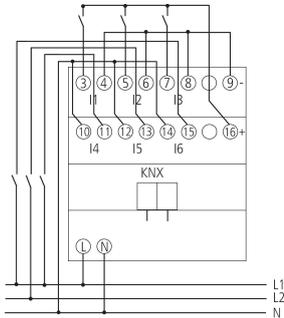

Scale drawings

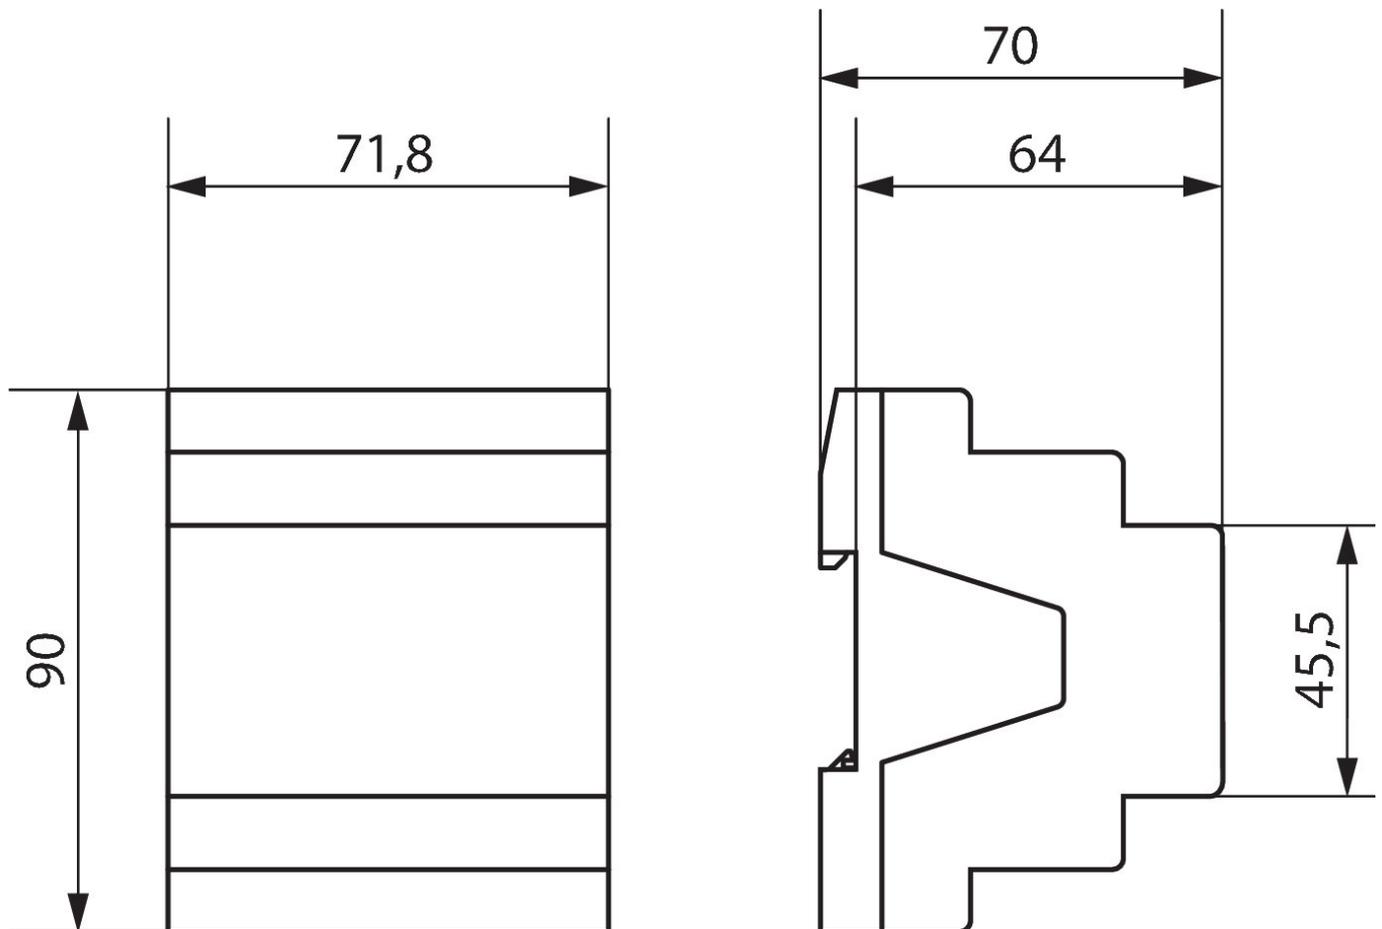

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800430

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.