

TR 608 top2 S

Item no.: 6080101

theben

Time and light control
Digital time switches

Description

- Digital time switch with weekly program
- 1 channel
- 56 memory locations
- DuoFix spring terminals
- For 2 conductors each
- Wire or strand (with or without wire end sleeve)
- Wire diameter: 0.5 - 2.5 mm²
- Button for releasing plug-in connection
- Text-oriented user guidance in display
- Preset date and time
- fully operable without mains connection
- Interface for OBELISK top2 memory card (PC programming)
- 2. insertable switching program
- Copying programs
- Storing programs
- 10 year power reserve (lithium battery)
- ON-OFF switching times
- Switching preselection
- Permanent switching ON/OFF
- Integrated operating hour counter
- Reset option
- Service function for monitoring maintenance intervals
- Holiday program
- Permanent switching ON/OFF
- PIN coding
- Automatic summer/winter time changeover
- can be deactivated
- Date rule options are already stored for Europe, the USA and other countries
- own date rule options or changeover around set dates are available



Subject to technical changes and misprints

additional information at: www.theben.de/product/6080101

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

TR 608 top2 S


Item no.: 6080101

theben

Technical data

TR 608 top2 S		TR 608 top2 S	
Operating voltage	230 - 240 V AC	Fluorescent lamp load (conventional) not corrected	1000 W
Frequency	50 - 60 Hz	Fluorescent lamp load (conventional) series-corrected	1000 W
Width	1 modules	Fluorescent lamp load (conventional) parallel-corrected	80 W 12 μ F
Installation type	DIN rail	Switching capacity min.	~10 mA
Type of contact	Changeover contact	Shortest switching times	1 min
Switching output	Phase-independent	Time accuracy at 25 °C	typical \pm 0,25 s/day (quartz)
Opening width	< 3 mm (μ)	Time basis	Quartz
Program	Weekly program	Stand-by consumption	~0.41 W
Program functions	ON-OFF	Memory card supplied	-
Number of channels	1	Type of connection	DuoFix spring terminals
Number of memory locations	56	Display	LCD
Power reserve	10 years	Keyboards	4 touch buttons, 1 reset button
Switching capacity at 250 V AC, $\cos \varphi = 1$	16 A	Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic
Switching capacity at 250 V AC, $\cos \varphi = 0,6$	4 A	Type of protection	IP 20
Incandescent/halogen lamp load	1000 W	Protection class	II according to EN 60 730-1
Energy saving lamps	30 W	Voltage	230 V AC
LED lamp < 2 W	6 W	Ambient temperature	-25°C ... 55°C
LED lamp 2-8 W	60 W		
LED lamp > 8 W	60 W		

Connection example

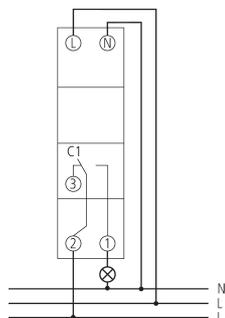

Subject to technical changes and misprints

additional information at: www.theben.de/product/6080101

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025


Page 2 of 3

TR 608 top2 S

Item no.: 6080101

theben

Scale drawings

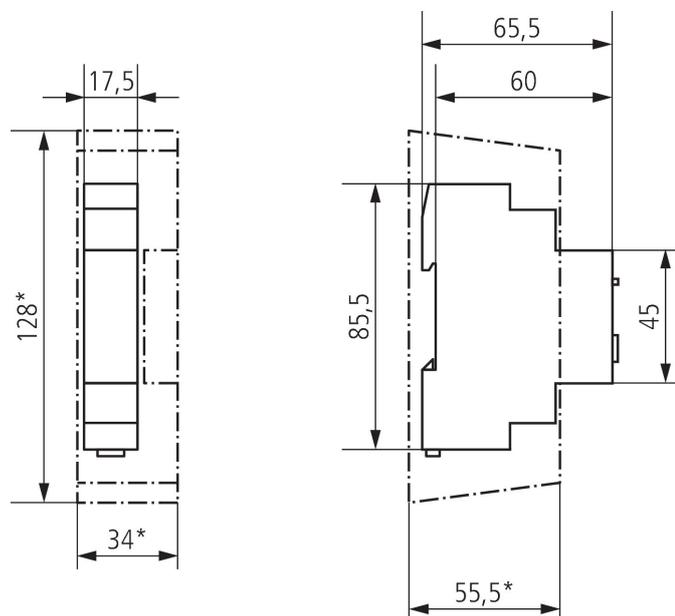

Accessories

Wall mounting kit 17,5 mm

Item no.: 9070065



PC set OBELISK top2/3

Item no.: 9070409



Memory card OBELISK top2

Item no.: 9070404



Subject to technical changes and misprints

additional information at: www.theben.de/product/6080101

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

07/04/2025

Page 3 of 3