

Time and light control
Analogue time switches

Description

- Analogue time switch
- 60 minute program
- 1 channel
- Without power reserve
- Synchronised with mains
- Tappets
- Shortest switching time: 75 seconds
- Switching preselection
- Switching status display
- 6 tappets included in delivery



Technical data

	TM 179 h
Operating voltage	230 V AC
Frequency	50 Hz
Number of channels	1
Installation type	Front panel installation/wall installation
Type of connection	Screw terminals
Drive	Synchronous motor
Program	60 minutes program
Switching capacity at 250 V AC, $\cos \varphi = 1$	10 A

	TM 179 h
Switching capacity at 250 V AC, $\cos \varphi = 0,6$	2 A
Shortest switching times	1.25 min
Programmable every	18.5 s
Time accuracy at 25 °C	Synchronised with mains
Type of contact	Changeover contact
Switching output	Potential-free and phase-independent
Stand-by consumption	0.9 W
Test approval	EMV

Subject to technical changes and misprints


additional information at: www.theben.de/product/1790008

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.


Technical data

TM 179 h		TM 179 h	
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic	Protection class	II according to EN 60 730-1
Type of protection	IP 20	Ambient temperature	-10°C ... 55°C

Connection example

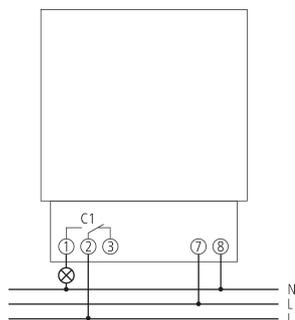

Scale drawings

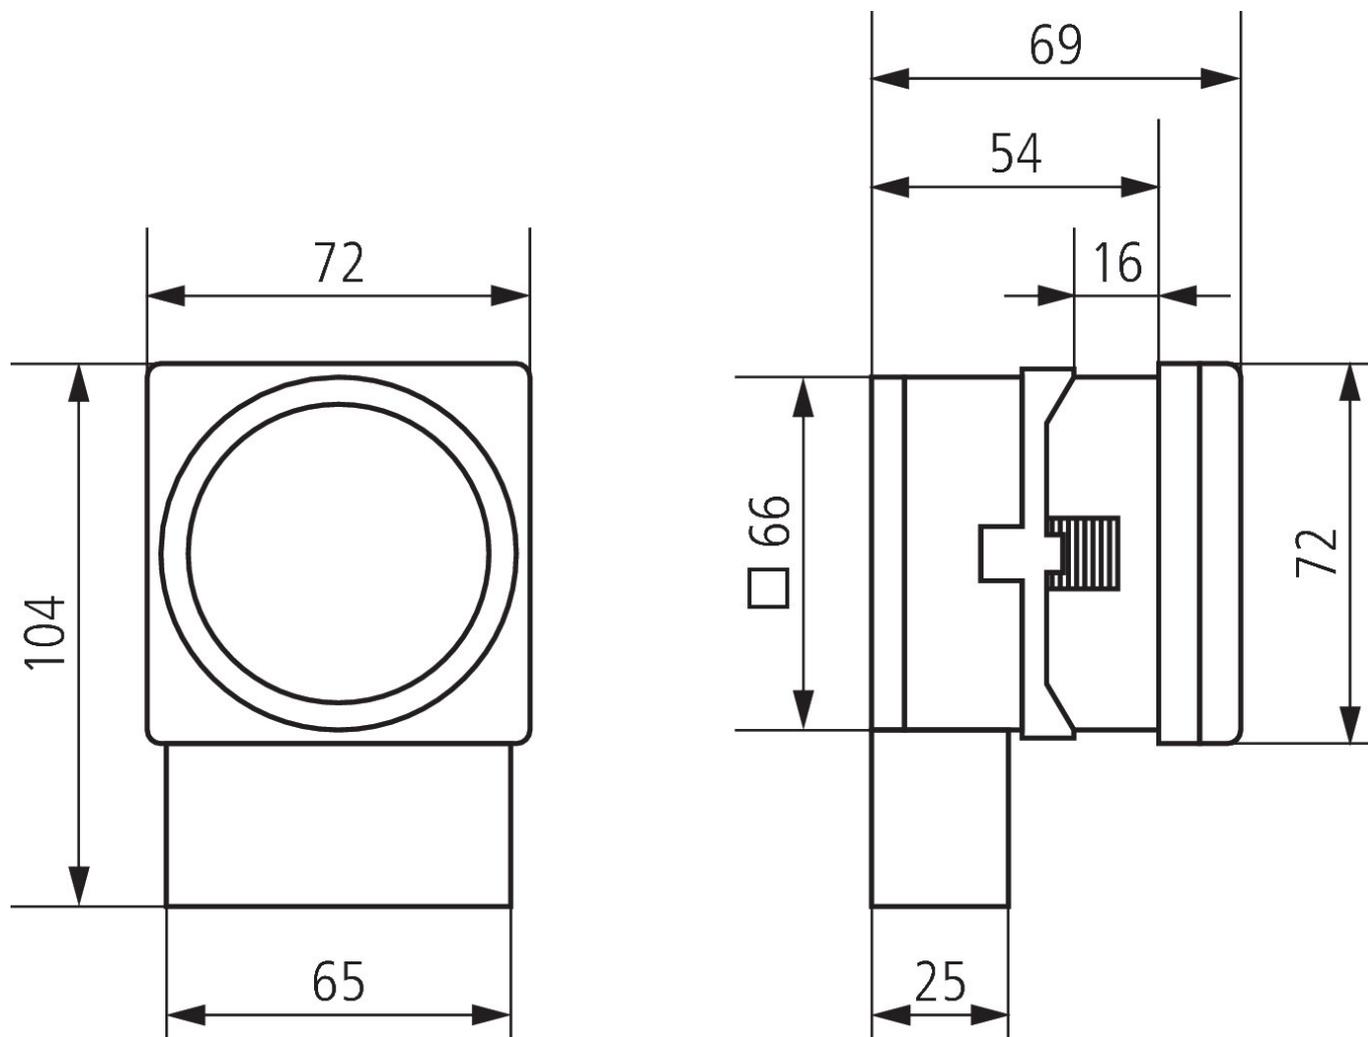

Accessories

Snap-on mounting 72 x 72
Item no.: 9070071

