

Time and light control
Analogue time switches

Description

- Analogue time switch with daily or weekly program (switching disc can be turned)
- 2 channels
- With power reserve (NiMH rechargeable battery)
- Quartz controlled
- 49 tappets included in delivery
- Tappets
- Shortest switching time: 20 minutes or 2 hours
- Clock hands for time display
- Switching status display



Technical data

SUL 289 g	
Operating voltage	230 V AC
Frequency	50 - 60 Hz
Number of channels	2
Installation type	Front panel installation/wall installation
Type of connection	Screw terminals
Drive	Quartz-controlled stepper motor
Program	Daily program, Weekly program
Power reserve	3 days full power reserve approx. 3 days after connection to operating voltage

SUL 289 g	
Switching capacity at 250 V AC, $\cos \varphi = 1$	10 A
Switching capacity at 250 V AC, $\cos \varphi = 0,6$	2 A
Shortest switching times	20, 2 min
Programmable every	5, 30 min
Time accuracy at 25 °C	$\leq \pm 1$ s/day (quartz)
Type of contact	Changeover contact
Switching output	Potential-free and phase-independent
Stand-by consumption	0.5 W

Subject to technical changes and misprints


additional information at: www.theben.de/product/2890033

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.


Technical data

SUL 289 g		SUL 289 g	
Housing and insulation material	High-temperature resistant, self-extinguishing thermoplastic	Protection class	II according to EN 60 730-1
Type of protection	IP 20	Ambient temperature	-10°C ... 55°C

Connection example



Scale drawings

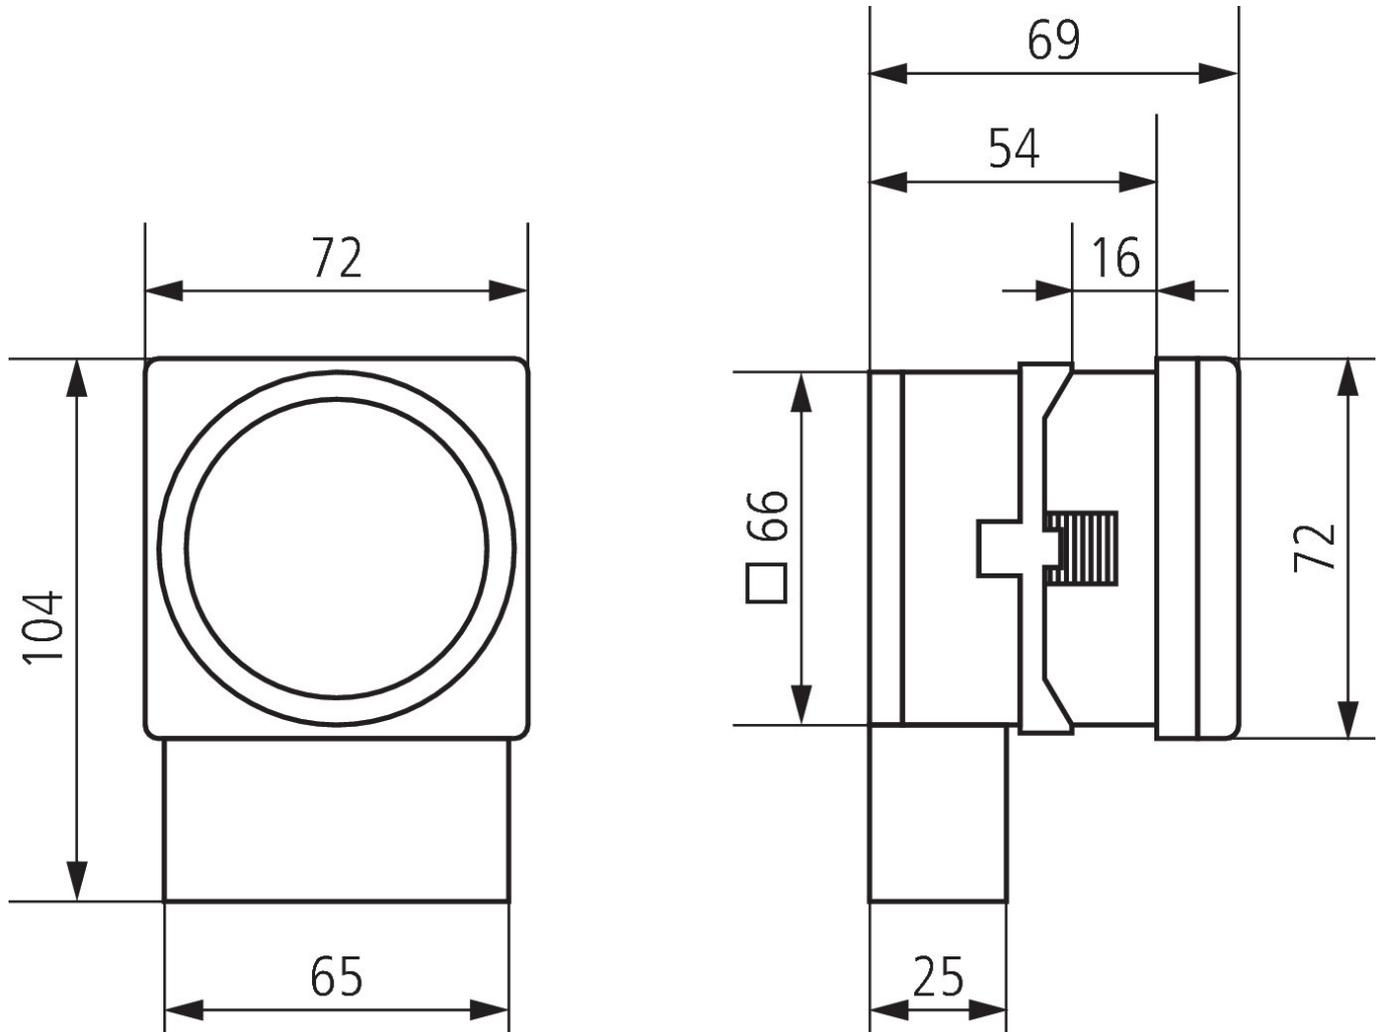

Accessories

Snap-on mounting 72 x 72
Item no.: 9070071



Subject to technical changes and misprints

additional information at: www.theben.de/product/2890033

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.