

thePrema S360 Slave E UP GR

Item no.: 2070631

theben

Presence and motion detectors
Ceiling installation indoor

Description

- Passive infra-red presence detector for flush-mounted ceiling installation
- Square detection area 360°
- Slave version for thePrema master presence detectors
- Ready for immediate use due to factory preset
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, management remote control SendaPro (optional)
- * According to warranty terms and conditions, see www.theben.de/en/guarantee



5 years
guarantee*



Subject to technical changes and misprints

additional information at: www.theben.de/product/2070631

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

thePrema S360 Slave E UP GR


Item no.: 2070631



Technical data

| thePrema S360 Slave E UP GR | | thePrema S360 Slave E UP GR | |
|-----------------------------|---------------------------------------------|-----------------------------|--------------------------------------------------------------------------|
| Operating voltage | 110 V AC - 230 V AC \pm 10 % | Lamp types | Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs |
| Frequency | 50 - 60 Hz | Type of connection | Screw terminals |
| Installation height | 2 - 3 m | Max. cable cross section | max. 2 x 2,5 mm ² |
| Minimum height | 1.7 m | Size of concealed housing | 55 mm |
| Installation type | Ceiling installation, Indoor, Flush-mounted | Detection range | 49 m ² (7,0 x 7,0 m) |
| Colour | Grey | Detection angle | 360° |
| Switching output | Slave | Ambient temperature | 0°C ... 50°C |
| Power consumption | ~0.1 W | Type of protection | IP 40 (when fitted) |
| Light measurement | Mixed light measurement | | |

Connection example

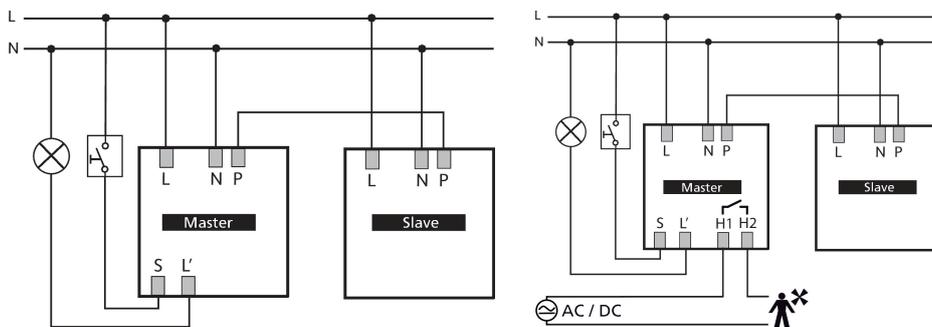

Detection range for planning applications at a temperature of 21 °C

| Mounting height (A) | Sitting (S) | Walking (T) |
|---------------------|--------------------------------------------------------------|-----------------------------------------------|
| 2 m | 9 m ² 3 m x 3 m | 20 m ² 4.5 m x 4.5 m \pm 0.5 m |
| 2.5 m | 16 m ² 4 m x 4 m | 36 m ² 6 m x 6 m \pm 0.5 m |
| 3 m | 25 m ² 5 m x 5 m, 25 m ² 5 m x 5 m | 49 m ² 7 m x 7 m \pm 1 m |
| 3.5 m | | 64 m ² 8 m x 8 m \pm 1 m |

Subject to technical changes and misprints

additional information at: www.theben.de/product/2070631


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

thePrema S360 Slave E UP GR

Item no.: 2070631

theben


Detection range for planning applications at a temperature of 21 °C

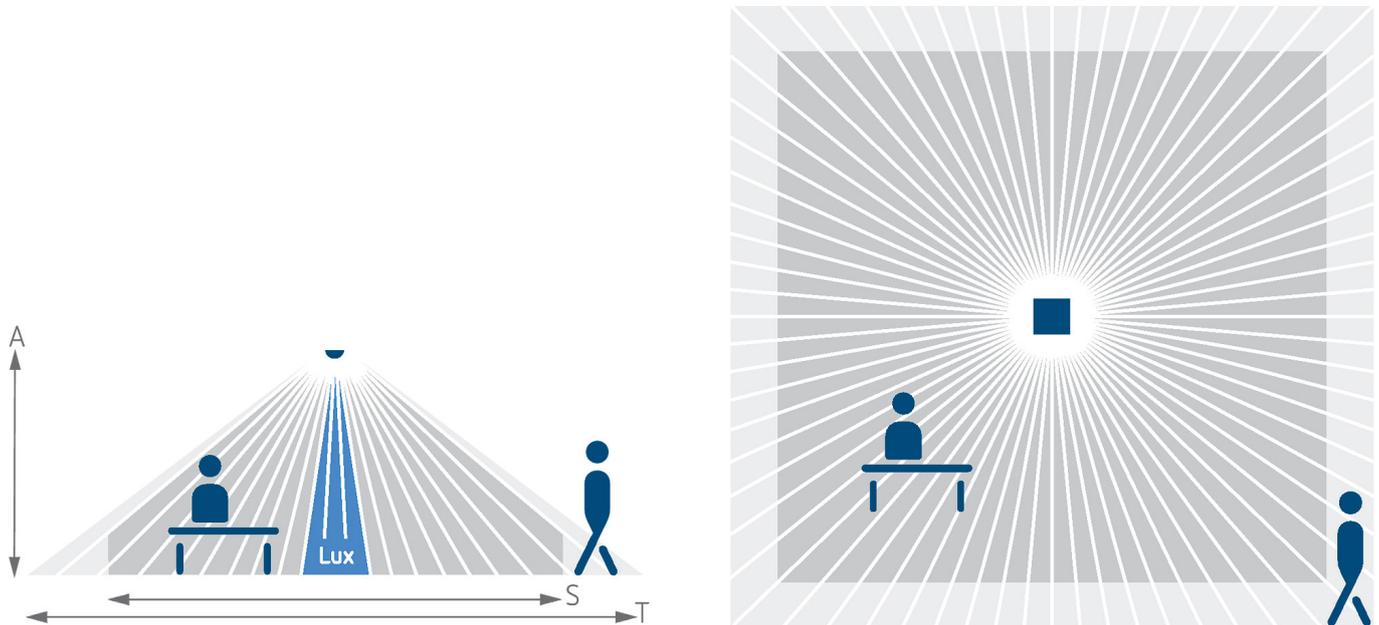

Detection range according to Sensnorm IEC 63180

| Mounting height (A) | Diagonally (T) | Head on to (R) | Sitting (S) |
|---------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| 2.5 m | 40 m ² 6.3 m x 6.3 m | 22 m ² 4.7 m x 4.7 m | 20 m ² 4.5 m x 4.5 m |

Scale drawings

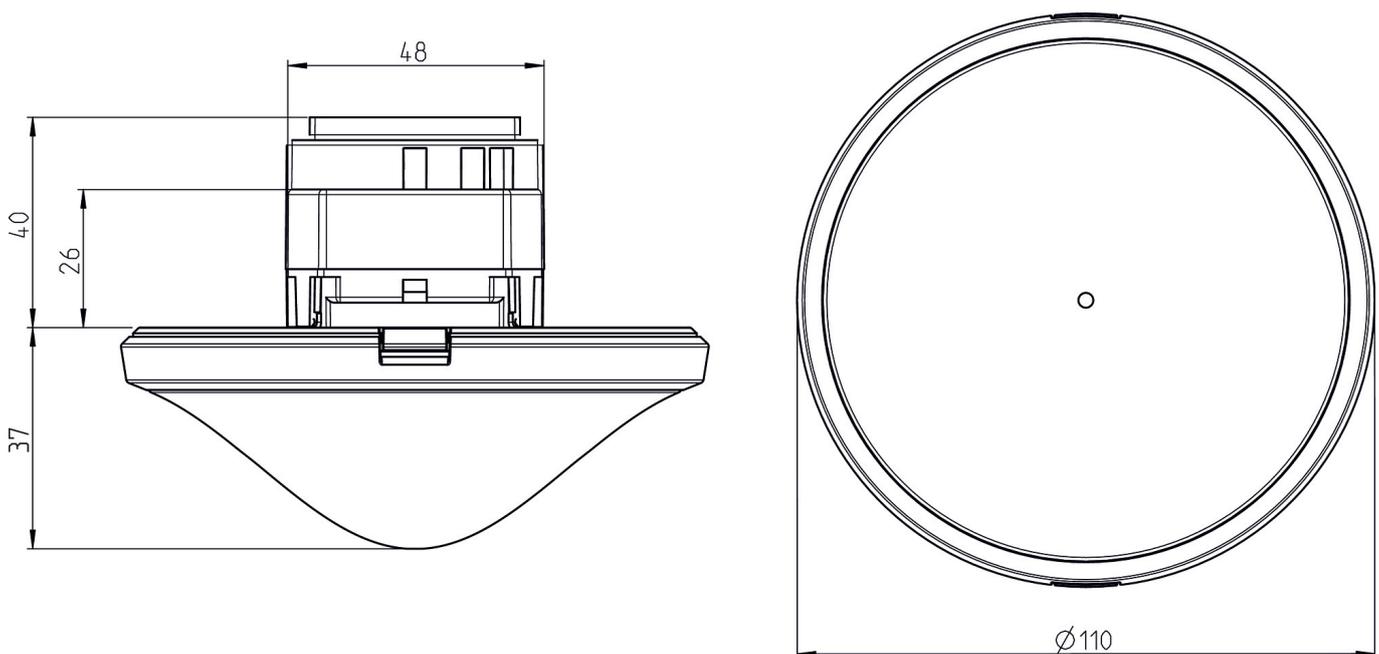

Subject to technical changes and misprints

additional information at: www.theben.de/product/2070631

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 3 of 4

thePrema S360 Slave E UP GR

Item no.: 2070631



Accessories

theSenda P

Item no.: 9070910



Surface frame 110A GR

Item no.: 9070913




Ceiling installation box 73A

Item no.: 9070917

QuickSafe

Item no.: 9070531

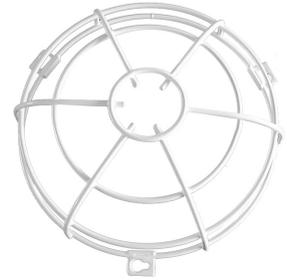

theSenda B

Item no.: 9070985



Ceiling installation box 68A

Item no.: 9070992



Subject to technical changes and misprints

additional information at: www.theben.de/product/2070631

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 4 of 4