

# thePrema P360 Slave E UP WH

Item no.: 2070130

**theben**

Presence and motion detectors  
Ceiling installation indoor

## Description

- Passive infra-red presence detector for flush-mounted ceiling installation
- Square detection area 360°
- Slave version for thePrema master presence detectors
- Ready for immediate use due to factory preset
- Test mode for checking function and detection area
- Extension of detection area via Master/Slave or Master/Master switching, a maximum of 10 detectors can be switched in parallel with each other
- Ceiling installation in flush-mounted socket
- Ceiling installation also possible with surface-mounted frame
- User remote control theSenda S, management remote control SendaPro (optional)
- \* According to warranty terms and conditions, see [www.theben.de/en/guarantee](http://www.theben.de/en/guarantee)



5 years  
guarantee\*



Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070130](http://www.theben.de/product/2070130)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# thePrema P360 Slave E UP WH


Item no.: 2070130



## Technical data

thePrema P360 Slave E UP WH		thePrema P360 Slave E UP WH	
Operating voltage	110 V AC - 230 V AC $\pm$ 10 %	Lamp types	Incandescent/halogen lamps, fluorescent lamps, Energy saving lamps, LEDs
Frequency	50 - 60 Hz	Type of connection	Screw terminals
Installation height	2 - 10 m	Max. cable cross section	max. 2 x 2,5 mm <sup>2</sup>
Minimum height	1.7 m	Size of concealed housing	55 mm
Installation type	Ceiling installation, Indoor, Flush-mounted	Detection range	81 m <sup>2</sup> (9,0 x 9,0 m)
Colour	White	Detection angle	360°
Switching output	Slave	Ambient temperature	0°C ... 50°C
Power consumption	~0.1 W	Type of protection	IP 40 (when fitted)
Light measurement	Mixed light measurement		

## Connection example

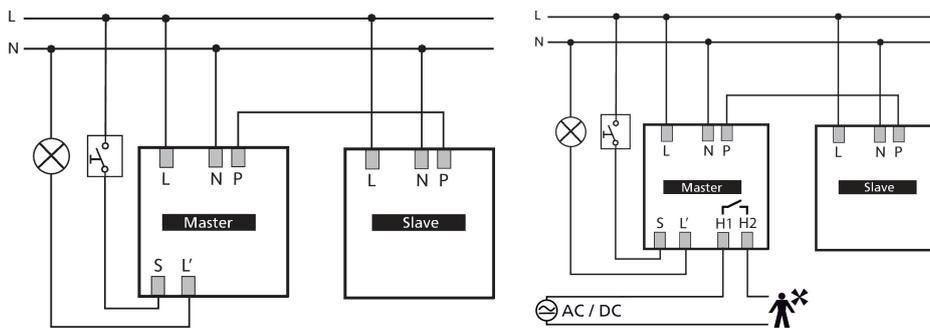

## Detection range for planning applications at a temperature of 21 °C

Mounting height (A)	Sitting (S)	Walking (T)
2 m	20 m <sup>2</sup>   4.5 m x 4.5 m	36 m <sup>2</sup>   6 m x 6 m $\pm$ 0.5 m
2.5 m	36 m <sup>2</sup>   6 m x 6 m	64 m <sup>2</sup>   8 m x 8 m
3 m	49 m <sup>2</sup>   7 m x 7 m, 81 m <sup>2</sup>   9 m x 9 m $\pm$ 1 m	81 m <sup>2</sup>   9 m x 9 m $\pm$ 0.5 m
3.5 m	64 m <sup>2</sup>   8 m x 8 m	100 m <sup>2</sup>   10 m x 10 m $\pm$ 1 m
5 m		144 m <sup>2</sup>   12 m x 12 m $\pm$ 1.5 m
10 m		400 m <sup>2</sup>   20 m x 20 m $\pm$ 2 m

Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070130](http://www.theben.de/product/2070130)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# thePrema P360 Slave E UP WH

Item no.: 2070130




Detection range for planning applications at a temperature of 21 °C

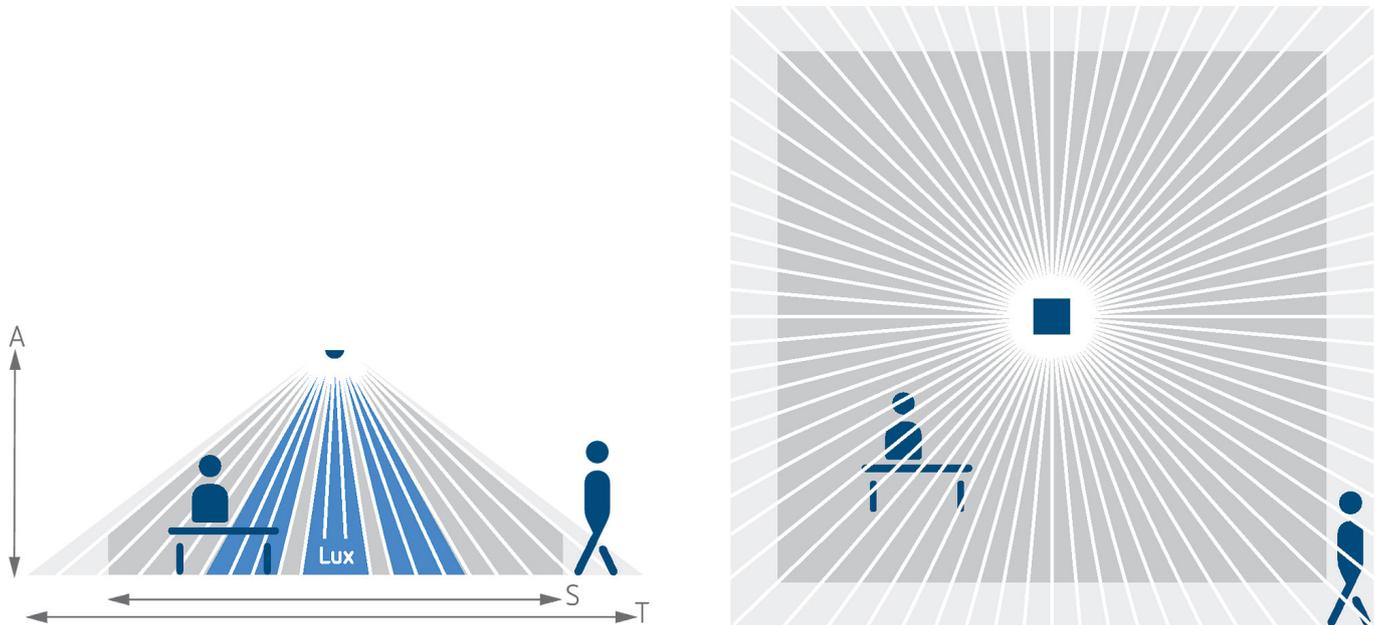

Detection range according to Sensnorm IEC 63180

Mounting height (A)	Diagonally (T)	Head on to (R)	Sitting (S)
2.5 m	77 m <sup>2</sup>   8.8 m x 8.8 m	64 m <sup>2</sup>   8 m x 8 m	42 m <sup>2</sup>   6.5 m x 6.5 m

Scale drawings

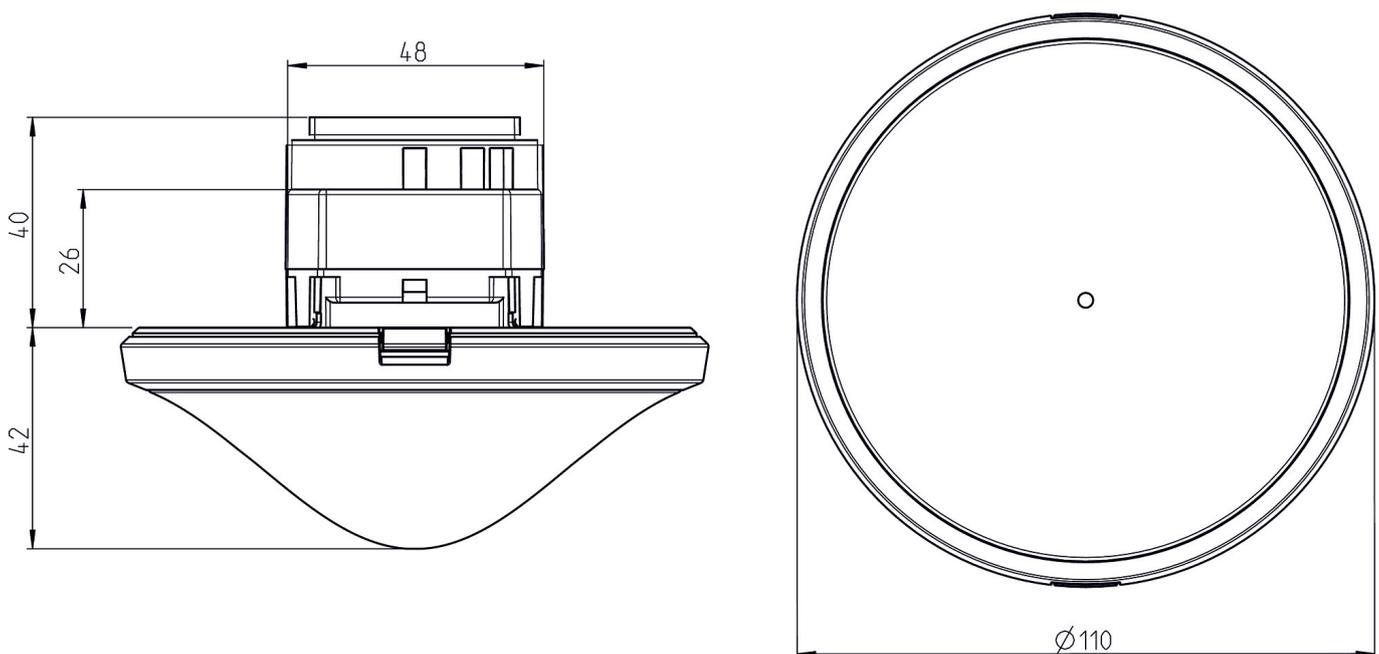

Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070130](http://www.theben.de/product/2070130)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

04/02/2026

Page 3 of 4

# thePrema P360 Slave E UP WH

Item no.: 2070130



## Accessories

### theSenda P

Item no.: 9070910



### Ceiling installation box 73A

Item no.: 9070917


### Surface frame 110A WH

Item no.: 9070912



### QuickSafe

Item no.: 9070531

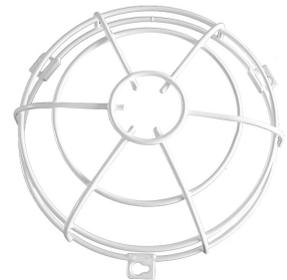

### theSenda B

Item no.: 9070985



### Ceiling installation box 68A

Item no.: 9070992



### Surface frame 110A BK

Item no.: 9070600



Subject to technical changes and misprints

additional information at: [www.theben.de/product/2070130](http://www.theben.de/product/2070130)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.