

JME 4 T 24V KNX

Item no.: 4930265



KNX

Actuators DIN rail and gateways

Description

- 4-way blind actuator 24V MIX2
- Extension module MIX2
- Can be upgraded to maximum of 12 channels
- For controlling 24V drives for blinds, shutters, sun and vision protection devices, skylights and ventilation flaps
- Up to 2 extension modules can be connected to a base module
- Up to two extension modules MIX or MIX2 can be connected to one base module
- Device and KNX bus module can be swapped independently of each other
- Removable KNX bus module enables devices to be changed without reprogramming
- Manual set-up and use of actuators is possible without KNX bus module
- Free combination of switches, dimming, blinds and heating control as well as binary inputs
- For controlling drives for blinds, shutters, sun and vision protection devices, skylights and ventilation flaps
- Manual operation on device (even without bus connection)
- LED Up and Down switching status display for each channel
- Potential-free contacts for Up and Down per channel
- Setting option for phase sequence and running time of deives
- Copy function for fast configuration



Technical data

JME 4 T 24V KNX	
Number of channels	4
Width	4 modules
Installation type	DIN rail
Type of connection	Screw terminals
Max. cable cross section	Solid wire: 0.5 mm ² (Ø 0.8) to 6 mm ² Stranded wire with end sleeve: 0.5 mm ² to 4 mm ²
Output	Changeover contact, 6 A

JME 4 T 24V KNX	
Switching capacity	6 A at 24 V DC
Switching output	Potential-free, for SELV, if the whole device switches SELV
Ambient temperature	-5°C ... 45°C
Type of protection	IP 20
Protection class	II according to EN 60 730-1

Subject to technical changes and misprints

additional information at: www.theben.de/product/4930265


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

JME 4 T 24V KNX


Item no.: 4930265



Connection example

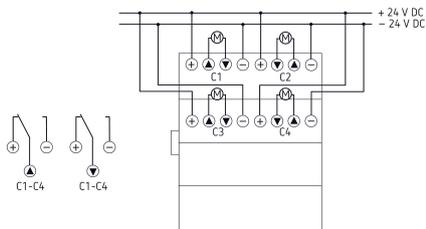

Scale drawings

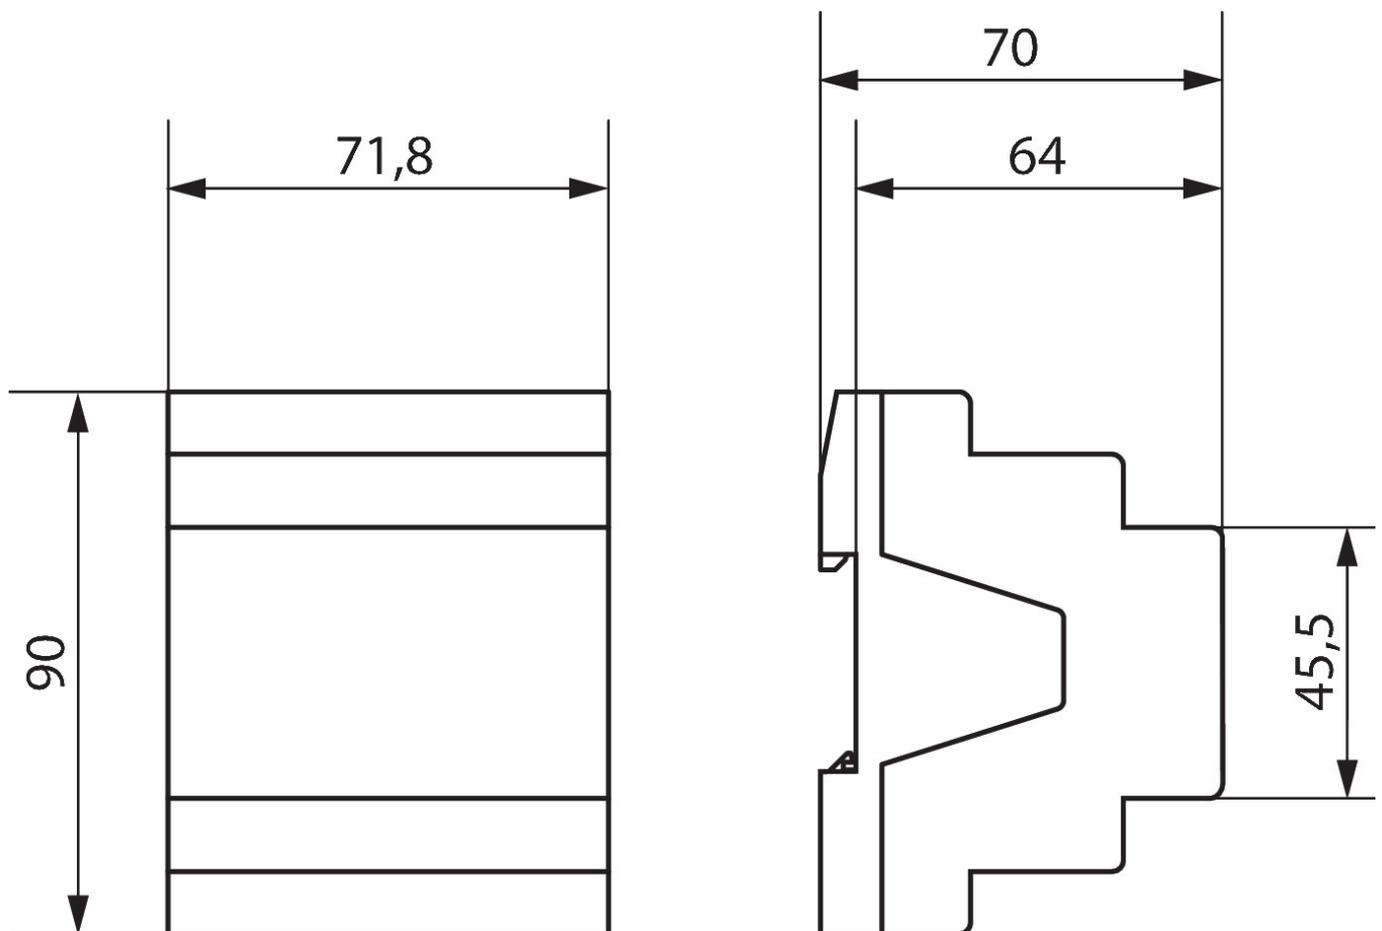

Subject to technical changes and misprints

additional information at: www.theben.de/product/4930265

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.