

NH4a gG 800A/500V

Drošinātājs



ETI kods:	004187207
Tips:	NH
Izmērs:	NH4a
Nominālā strāva:	800 A
Raksturlielumi:	gG
Indikators:	Viršutinis saugiklio būsēnos indikators
Nominālais maiņstrāvas spriegums:	500 V
Nominālais līdzstrāvas spriegums:	250 V
Atjungimo geba (AC) (kA):	120 kA
Jaudas izkliede (0,7xIn) (W):	26,8 W
Pd (W):	59,5 W
Darbības džoula integrālis(A2s):	10 500 000
Džoula integrālis (A2s):	3 300 000
Standarti:	IEC 60269-1, IEC 60269-2
Pieteikums:	For cable protection

Produkta tiešsaistes lapa 

Dokumenti



TEHNISKO DATU KATALOGS



LIETOŠANAS INSTRUKCIJA



DEKLARĀCIJA



2D FAILS



3D FAILS



EPLAN FAILS

ETIM

Rated switching capacity AC	120 kA
Voltage type	AC/DC
Fuse construction type according to IEC 60269	NH4a
Rated voltage AC	500 V
Power loss at rated current	59,5 W
Type of fuse status indicator	Top fuse status indicator
Rated current	800 A
Rated voltage DC	250 V
Utilization category	gG (cable protection/equipment protection)

Logistika
 Produkts

Svars	2 500 g
Net width	95 mm
Net height	200,1 mm
Net depth	121,1 mm
Stock unit of measure	pcs


Pamata iepakojums

Basic packaging quantity	1 pcs
EAN code for a basic packaging	3838400151650
Basic packaging weight	2,599 kg
Basic Packaging Dimensions Height	0,1 m
Basic Packaging Dimensions Width	0,212 m
Basic Packaging Dimensions Depth	0,152 m
Basic packaging volume	0,003 m³


Transporta iepakojums

Transport packaging quantity	4 pcs
EAN code for a transport packaging	3838400151667
Transport packaging weight	10,718 kg
Transport Packaging Dimensions Height	0,255 m
Transport Packaging Dimensions Width	0,365 m
Transport Packaging Dimensions Depth	0,25 m
Transport packaging volume	0,023 m³
Pallet quantity	144 pcs
Customs tariff	85361090

Dimension

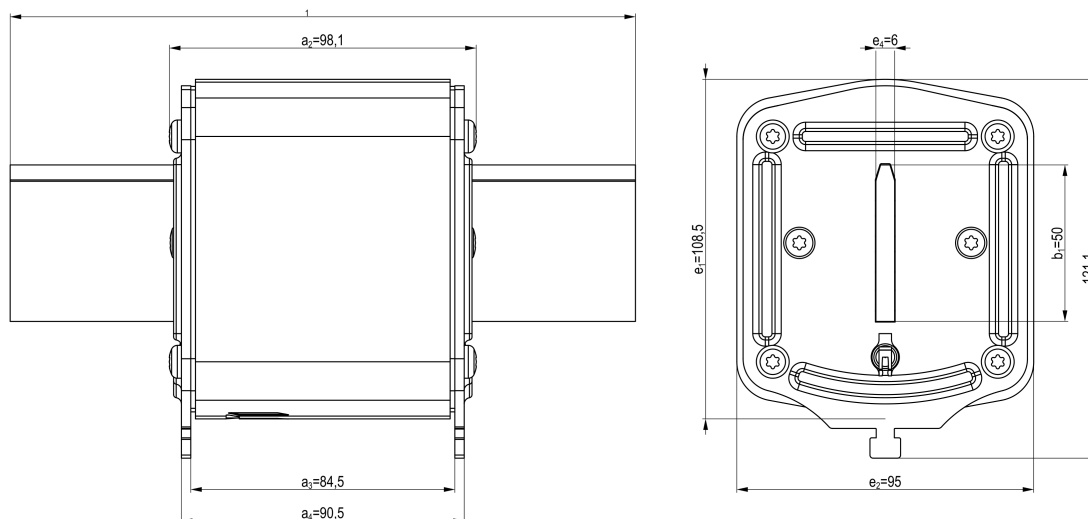

CutOff

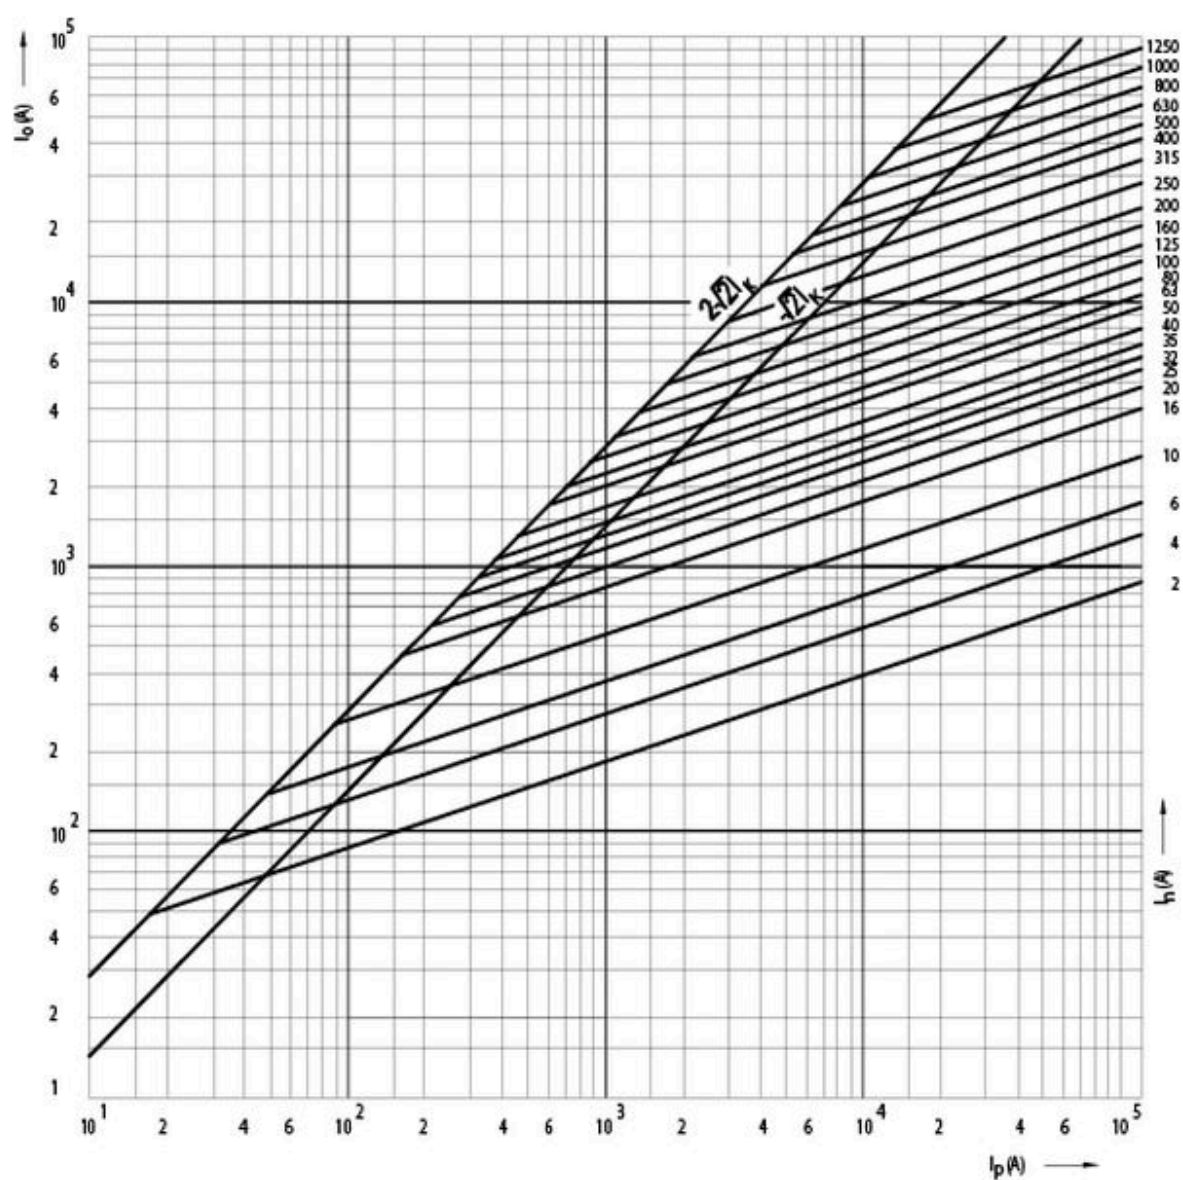

I/t characteristic

