



VVT-D3 24kV/25A

Fuse link

ETI Code:	004252010
Type description:	NEW VVT-D 80N Thermo striker
Fuse type:	NEW VVT-D 80N Thermo striker
Rated AC voltage:	24000 V
Size:	442
Rated current:	25 A
Indicator:	Temperature limiter, 80N striker force
Breaking capacity AC:	63 kA
Rated minimum breaking current:	87 A
Cold resistance:	59 mΩ
Power dissipation:	49 W

[Online product page](#) 

Documents



TECHNICAL DATA CATALOG



2D FILE



3D FILE



EPLAN FILE

ETIM

Performance category according to IEC 60282-1	Back-up
Voltage type	AC
Application	Other
With striker	✓
Installation technique	Air
Standard	IEC
Length	442 mm
Breaking capacity	63 kA
Diameter	53 mm
Rated voltage	24 kV
Rated current	25 A
Utilization category	Other
Rated frequency(Min)	45 Hz
Rated frequency(Max)	60 Hz

Logistics


Product

EAN code for a single product	3838895893172
Net weight of the product	2.4 kg
Net width	56 mm
Net height	508 mm
Net depth	56 mm
Stock unit of measure	pcs


Transport Packaging

Transport packaging quantity	3 pcs
EAN code for a transport packaging	3838895893189
Transport packaging weight	7.54 kg
Transport Packaging Dimensions Height	0.09 m
Transport Packaging Dimensions Width	0.56 m
Transport Packaging Dimensions Depth	0.28 m
Transport packaging volume	0.014 m³
Pallet quantity	78 pcs
Customs tariff	85351000

I/t characteristic

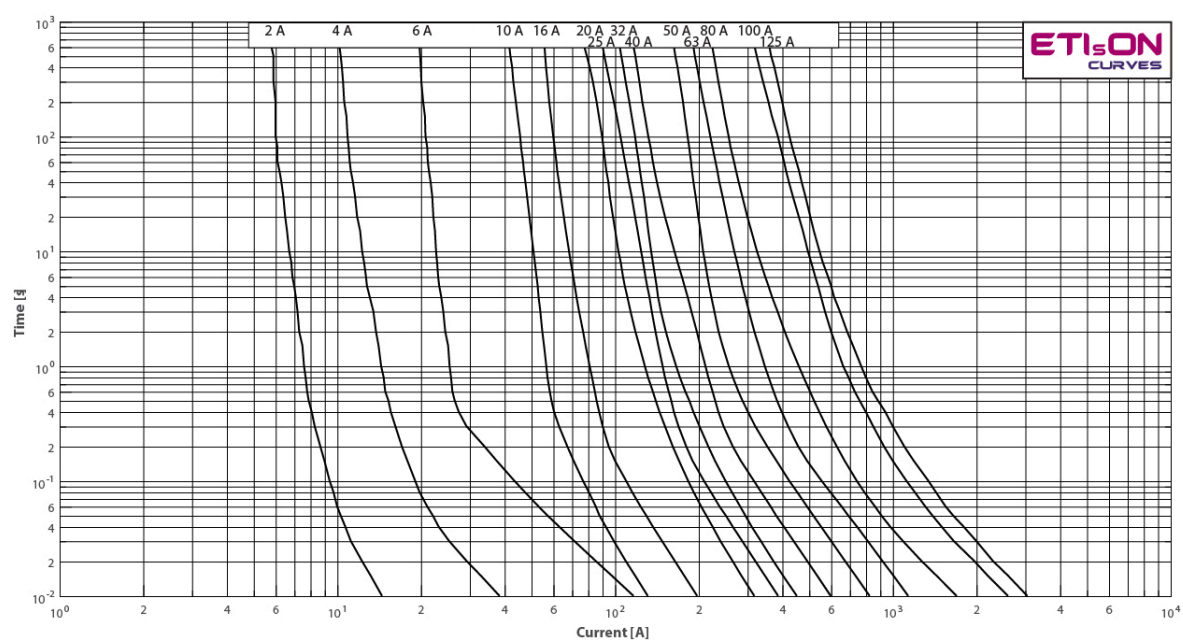

CutOff

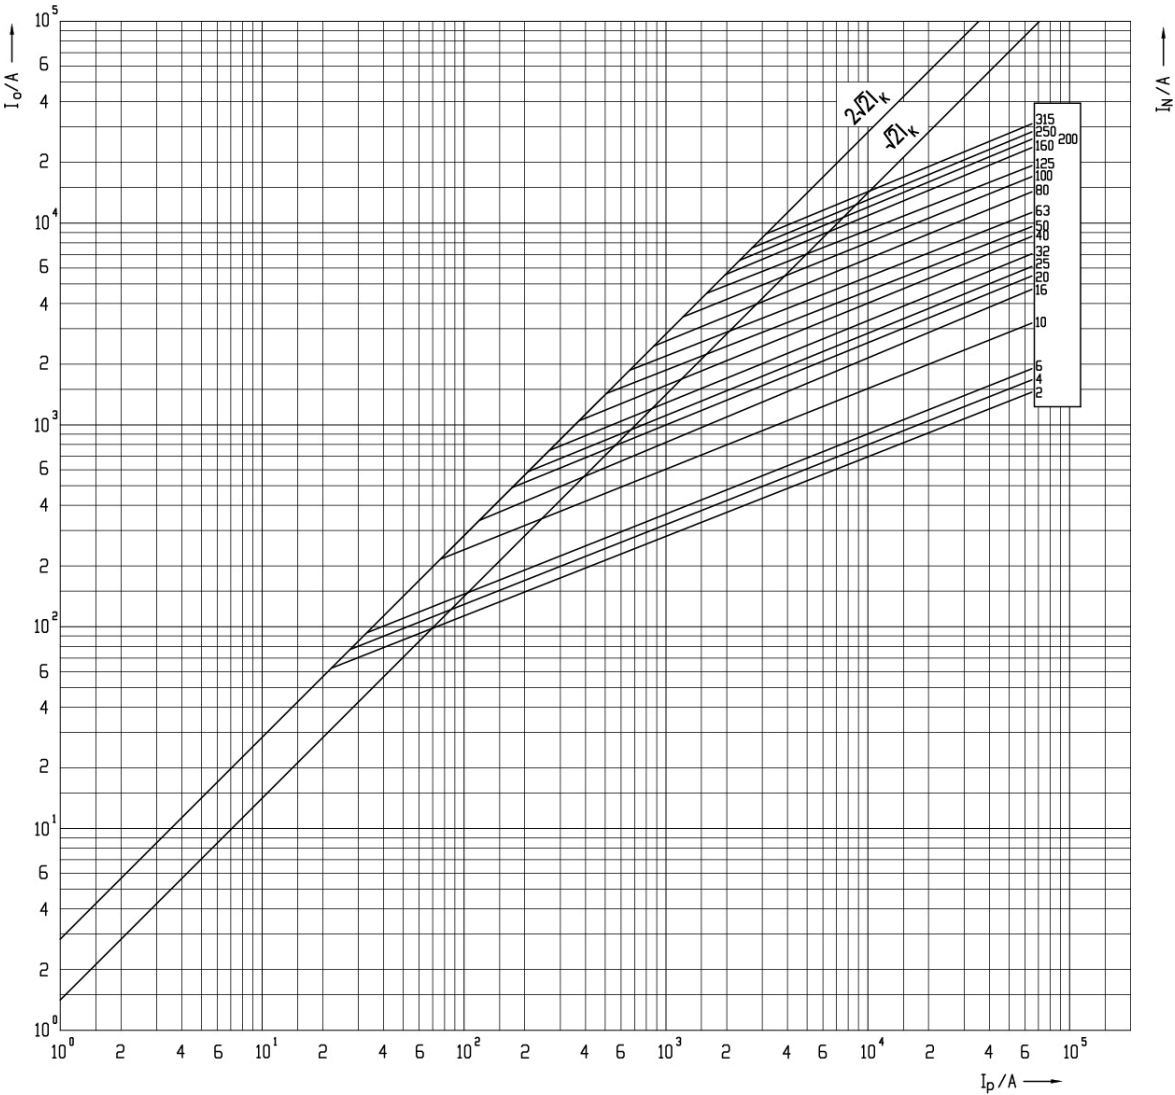

Dimension

