EFI-P4 A 63/0.1

RCCB



ETI Code:	002061523
Function:	RCCB
Catalogue group:	EFI-P4
Application:	IEC/EN 61008
Built-in depth:	68 mm
Rated residual operating current IDn:	0.1 A
Rated residual current:	0.1 A
Residual current type:	A
Rated current:	63 A
Depth:	68 mm
Type of installation:	DIN rail 35 mm
Number of poles:	3+N
Rated conditional short-circuit current Inc:	10 kA
Rated AC voltage:	400/415 V
Rated frequency:	50/60 Hz
Rated cross section:	1-25 mm²
Standards:	IEC/EN 61008
IP rating:	IP20

Online product page

Documents

TECHNICAL DATA CATALOG

INSTRUCTION MANUAL

CE DECLARATION

CERTIFICATE

2D FILE

3D FILE

WHITE PAPER

EPLAN FILE

ETIM

Additional equipment possible	✓
Built-in depth	**68 mm**
Leakage current type	**A**
Surge current capacity	**0.4 kA**
Degree of protection (IP)	**IP20**
Mounting method	**DIN rail**
Rated fault current	**0.1 A**
Frequency	**50/60 Hz**
Number of poles	**4**
Short-circuit breaking capacity (Icw)	**10 kA**
Rated voltage	**415 V**
Rated current	**63 A**
Width in number of modular spacings	**4**
Connectable conductor cross section multi-wired(Min)	**1 mm²**
Connectable conductor cross section multi-wired(Max)	**25 mm²**

Logistics

Product

Net weight of the product	**290 g**
Net width	**71.8 mm**
Net height	**87.5 mm**
Net depth	**72.86 mm**
Stock unit of measure	**pcs**

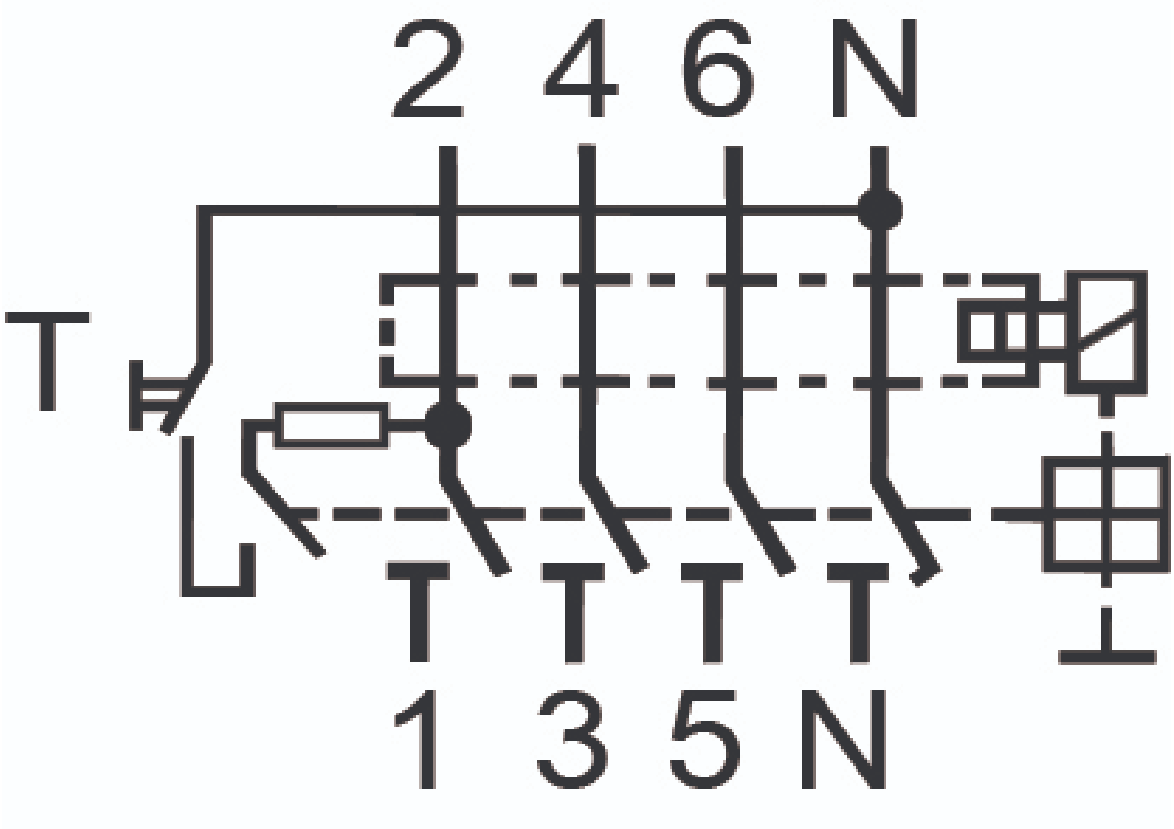
Basic Packaging

Basic packaging quantity	**1 pcs**
EAN code for a basic packaging	**3838895866404**
Basic packaging weight	**0.315 kg**
Basic Packaging Dimensions Height	**0.075 m**
Basic Packaging Dimensions Width	**0.09 m**
Basic Packaging Dimensions Depth	**0.074 m**
Basic packaging volume	**0 m³**

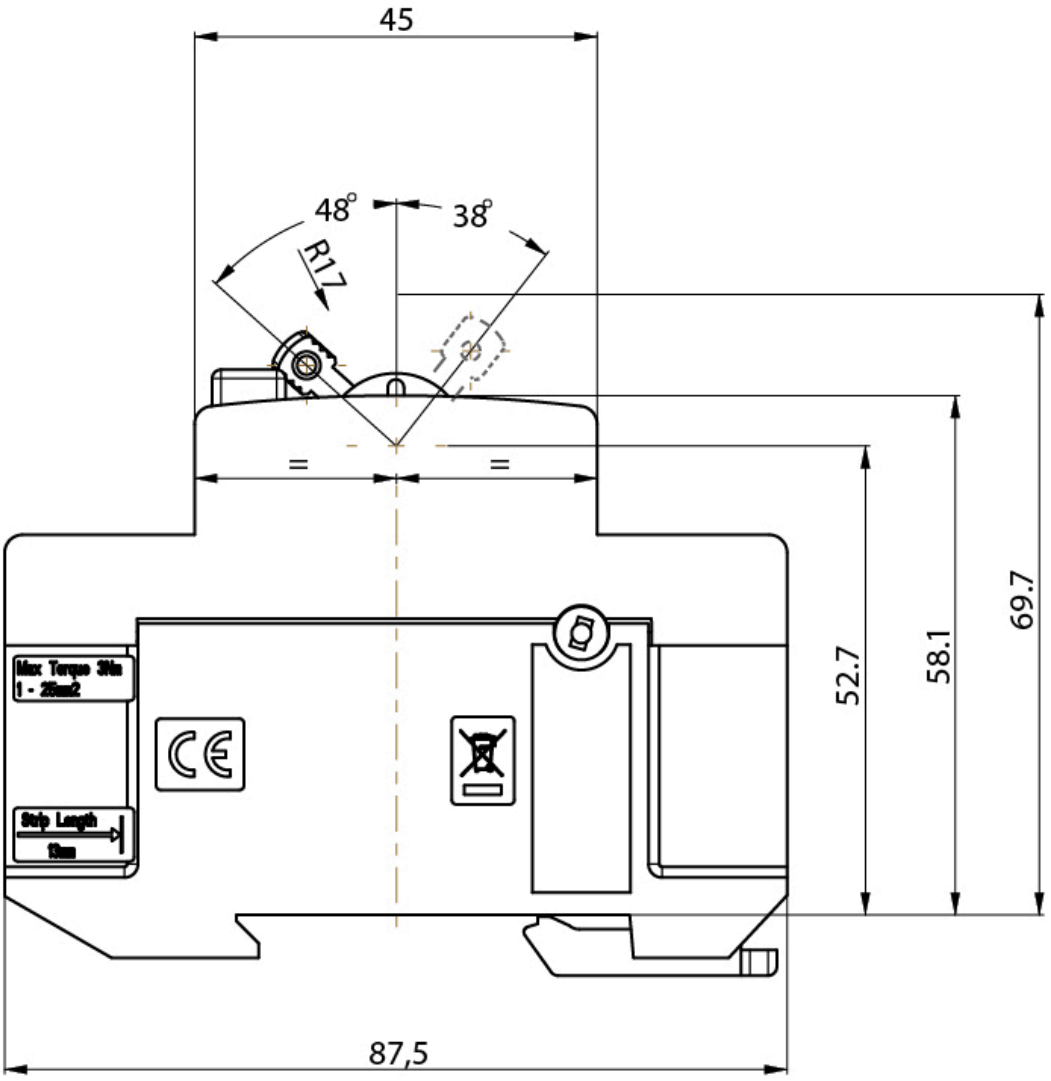
Transport Packaging

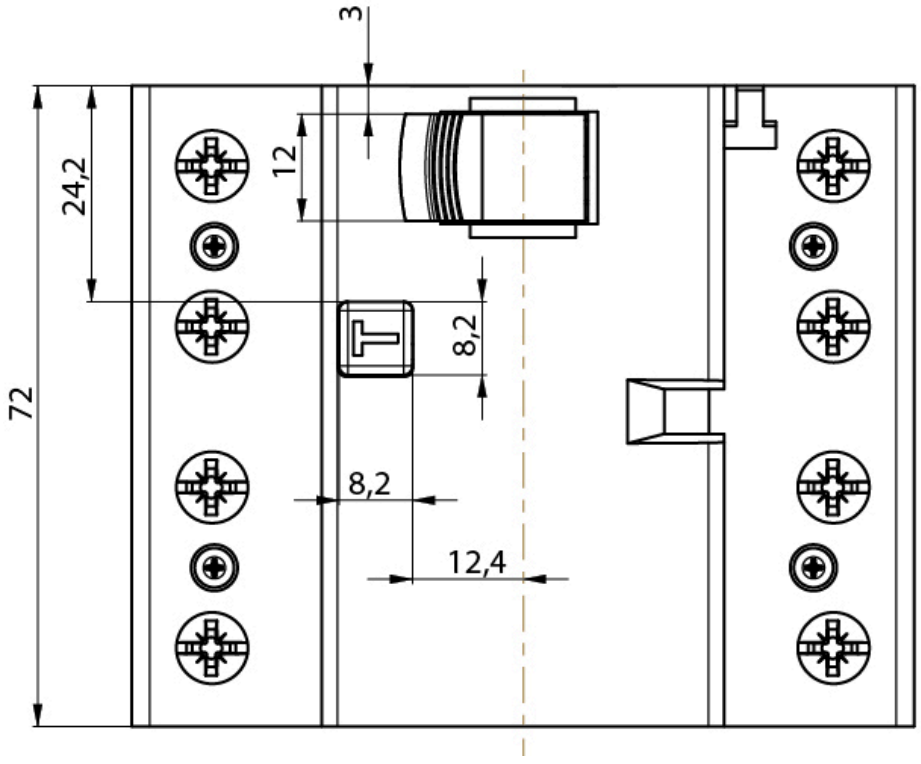
Transport packaging quantity	**27 pcs**
EAN code for a transport packaging	**3838895866411**
Transport packaging weight	**8.855 kg**
Transport Packaging Dimensions Height	**0.25 m**
Transport Packaging Dimensions Width	**0.235 m**
Transport Packaging Dimensions Depth	**0.295 m**
Transport packaging volume	**0.017 m³**
Pallet quantity	**1,404 pcs**
Customs tariff	**85362010**

Wiring diagram



Dimension


45
48°
38°
R17
52.7
58.1
69.7
87,5


3
12
24,2
8,2
72
8,2
12,4