

# LUXORliving iON2 SR

Item no.: 4802412

theben

Smart Home

Push buttons / Motion detectors

## Description

- Push-button sensor with 2 buttons and 2 status LEDs with integrated temperature sensor
- For controlling of the functions switching, dimming, blinds, scene in the LUXORliving system
- Multi-colored status LEDs
- Automatic brightness control of the status LEDs depending on the ambient brightness
- Integrated temperature sensor for room temperature control with LUXORliving heating actuators
- Transparent cover for individual labeling in the scope of delivery
- Installation of two ION push-button sensors on standard double socket with accessory possible (standard combination distance 71 mm)
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>



## Technical data

LUXORliving iON2 SR	
Operating voltage KNX	Bus voltage, $\leq 12.5$ mA
Ambient temperature	-5°C ... 45°C

LUXORliving iON2 SR	
Type of protection	IP 20
Protection class	III

Subject to technical changes and misprints

additional information at: [www.theben.de/product/4802412](http://www.theben.de/product/4802412)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# LUXORliving iON2 SR

Item no.: 4802412

**theben**

## Scale drawings

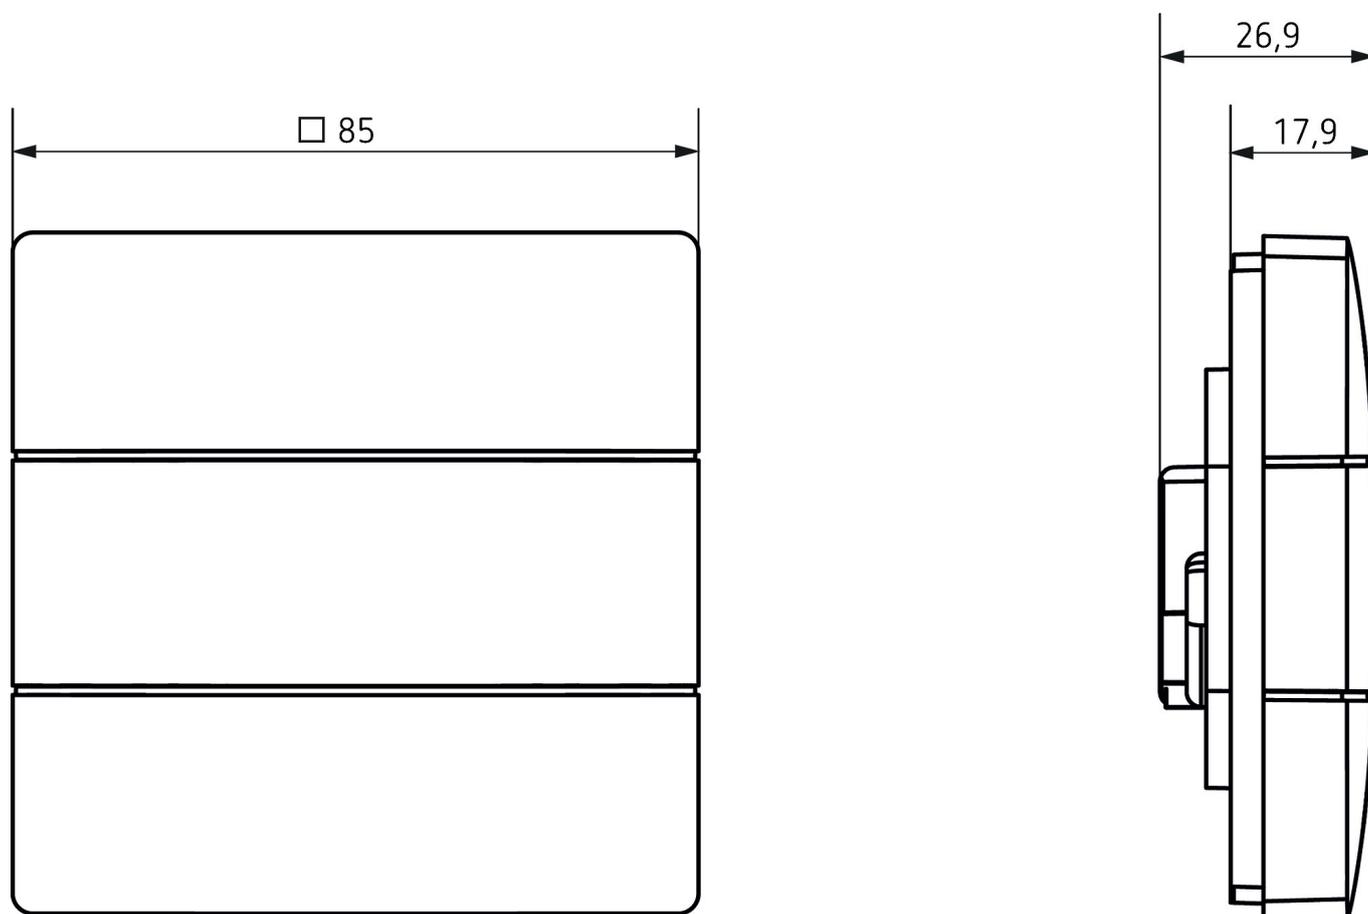

## Accessories

Surface Box iON BK  
Item no.: 9080025

2-way mounting plate iON BK  
Item no.: 9070855



Subject to technical changes and misprints

additional information at: [www.theben.de/product/4802412](http://www.theben.de/product/4802412)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.