

# LUXORliving S1

Item no.: 4800520

# theben

Smart Home  
Flush-mounted actuators

## Description

- 1-way flush-mounted switching actuator LUXORliving
- 1x NO contact & 1x NC contact with common control
- Adjustable features: NC/NO contact, switching, delayed switching, pulse function
- 2 binary inputs for floating contacts such as buttons, switches, temperature sensor (I2)
- The binary inputs are assigned to the switch output as standard (function test before programming)
- Integrated temperature monitoring for increased operating safety, e.g. in the event of overload
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>




## Technical data

LUXORliving S1	
Operating voltage KNX	Bus voltage, $\leq 4$ mA
Installation type	Flush-mounted
Number of channels	1
Type of contact	16 A
Incandescent/halogen lamp load	2000 W
Halogen lamp load	2000 W
Energy saving lamps	300 W

LUXORliving S1	
LED lamp < 2 W	50 W
LED lamp 2-8 W	600 W
LED lamp > 8 W	600 W
Inrush current	max. 740 A / 200 $\mu$ s
Ambient temperature	-5°C ... 45°C

## Connection example



Subject to technical changes and misprints

additional information at: [www.theben.de/product/4800520](http://www.theben.de/product/4800520)


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

# LUXORliving S1

Item no.: 4800520

theben

## Scale drawings

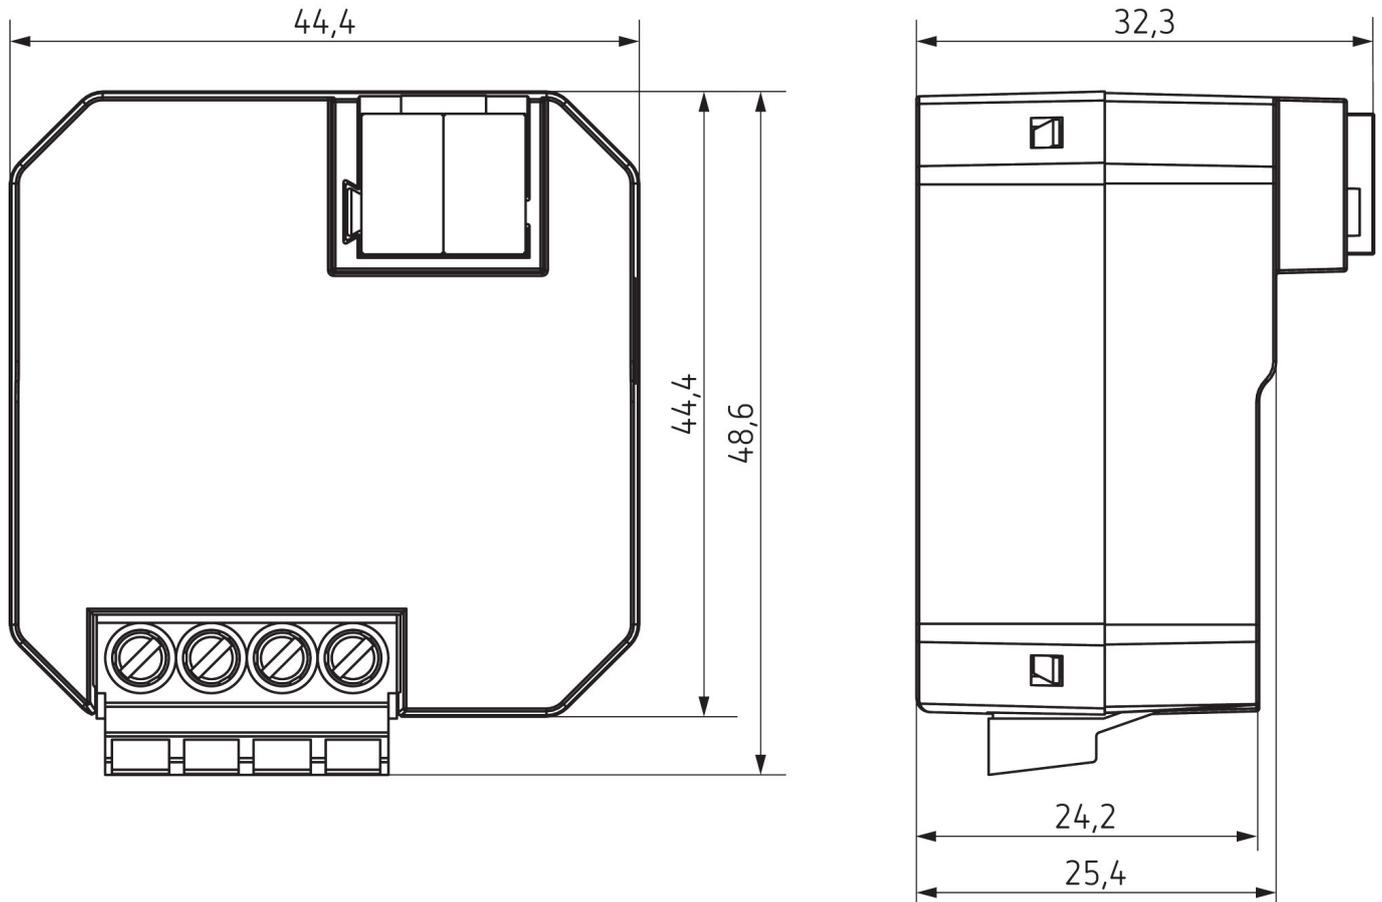


## Accessories

Temperature sensor  
Item no.: 9070321



Temperature sensor RAMSES IP  
65  
Item no.: 9070459

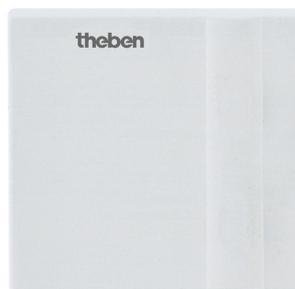

Flush-mounted temperature  
sensor  
Item no.: 9070496



Subject to technical changes and misprints

additional information at: [www.theben.de/product/4800520](http://www.theben.de/product/4800520)

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.