


Sensor/actuator combinations, wireless  
Sensor/switch actuator 1/1gang, wireless  
for ABB-free@home®

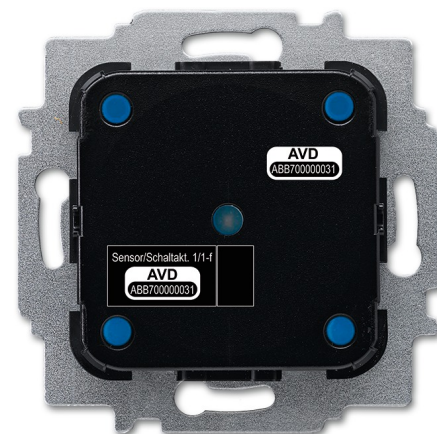

For switching 230 V~ consumers.

Communication with the free@home system is carried out wireless.

With integrated switch actuator.

Switching function is available also without prior programming (pre-configured).

Configuration can be changed later via the web interface (groups, scenes, etc.).

For contacting 1gang rocker 6230-10-xxx, 6231-10-xxx, 6232-10-xxx, 6233-10-xxx und 6234-10-xxx.

3 wire connection (neutral conductor required).

With 230 V extension unit input (On/Off).

With fixing claws.

Control element: Switch contacts top/bottom, Display elements: LED as light for orientation or display of the switching state,

Rated voltage: 230 V~, Rated frequency: 50 Hz / 60 Hz,

Outputs: 1 Normally open contact, potential-bound, Suitable for: ohmic, Rated current: 10 A, Output voltage: 230 V~, Rated power: 2300 W, Suitable for: capacitive, Rated current: 10 AX, Rated power: 2300 VA, Suitable for: inductive, Rated current: 10 A, Rated power: 2300 VA

Protection class (Device): IP 20, Temperature range (Device): -5 °C to 45 °C,

Dimensions: (L x W x D): 71 mm x 71 mm x 45 mm, Mounting depth: 32 mm,

Programming via the web interface of the System Access Point., Additional information about commissioning and operation is contained in the system manual and the online operating manual of the current Online-Catalogue.

Order Code : 2CKA006200A0074

Article No. : SSA-F-1.1.1-WL

EAN: 4011395215630