



TUV T8

TUV T8 F17 1SL/25

TUV T8 lamps are double-ended UVC (germicidal) lamps used in professional water and air disinfection units. TUV T8 lamps offer almost constant UV output over their complete lifetime, for maximum security of disinfection and high system efficacy. Moreover, they have a long and reliable lifetime, which allows maintenance to be planned for in advance.


Product data

General Information		Approval and Application	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]	Mercury (Hg) Content (Nom)	2.0 mg
Main Application	Disinfection		
Life To 10% Failures (Nom)	7500 h		
Useful Life (Nom)	9000 h		
System Description	-		
Light Technical		UV	
Color Code	TUV	UV-C Radiation at 100 hr	4.5 W
Color Designation	- [Not Specified]		
Depreciation at Useful Lifetime	15 %		
Operating and Electrical		Product Data	
Power (Nom)	16.7 W	Full product code	871150026413840
Lamp Current (Nom)	0.265 A	Order product name	TUV T8 F17 1SL/25
Voltage (Nom)	72 V	EAN/UPC - Product	8711500264138
		Order code	927941904020
		Numerator - Quantity Per Pack	1
		Numerator - Packs per outer box	25
		Material Nr. (12NC)	927941904020
		Net Weight (Piece)	100.000 g

Warnings and Safety

TUV T8



Dimensional drawing



Product	D (max)	A (max)	B (max)	B (min)	C (max)
TUV T8 F17 1SL/25	28 mm	589.8 mm	596.9 mm	594.5 mm	604.0 mm

TUV TL-D 18W

Photometric data

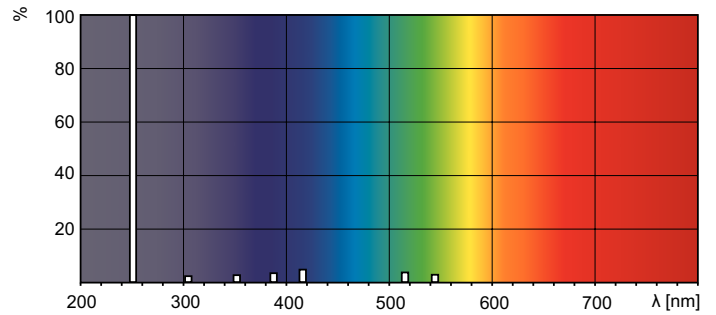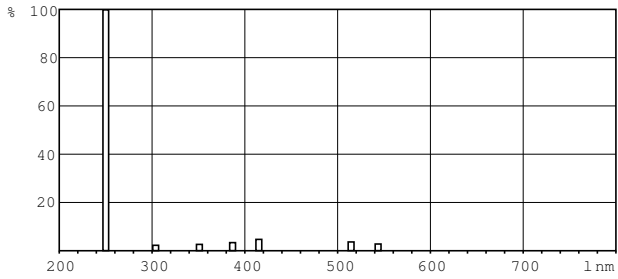

XDPB_XUTUVTLD-Spectral power distribution B/W

XDPO_XUTUVTLD-Spectral power distribution Colour

