


PCE data sheet

article#	413-1f66v
article description	CEE-flanged socket sloping (62x68mm) 16A 3p 1h IP44/IP54 locking
description long	CEE-flanged socket sloping (62x68mm) 16A 3p 1h IP44/IP54 locking housing material: PA6 rated current: 16A number of poles: 3 (2P+PE) clock-position: 1h rated voltage/frequency: >50V / others contacts: brass nickel plated connection technology: screw terminals dimensions (flange/fixing center): 62x68 mm / 47x47 mm lockable with padlock IP protection class: IP44/IP54
country of origin	AT
customs number	85366990
packaging quantity	10
minimum order quantity	10

ETIM 8.0	EC001317
IEC-ampereage	16 A
Voltage acc. EN 60309-2	Other
Number of poles	3
Clock hour position	1 h
Identification colour	Grey
Degree of protection (IP)	IP44
Connection system	Screwed terminal
Angle of plug	Angled
Material	Plastic
Contact material	CuZn
Surface finish contacts	Nickel-plated
Flange size vertical	68 mm
Drill hole distance vertical	47 mm
Flange size horizontal	62 mm
Drill hole distance horizontal	47 mm

wire flexible	1-2,5 mm ²
wire solid	1-4 mm ²
contact screws	100 Ncm
dismantling length	50 mm
stripping length	10-12 mm

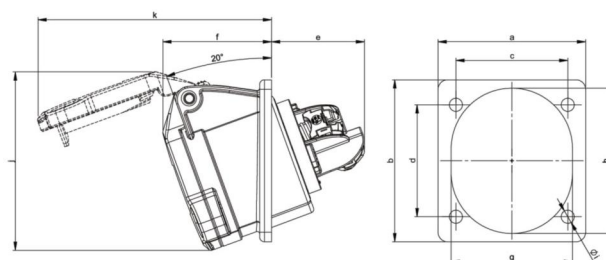

<https://www.pcelectric.at/shop/en/?func=detail&artnr=413-1f66v>



www.manufacturer-safety.info